

Page 1 of 1 South Well
Owner's Well No. (Replacement Well No. 3) No. 473553
Date Work Began 1-17-92, Ended 1-20-92
Local Permit Agency Monterey County Dept. of Health
Permit No. W 6576 Permit Date 1-6-92

- WELL OWNER

[illegible]

WELL LOCATION

Address 195 Monterey Dunes Way

City Castroville

County Monterey

APN Book 229 Page 041 Parcel 04

Township _____ Range _____ Section _____

Latitude _____ NORTH Longitude _____ WEST

- LOCATION SKETCH

(SEE ATTACHED)

- ACTIVITY ($\leq$)

☒ NEW WELL

MODIFICATION/REPAIR

___ Deepen

___ Other (Specify) _____

___ DESTROY (Describe Procedures and Material Under "GEOLOGIC LOG")

PLANNED USE(S)

(1)

___ MONITORING

WATER SUPPLY

☒ Domestic

___ Public

___ Irrigation

___ Industrial

___ "TEST WELL"

___ CATHODIC PROTECTION

___ OTHER (Specify) _____

SOUTH

Illustrate or Describe Distance of Well from Landmarks
such as Roads, Buildings, Fences, Rivers, etc.
PLEASE BE ACCURATE & COMPLETE

DRILLING METHOD Reverse Rotary FLUID _____
 _____ WATER LEVEL & YIELD OF COMPLETED WELL
 DEPTH OF STATIC _____
 WATER LEVEL 42 (Ft.) & DATE MEASURED 2-6-92
 ESTIMATED YIELD* 150 (GPM) & TEST TYPE Cont. flow
 TEST LENGTH 72 (Hrs.) TOTAL DRAWDOWN 33 (Ft.)
 * May not be representative of a well's long-term yield.

DEPTH FROM SURFACE			BORE-HOLE DIA. (Inches)	CASING(S)							DEPTH FROM SURFACE			ANNULAR MATERIAL				
				TYPE (✓)				MATERIAL / GRADE	INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS				SLOT SIZE IF ANY (Inches)	TYPE			
Ft.	to	Ft.	BLANK	SCREEN	CON- DUCTOR	FILL PIPE									Ft.	to	Ft.	CE- MENT (✓)
0	:	80	36			x		steel	30			0	:	1250	x			
0	:	310	26			x		"	20			1250	:	1255		x		
0	:	300	18	x				"	8			1255	:	1400				8 x 16
300	:	1323	"	x				"	6				:					
1323	:	1383	"		x			"	6		.040		:					
1383	:	1393	"	x				"	6				:					

ATTACHMENTS (✓)

- ☒ Geologic Log
- ☒ Well Construction Diagram
- ☐ Geophysical Log(s)
- ☐ Soil/Water Chemical Analyses
- ☒ Other vicinity map

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME Layne-Western Company
(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

P.O. Box 1326, Woodland, CA 95776

ADDRESS 1401 S. 1520, HOUSTON, TX 77010

Signed James W. Ward
WELL DRILLER/AUTHORIZED REPRESENTATIVE

CITY STATE ZIP

11-5-93 510011
DATE SIGNED FBI LICENSE NO.

135/2E-30N1
135/1E-25R1

SAMPLE LOG - WELL NO. 3


<u>Interval (Feet)</u>	<u>Description</u>
0 - 50	Sand (driller's description)
50 - 80	Clay (driller's description)
80 - 90	Clay, silty, some fine sand
90 - 110	Same, less silt
110 - 120	Same, increasing silt
120 - 140	Clay, black, with some coarse sand, and fine gravel, well rounded to angular
140 - 150	Clay, silty, black, with 20% sand
150 - 160	Gravel and sand, with some clay, gravel is sub- to well-rounded.
160 - 170	Clay, black, with slight amount of sand and gravel
170 - 190	Gravel, coarse, with up to 30% sand, well- rounded to angular
190 - 200	Gravel, decreasing grain size from above, subrounded to angular
200 - 210	Sand, very coarse, angular, with some gravel
210 - 220	Sand and gravel, 50% mixture, sand is fine grained, with minor clay
220 - 240	Sandy clay, brown, sand is fine grained
240 - 260	Silty clay, brown, with minor sand
260 - 270	Sandy clay, with some cemented fine- grained sand (sandstone)
270 - 280	Sand, medium to coarse grained, cemented, (sandstone), brown
280 - 290	Sandy clay, sand is fine grained, clay is brown
290 - 300	Sand, coarse grained, with some gravel, sub- to well rounded

FIGURE A-1

<u>Interval (Feet)</u>	<u>Description</u>
300 - 310	Clay, with less than 10% sand, brown
310 - 350	Sand, very fine grained, generally cemented (sandstone), light brown
350 - 360	Sand, very fine grained, light brown to gray color
360 - 370	Silt and siltstone, light brown color with minor fine sand
370 - 380	Gravel, subrounded, with some sand and silt
380 - 400	Clay, black, with some minor sand
400 - 440	Gravel, subrounded, with some very coarse sand
440 - 460	Gravel, clayey, with minor silt and sand
460 - 470	Gravel with some coarse sand
470 - 480	Gravel, clayey, light brown to tan
480 - 490	Gravel, subrounded, minor sand
490 - 500	Sand, fine grained and cemented, minor gravel, brown
500 - 520	Silty clay, brown, with minor sand
520 - 530	Sand, very fine grained, clayey
530 - 550	Gravel, clayey
550 - 570	Gravel, angular to subrounded
570 - 580	Clay, silty, brown
580 - 600	Sand, very fine grained, slightly cemented, slightly clayey
600 - 620	Silty clay, brown
620 - 660	Silty sand grading to sandy silt, sand grains angular, brown
660 - 680	Clay, silty, black, with organic matter (plant remains)
680 - 710	Clay, silty, with some fine sand

<u>Interval (Feet)</u>	<u>Description</u>
710 - 740	Clay, silty, grading to clayey silt, black
740 - 770	Clay, with very fine sand, brown
770 - 780	Clay, brown, with some dark organic matter
780 - 790	Clay, sandy, grading to a clayey sand, sand is fine to medium grained
790 - 800	Clay, silty, brown
800 - 850	Clay with trace of fine, angular sand, black
850 - 870	Clay, trace of fine sand, with organic (plant) material
870 - 890	Clay, with fine subrounded sand, black
890 - 910	Sand, fine grained, clayey, grading to clayey sand, some organic matter, black to brown
910 - 950	Clay, silty, black
950 - 960	Clay, silty, with trace of sand
960 - 980	Sand, very coarse, grading to fine gravel, well rounded, with shell fragments, trace of black silty clay
980 - 1000	Clay, silty, organic, with trace of fine gravel
1000 - 1030	Clay, silty, with organic material (plant remains)
1030 - 1040	Sand, fine grained, cemented, gray, with some black clay
1040 - 1070	Silty clay, with trace of fine gravel, black, with organic matter
1070 - 1080	Silty clay, black
1080 - 1100	Silty clay, black, with some shell fragments and organic matter
1100 - 1120	Silty clay, black, with trace of fine sand

<u>Interval (Feet)</u>	<u>Description</u>
1128 (core)	Sand, fine grained, gray
1130 (core)	Sand, slightly silty, very fine grained, gray
1168 (core)	Sand, medium to coarse grained, subrounded grains, gray
1170 (core)	Sand, very fine to coarse grained
1182 (core)	Sand, silty, very fine to coarse grained, gray
1200 - 1230	Clay, silty, black to gray
1230 - 1240	Sand, clayey, grading to sandy clay fine to very fine grained, black to gray
1240 - 1260	Silty clay, black
1260 - 1280	Silty clay with trace of fine silty sand, shell fragments, gray to black
1280 - 1320	Sand, fine to medium grained, gray, clayey, with abundant shell fragments and organic material (plant remains)
1320 - 1340	Sand, very fine grained, black to gray, with some black clay
1340 - 1350	Sand, very fine grained, with abundant shell fragments and organic matter
1350 - 1370	Sand, very fine grained, well rounded, gray, with some clay and shell fragments
1370 - 1380	Sand, very fine grained, as above, increasing silt and clay, gray to black
1380 - 1400	Silty clay, black
1400 - 1410	Sand, very fine grained, with some black clay and organic matter (plant material)
1410 - 1420	Sand, very fine grained, with some shell fragments

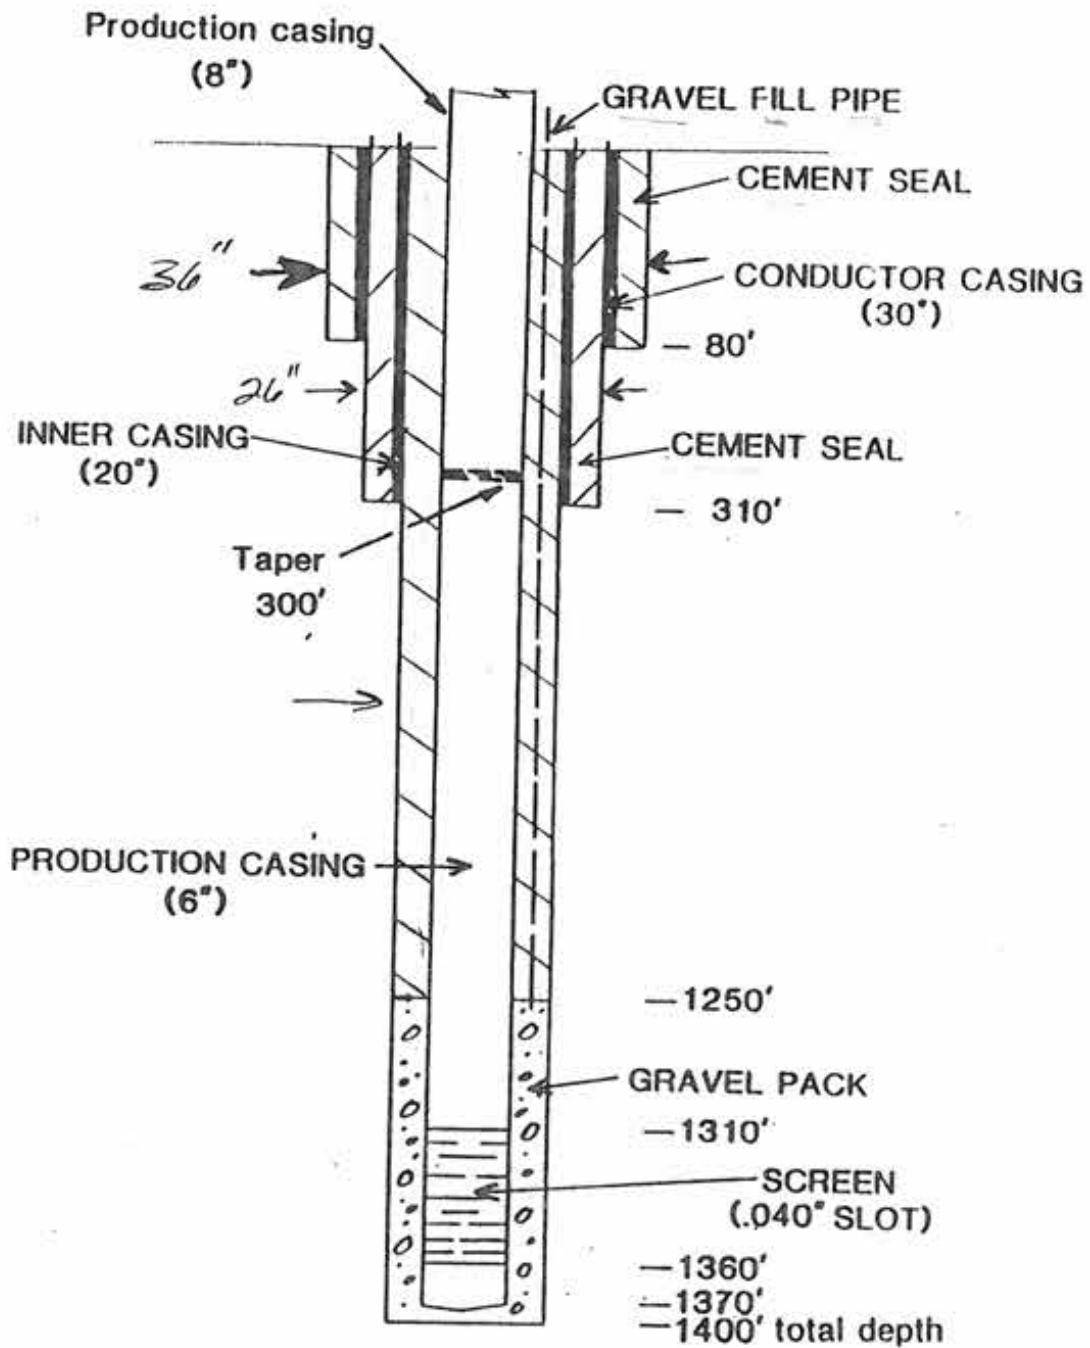

REVISED CASING DIAGRAM

REPLACEMENT WELL

not to scale



GEOCONSULTANTS, INC.

Geotechnical Consultants
Geology • Ground Water

1450 Koff Circle, Suite 114
San Jose, California 95112

G827-01A

ORIGINAL
File with DWR

STATE OF CALIFORNIA
DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

Do Not Fill In

No 141774

Well No 1351E-36J1
Other Well No

(1) OWNER:

Name
Address

(2) LOCATION OF WELL:

County Monterey
Approx. 500 yds. No. of
mouth of Salinas River
100 yds. East of Monterey Bay

(3) TYPE OF WORK (check):

New Well ☐ Deepening ☒ Reconditioning ☐ Destroying ☐

If destruction, describe material and procedure in Item 11

(4) PROPOSED USE (check):

Domestic ☒ Industrial ☐ Municipal ☐
Irrigation ☐ Test Well ☐ Other ☐

(5) EQUIPMENT:

Rotary ☒
Cable ☐
Other ☐

(6) CASING INSTALLED:

STEEL: OTHER:
SINGLE ☒ DOUBLE ☐

If gravel packed

From ft.	To ft.	Diam. in.	Gage on Wall	Diameter of Bore in.	From ft.	To ft.
0	320	7"		18"	1080	1488
320	1488	6"				

Size of casing at well ring

Size of gravel: #2 Aquarium

Material: Welded

(7) PERFORATIONS OR SCREEN:

Type of perforation or name of screen

From ft.	To ft.	Perf. per row	Rows per ft.	Size in. x in.
1298	1448	6	72	3/32 Full Flo. Stain- less steel

(8) CONSTRUCTION:

Is a surface sanitary seal provided? Yes ☒ No ☐ To what depth 1080 ft

Was the screen sealed against pollution? Yes ☒ No ☐ If yes, note depth of seal

From 0 ft. to 1080 ft.

From ft. to ft.

Method of sealing: Concrete & gravel shut

(9) WATER LEVELS:

Depth at which water was first found, if known

Standing level before perforating, if known

Standing level after perforating and developing

(10) WELL TESTS:

Was pump test made? Yes ☐ No ☐ If yes, by whom?

Gal./min. with ft. drawdown after hrs.

Temperature of water: Was a chemical analysis made? Yes ☐ No ☐

Was electric log made of well? Yes ☒ No ☐ If yes, attach copy

(11) WELL LOG:

Depth 1724 ft. Depth of completed well 1488 ft.

Notes: Describe location, character, size of material, and structure

0 - 648 Original well
648' - 749' Sand
749' - 766' Gray clay, sand
766' - 797' Clay & sand
797' - 828' Gray clay sand
828' - 859' " " "
859' - 890' " " "
890' - 921' " " "
921' - 952' Sand & Gray clay
952' - 983' Sand & clay
983' - 1019' Gray clay sand
1019' - 1050' Blue clay sand
1050' - 1081' Blue clay
1081' - 1112' Blue clay
1112' - 1143' Blue clay (Sea shell)
1143' - 1174' Blue clay, sand strks
1174' - 1205' Blue clay
1205' - 1236' Blue clay
1236' - 1267' Blue clay
1267' - 1298' " "
1298' - 1329' Clay & sand
1329' - 1360' Clay & sand
1360' - 1391' Clay & sand
1391' - 1421' Clay & sand
1421' - 1456' Clay & sand
1456' - 1479' Blue clay & sand
1479' - 1502' " " " "
1502' - 1571' " " " "
1571' - 1594' " " " "
1594' - 1617' " " " "
1617' - 1640' " " " "
1640' - 1663' " " " "
1663' - 1689' " " " "
1689' - 1704' " " " "
1704' - 1724' " " " "

Work started 1/18 19 77 Completed 2/14 19 77

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

NAME SALINAS PUMP CO.

(Person, firm, or corporation) (Typed or printed)

Address 1128 Madison KRA Lane
Salinas, Ca. 93901

[SIGNED] *Carson Thornton*
(Well Driller)

License No. 273053 Dated 2/16 19 77

SKETCH LOCATION OF WELL ON REVERSE SIDE

RECEIVED

F.C. #22681

MAR 29 2004

ORIGINAL
File with DWR RESOURCE PROTECTIONSTATE OF CALIFORNIA
WELL COMPLETION REPORT

Refer to Instruction Pamphlet

Page 1 of 2

Owner's Well No. #4

No. e011049 - ?

Date Work Began 01/24/04, Ended 03/10/04

Local Permit Agency Monterey Dunes Health Dept.

Permit No. 03-01231

Permit Date 11/18/03

DWR USE ONLY - DO NOT FILL IN

STATE WELL NO./STATION NO. 135/01E-36J02

LATITUDE 135/01E-36J02

LONGITUDE 135/01E-36J02

APN/TRS/OTHER

GEOLOGIC LOG

ORIENTATION (Z) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DEPTH FROM SURFACE

FL to FL

DRILLING METHOD Direct Rotary FLUID Bentonite

DESCRIPTION

Describe material, grain size, color, etc.

0	80	Fine to coarse sand
80	90	Fine to coarse sand w/blue clay
90	100	Fine to med. sand
100	123	Fine to med. sand w/clay lenses
123	143	Blue clay w/fine to med. sand
143	154	Blue clay w/fine to coarse sand and gravel
154	165	Fine to coarse sand w/gravel and rock
165	187	Fine to med. sand & cobbles with clay lenses
187	197	Fine to med. sand
197	219	Fine to coarse sand
219	250	Fine to coarse sand & gravel
250	304	Fine to coarse sand & cobbles
304	314	Fine to coarse sand w/clay and cobbles
314	355	Fine to coarse sand w/90% clay
355	366	Fine to coarse sand w/clay
366	387	Fine to med. sand w/clay lenses
387	408	Fine to med. sand w/50% clay
408	418	Fine to coarse sand
418	440	Fine to coarse sand & gravel
440	455	Fine to coarse sand w/40% clay
455	461	Fine to coarse sand & gravel with 50% clay
461	485	Fine to coarse sand & gravel
485	505	Fine to coarse sand
505	556	Fine to coarse sand & gravel
556	577	Fine to coarse sand w/red clay

TOTAL DEPTH OF BORING: 1422 (Feet)

TOTAL DEPTH OF COMPLETED WELL 1364 (Feet)

WELL OWNER PRESSURE-DEEPWELL LOCATION
Address 195 Monterey Dunes WayCity CastrovilleCounty MontereyAPN Book 229 Page 041 Parcel 004Township Range Section SectionLatitude DEG. MIN. SEC. Longitude DEG. MIN. SEC. WEST

LOCATION SKETCH



Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Acre, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

ACTIVITY (Z)

☒ NEW WELL

MODIFICATION/REPAIR

☐ Deepen
☐ Other (Specify)

DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (Z)

WATER SUPPLY

☐ Domestic ☐ Public
☐ Irrigation ☐ Industrial

MONITORING

☐ TEST WELL

CATHODIC PROTECTION

☐ HEAT EXCHANGE☐ DIRECT PUSH☐ INJECTION☐ VAPOR EXTRACTION☐ SPARGING☐ REMEDIATION☐ OTHER (SPECIFY)

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER N/A (FL) BELOW SURFACEDEPTH OF STATIC WATER LEVEL 13 (FL) & DATE MEASURED 03/04/04ESTIMATED YIELD 200 (GPM) & TEST TYPE PumpTEST LENGTH 24 (Hrs.) TOTAL DRAWDOWN 42 (FL)

* May not be representative of a well's long-term yield. 24 hour Test

DEPTH FROM SURFACE										BORE-HOLE DIA. (Inches)										CASING (S)										DEPTH FROM SURFACE										ANNULAR MATERIAL																																																																															
FL to FL										TYPE (Z)										MATERIAL / GRADE										INTERNAL DIAMETER (Inches)										GAUGE OR WALL THICKNESS										SLOT SIZE IF ANY (Inches)										TYPE																																																											
										BLANK SCREEN CONDUCTOR FILL PIPE																																																		CE-MENT (Z)										BEN-TONITE (Z)										FILL (Z)										FILTER PACK (TYPE/SIZE)																													
0 60										36																				A53B										29.260										.375																				0 60										X																				10 sack																			
0 321										28																				A53B										19.260										.375																				0 321										X																				10 sack																			
+2 1221										18										X										A53B										8"										.322																				0 1220										X																				Neat cem.																			
1221 1301										18										X										304ss										8"										.322																				1220 1370																				X										8x16																			
1301 1361										18										X										304ss										8"										XXHD										.040																																																											
1361 1364										18										X										304ss										8"										.322																																																																					
ATTACHMENTS (Z)																																																																																																																							

ATTACHMENTS (Z)

- ☐ Geologic Log
- ☐ Well Construction Diagram
- ☒ Geophysical Log(s)
- ☐ Soil/Water Chemical Analyses
- ☒ Other Site map

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME Rottman Drilling Co.

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

ADDRESS 46471 N Division, Lancaster, CA 93535SIGNED Larry W. Rottman, President

CITY

STATE

ZIP

DATE SIGNED 03/19/04C-57 LICENSE NUMBER 316599

Copy to WR

ORIGINAL
File with DWR
Page 2 of 2

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

Owner's Well No. #4 No. e011049
Date Work Began 01/24/04 Ended 03/10/04
Local Permit Agency Monterey Dunes Health Dept.
Permit No. 03-01231 Permit Date 11/18/03

DWR USE ONLY - DO NOT FILL IN

135/01/EI-316J02

STATE WELL NO./STATION NO.

LATITUDE LONGITUDE

135/01/EI-316J02

APN/TRS/OTHER

GEOLOGIC LOG

ORIENTATION () ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DEPTH FROM SURFACE

FL to FL

DRILLING METHOD Direct Rotary FLUID Bentonite

DESCRIPTION

Describe material, grain size, color, etc.

577	610	Fine to coarse sand, rock & clay
610	620	Fine to coarse sand
620	630	Fine to coarse sand & gravel
630	650	Fine to coarse sand & gravel with clay lenses
650	661	Fine to med. sand with clay
661	681	Fine sand with clay
681	693	Fine sand & gravel w/clay lenses
693	725	80% Silty clay w/20% hard sand
725	737	90% Hard silty clay & sand lenses
737	767	90% Hard silty clay w/sand rock lenses
767	791	95% Hard packed clay - cemented
791	820	Brown silty clay (hard packed)
820	882	Grayish brown clay w/blue stricks
882	945	Clay with rock
945	1011	Clay w/fine sand & silt
1011	1105	20% Clay w/fine to med. sand
1105	1170	Fine sand and silt
1170	1190	Clay w/fine sand, silt & rock
1190	1230	Fine sand, silt & rock
1230	1270	Clay with fine sand
1270	1290	Silt & clay
1290	1365	Fine sand
1365	1391	Clay w/fine sand lenses
1391	1422	Fine sand

TOTAL DEPTH OF BORING: 1422 (Feet)

TOTAL DEPTH OF COMPLETED WELL 1364 (Feet)

WELL OWNER

City Castroville State CA

WELL LOCATION

Address 195 Monterey Dunes Way

City Castroville

County Monterey

APN Book 229 Page 041 Parcel 004

Township Range Section

Latitude NORTH Longitude WEST

DEG. MIN. SEC. DEG. MIN. SEC.

LOCATION SKETCH

NORTH

WEST

SOUTH

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

ACTIVITY ()

☒ NEW WELL

MODIFICATION/REPAIR

☐ Deepen

☐ Other (Specify)

☐ DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES ()

WATER SUPPLY

☐ Domestic ☐ Public

☐ Irrigation ☐ Industrial

MONITORING ☐

TEST WELL ☐

CATHODIC PROTECTION ☐

HEAT EXCHANGE ☐

DIRECT PUSH ☐

INJECTION ☐

VAPOR EXTRACTION ☐

SPARGING ☐

REMEDIATION ☐

OTHER (SPECIFY) ☐

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER 12 (FL) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL 13 (FL) & DATE MEASURED 03/02/04

ESTIMATED YIELD 500 (GPM) & TEST TYPE Pump

TEST LENGTH 4 (hrs.) TOTAL DRAWDOWN 102 (FL)

* May not be representative of a well's long-term yield. (Step Test)

DEPTH FROM SURFACE			BORE-HOLE DIA. (Inches)	CASING (S)					DEPTH FROM SURFACE			ANNULAR MATERIAL			
				TYPE ()			MATERIAL / GRADE	INTERNAL DIAMETER (Inches)				GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	TYPE	
FL	to	FL		BLANK	SCREEN	CORROSION-RESISTANT FILL PIPE			CE- MENT ()	BEN- TONITE ()	FILL ()			FILTER PACK (TYPE/SIZE)	
0	60	36			X	A53B	29.260	.375		0	60	X			10 sack
0	321	28			X	A53B	19.260	.375		0	321	X			10 sack
+2	1221	18	X			A53B	8"	.322		0	1220	X			Neat cem.
1221	1301	18	X			304ss	8"	.322		1220	1370			X	8x16
1301	1361	18		X		304ss	8"	XXHD	.040						
1361	1364	18	X			304ss	8"	.322							

ATTACHMENTS ()

☐ Geologic Log

☐ Well Construction Diagram

☒ Geophysical Log(s)

☐ Soil/Water Chemical Analyses

☐ Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME Rottman Drilling Co.


(PERSON, FIRM OR CORPORATION) (TYPED OR PRINTED)

46471 N Division, Lancaster, CA 93535

ADDRESS CITY STATE ZIP

Signed [Signature] Date Signed 03/19/04 316599

WELL DRILLER AUTHORIZED REPRESENTATIVE DATE SIGNED C-57 LICENSE NUMBER

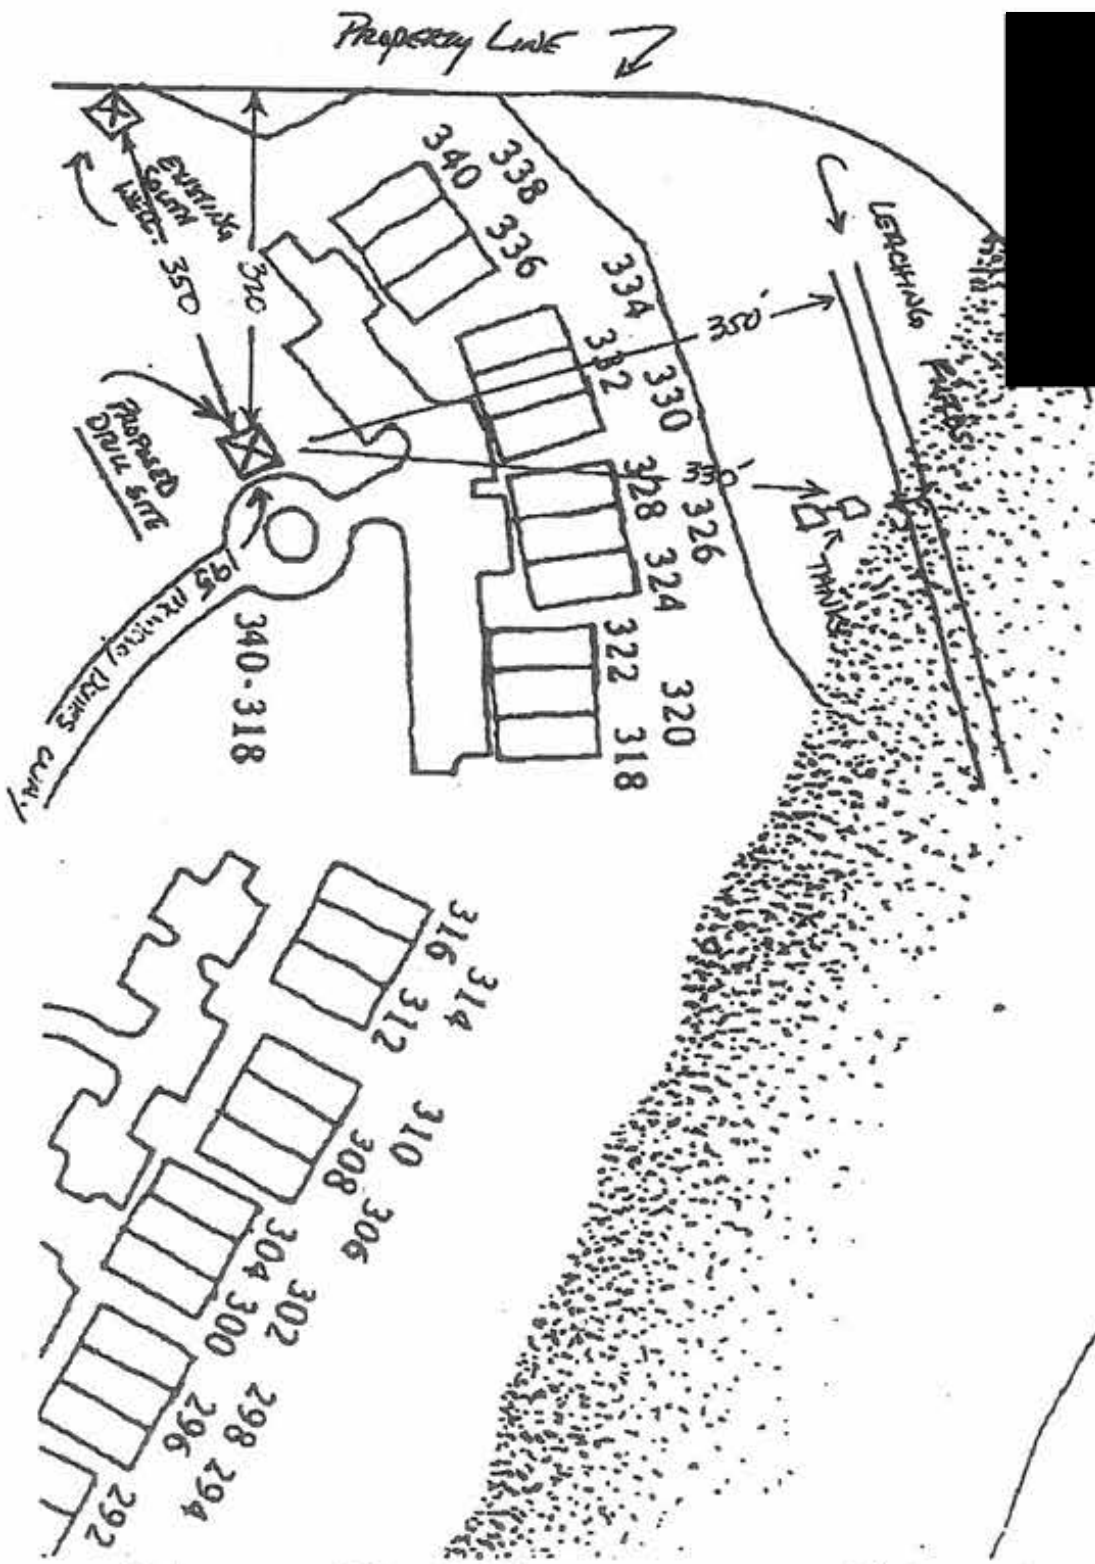

Owner's Copy

STATE OF CALIFORNIA
THE RESOURCES AGENCY
DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

Do not fill in


No. 071658

Intent No. _____
License Permit No. or Date **W-2612**

State Well No. **135/2E-1903**
Other Well No. **900 FT AQ**

(2) LOCATION OF WELL (See instructions):

County **Monterey** Owner's Well Number **#3**
Well address if different from above _____
Township **13S** Range **2E** Section _____
Distance from cities, roads, railroads, fences, etc. **0.25 mile west of Jct. of Molera Rd. & Hwy. 1, 200' ENE of Leonardini #2.**

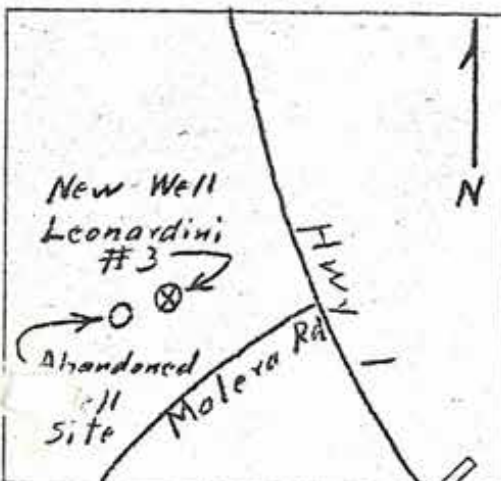

(3) TYPE OF WORK:

New Well ☒ Deepening ☐
Reconstruction ☐
Reconditioning ☐
Horizontal Well ☐
Destruction ☐ (Describe destruction materials and procedures in Item 12)

(4) PROPOSED USE:

Domestic ☐
Irrigation ☒
Industrial ☐
Test Well ☐
Stock ☐
Municipal ☐
Other ☐

(12) WELL LOG: Total depth **1610** ft. Depth of completed well **1562** ft.

from ft.	to ft.	Formation (Describe by color, character, size or material)
0	12	Clay
12	22	Sandy Clay
22	36	Sand & Gravel
36	39	Yellow Clay
39	60	Fine Sand w/ Rock
60	70	Blue Sandy Clay
70	83	Blue Clay
83	131	Sand Gravel & Rock
131	220	Yellow & Blue Clay
220	315	Rock & Clay Shale
315	412	Blue Sandy Clay
412	433	Sand w/ Clay
433	975	Blue Sandy Clay
975	1095	Sand Gravel & Rock
1095	1142	Blue Sandy Clay
1142	1155	Clay Blue
1155	1170	Sand & Shale
1170	1195	Blue Clay
1195	1247	Sand & Blue Clay
1247	1295	Blue Clay
1295	1308	Sand & Blue Clay
1308	1317	Sandy Blue Clay
1317	1380	Sand, Shale, Blue Clay
1380	1395	Sandy Blue Clay
1395	1475	Sand, Shale, Rock
1475	1488	Sandy Blue Clay
1488	1500	Sand & Clay
1500	1519	Fine Sand & Clay
1519	1610	Fine Sandy Clay

POOR DESCRIPTION
ELECTRIC LOG SHOWS MUCH MORE VARIATION

(5) EQUIPMENT:

Rotary ☐ Reverse ☒
Cable ☐ Air ☐
Other ☐ Bucket ☐

(6) GRAVEL PACK:

Yes ☒ No ☐ Size **12 x 20**
Diameter of bore **28"**
Packed from **1190'** to **1610'**

(7) CASING INSTALLED:

Steel ☒ Plastic ☐ Concrete ☐

(8) PERFORATIONS:

Type of perforation or size of screen

From ft.	To ft.	Dia. in.	Cage or Wall	From ft.	To ft.	Slot size
0	566	16	5/16"	1220	1250	3/32"
566	1220	12	1/4"	1200	1580	
1250	1262	12	1/4"			

(9) WELL SEAL:

Was surface sanitary seal provided? Yes ☒ No ☐ If yes, to depth **170** ft.
Were strata sealed against pollution? Yes ☒ No ☐ Interval _____ ft.
Method of sealing **Concrete 550' to 600' & 1080' to 1190'**

(10) WATER LEVELS:

Depth of first water, if known **18'** ft.
Standing level after well completion **+1.5' AGL** ft.

(11) WELL TESTS:

Was well test made? Yes ☒ No ☐ If yes, by whom? **Luhdorff**
Type of test Pump ☒ Bailor ☐ Air lift ☐
Depth to water at start of test **+1.5** ft. At end of test **233.8** ft.
Flow **1500** gal/min after **24** hours Water temperature **92°F**
Chemical analysis made? Yes ☒ No ☐ If yes, by whom? **P.G. & E.**
Was electric log made? Yes ☒ No ☐ If yes, attach copy to this report

Work started **10 Feb. 1980** Completed **2 May 1980**

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

SIGNED

Robert L. Vincent (Well Driller)
NAME **E.E. Luhdorff Co./Div. of Layne-Western Co., Inc**

(Person, firm, or corporation) (Typed or printed)

Address **P.O. Box 1326, 275 Co. Rd. 98**

City **Woodland, CA**

License No. **334205**

Date of this report **5-20-80**

ORIGINAL

File with DWR

STATE OF CALIFORNIA

THE RESOURCES AGENCY

DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

135/2E-31A2 2

Do not fill in

No. 064000

of Intent No.

Permit No. or Date 3628

State Well No.

Other Well No.

2) LOCATION OF WELL (See instructions):

County Monterey

Well address if different from above

Township Castroville

Range

Section

Distance from cities, roads, railroads, fences, etc.

(3) TYPE OF WORK:

New Well ☒ Deepening ☐Reconstruction ☐Reconditioning ☐Horizontal Well ☐Destruction ☐ (Describe destruction materials and procedures in Item 12)

(4) PROPOSED USE:

Domestic ☐Irrigation ☒Industrial ☐Test Well ☐Stock ☐Municipal ☐Other ☐

WELL LOCATION SKETCH

5) EQUIPMENT:

Rotary ☒ Reverse ☐Able ☐ Air ☐Other ☐ Bucket ☐

(6) GRAVEL PACK:

Yes ☒ No ☐ Size 6X12, 8X16

Diameter of bore 26

Packed from 850 to 1600 ft.

7) CASING INSTALLED:

Steel ☒ Plastic ☐ Concrete ☐

(8) PERFORATIONS:

Type of perforation or size of screen

From ft.	To ft.	Dia. in.	Gage or Wall	From ft.	To ft.	Size
0	400	16	3/8	850	1600	332
400	1600	12	5/16			

(12) WELL LOG: Total depth 1635 ft. Depth of completed well 1600 ft.

from ft.	to ft.	Formation (Describe by color, character, size or material)
0	3	Black top soil
3	8	Sandy yellow clay
8	40	brown clay
40	79	soft blue caly
79	95	fine sand
95	121	soft blue clay & sand
121	142	fine sand
142	190	coarse sand & pea gravel
190	235	yellow clay & sand
235	338	red sand
338	343	yellow clay
343	408	med coarse sand
408	430	coarse sand
430	490	gravel, coarse sand
490	578	gravel & coarse sand, sktYel cly
578	584	yellow clay
584	645	coarse sand colored
645	656	coarse sand & red clay
656	705	coarse sand, yellow & gravel
705	790	sandy yellow & blue clay
790	894	yellow clay skts blue clay
894	950	yellow clay & some blue & wht
950	982	clay, skts sand
982	1030	Blue & yellow clay
1030	1092	blue clay & yellow & brn
1092	1114	Blue clay & fine blk sand
1114	1180	coarse sand & fine sand
1180	1270	blk fine sand & blue clay
1270	1312	blue clay & fine sand, sm gravel
1312	1334	blue clay & blk sand
1334	1422	blk sand & blue clay, sm gravel
1422	1450	blue clay & blk sand
1450	1532	red coarse sand
1532	1635	blk sand & blue clay
		blue & wht clay & blk sand

9) WELL SEAL:

Was surface sanitary seal provided? Yes ☒ No ☐ If yes, to depth 850 ft.Were strata sealed against pollution? Yes ☒ No ☐ Interval 0-850 ft.

Method of sealing Concrete

10) WATER LEVELS:

Depth of first water, if known 4' ft.

Standing level after well completion 26' ft.

11) WELL TESTS:

Was well test made? Yes ☒ No ☐ If yes, by whom? Salinas PumpType of test Pump ☒ Bailer ☐ Air lift ☐

Depth to water at start of test 26' ft.

At end of test 26' ft.

Rate 3000 gal/min after 48 hours

Water temperature warm

Local analysis made? Yes ☐ No ☐ If yes, by whom?Was electric log made? Yes ☒ No ☐ If yes, attach copy to this report

Work started 5/21/85

Completed 9/30/85

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

SIGNED *Carson Hunter* (Well Driller)

NAME Salinas Pump Co.

(Person, firm, or corporation) (Typed or printed)

Address 324 Kings St.

City Salinas, Ca.

Zip 93905

License No. 273053

Date of this report 9/25/85


TRIPLICATE
Owner's Copy

STATE OF CALIFORNIA
THE RESOURCES AGENCY
DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

Do not fill in
No. 176635

Intent No. _____
Well No. or Date _____

State Well No. 135/2E-32E5
Other Well No. _____



1) LOCATION OF WELL (See instructions):
County Monterey County Owner's Well Number _____
Well address if different from above _____
Township 13S Range 2E Section 32E
Distance from cities, roads, railroads, fences, etc. _____
1 mile northwest of Molera Rd., 1/2 mile north
east in field

(3) TYPE OF WORK:

New Well ☒ Deepening ☐

Reconstruction ☐

Reconditioning ☐

Horizontal Well ☐

Destruction ☐ (Describe destruction materials and procedures in Item 12)

(4) PROPOSED USE:

Domestic ☐

Irrigation ☐

Industrial ☐

Test Well ☐

Stock ☐

Municipal ☐

Other Observation

(12) WELL LOG: Total depth 1650 ft. Depth of completed well 1605 ft.
from ft. to ft. Formation (Describe by color, character, size or material)

-0- - 4 Black top soil

4 - 60 Sandy brown clay

60 - 70 Clay

70 - 90 Sand

90 - 115 Clay

115 - 140 Gravel & Sand

140 - 150 Clay

150 - 180 Sand

180 - 245 Sandy clay

245 - 290 Gravel (large) & sand mix

290 - 310 Clay

310 - 340 Sand & Gravel

340 - 410 Sandy clay

410 - 425 Sand & Gravel

425 - 440 Clay

440 - 485 Sand & Gravel

485 - 585 Sandy clay

585 - 595 Sand

595 - 780 Clay with sand streaks

780 - 800 Sand

800 - 960 Clay with occasional sand streaks

960 - 975 Sand

975 - 1105 Clay

1105 - 1115 Sand (cemented)

1115 - 1430 Clay with some sand streaks

1430 - 1460 Sand

1460 - 1470 Clay

1470 - 1530 Sand

1530 - 1540 Clay

1540 - 1570 Sand

1570 - 1650 Clay

WELL LOCATION SKETCH

5) EQUIPMENT:

Rotary ☒ direct Reverse ☐

able ☐ Air ☐

ther ☐ Bucket ☐

7) CASING INSTALLED:

Steel ☒ Plastic ☐ Concrete ☐

From ft. To ft. Dia. in. Casing or Wall

From ft. To ft. Slot size

0- 120 3-3/16 775 1585 050-065

20 123= 3-6" reducer

23 775 6"

9) WELL SEAL casing cont; 1585'- 1605' Plain

Is surface sanitary seal provided? Yes ☒ No ☐ If yes, to depth 755 ft.

Were strata sealed against pollution? Yes ☐ No ☐ Interval _____ ft.

Method of sealing Cement

10) WATER LEVELS:

Depth of first water, if known _____ ft.

Standing level after well completion _____ ft.

11) WELL TESTS:

Was well test made? Yes ☐ No ☐ If yes, by whom? _____

Type of test Pump ☐ Bailor ☐ Air lift ☐

Depth to water at start of test _____ ft. At end of test _____ ft.

Production _____ gal/min after _____ hours Water temperature _____

Analysis made? Yes ☐ No ☐ If yes, by whom? _____

Electric log made? Yes ☐ No ☐ If yes, attach copy to this report

Work started 8-10 1984 Completed 10-15 1984

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

SIGNED _____ (Well Driller)

NAME EATON DRILLING CO

(Person, firm, or corporation) (Typed or printed)

Address P.O. BOX 975

City WOODLAND, CA. Zip 95695

License No 133783 C57 Date of this report 11-15-84

ORIGINAL

File with DWR

No. of Intent No. _____

L. Permit No. or Date _____

STATE OF CALIFORNIA
THE RESOURCES AGENCY
DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

CAVGL/MRRP

900'A.

Do not fill in

No. 225551

State Well No. 135/2E-32M2

Other Well No. _____


(2) LOCATION OF WELL (See instructions):

County Monterey Owner's Well Number _____

Well address if different from above _____

Township _____ Range _____ Section _____

Distance from cities, roads, railroads, fences, etc. _____

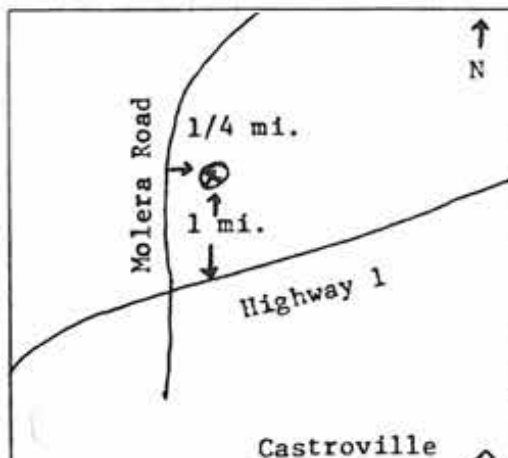

WELL LOCATION SKETCH

(3) TYPE OF WORK:

New Well ☒ Deepening ☐Reconstruction ☐Reconditioning ☐Horizontal Well ☐Destruction ☐ (Describe destruction materials and procedures in Item 12)

(4) PROPOSED USE:

Domestic ☐Irrigation ☒Industrial ☐Test Well ☐Stock ☐Municipal ☐Other ☐

(5) EQUIPMENT:

Rotary ☒ Reverse ☐Cable ☐ Air ☐Other ☐ Bucket ☐

(6) GRAVEL PACK:

Yes ☒ No ☐ Size 24

Diameter of bore _____

Packed from 790 to 1630

(7) CASING INSTALLED:

Steel ☐ Plastic ☐ Concrete ☐

From ft. To ft. Dia. in. Casing or Wall

0 400 16 5/16

400 780 12 "

1590 1610 12 "

(8) PERFORATIONS:

Type of perforation or size of screen

From ft. To ft. Size

780 1590 .060

(9) WELL SEAL:

Was surface sanitary seal provided? Yes ☒ No ☐ If yes, to depth 780' ft.Were strata sealed against pollution? Yes ☐ No ☐ Interval _____ ft.Method of sealing cement grout

(10) WATER LEVELS:

Depth of first water, if known _____ ft.

Standing level after well completion 19' ft.

(11) WELL TESTS:

Was well test made? Yes ☐ No ☐ If yes, by whom? _____Type of test Pump ☐ Bailor ☐ Air lift ☐From _____ to water at start of test 19 ft. At end of test 190 ft.Discharge 2260 gal/min after 3 hours Water temperature _____Chemical analysis made? Yes ☐ No ☒ If yes, by whom? _____Was electric log made? Yes ☒ No ☐ If yes, attach copy to this report(12) WELL LOG: Total depth _____ ft. Depth of completed well _____ ft.
from ft. to ft. Formation (Describe by color, character, size or material)

0 - 75 Blue

75 - 90 Sand & gravel

90 - 115 Blue Clay

115 - 120 Sand

120 - 124 Wood

124 - 145 Sand & gravel

145 - 154 Blue Clay

154 - 211 Sand & gravel & boulders

211 - 260 Clay -- brown, hard

260 - 289 Brown sandy clay

289 - 295 Cemented cobbles & sand

295 - 308 Sticky tan & gray clay

308 - 321 Sandy brown clay with some gravel

321 - 337 Blue clay & shale, some br. clay

337 - 342 Cemented sand & gravel

342 - 350 Brown sandy clay

350 - 362 Brown sticky clay

362 - 405 Brown sandy clay

405 - 490 Coarse sand

490 - 441 Sticky gray clay

441 - 540 Sand & gravel, streaks white clay

540 - 570 Clay & small gravel

570 - 620 Coarse sand

620 - 665 Reddish brown sandy clay

665 - 740 Tan & gray sticky clay

740 - 760 Blue clay

760 - 765 Sticky gray clay

765 - 780 Tan clay

780 - 800 Sand & gravel

800 - 847 Tan clay

847 - 962 Blue clay

962 - 980 Sand & gravel

980 - 1020 Blue clay

1020 - 1050 Streaks of sand, gravel & bl. clay

1050 - 1068 Sand & gravel

1068 - 1102 Blue clay

1102 - 1150 Hard cemented sand & gravel

1150 - 1160 Blue sandy clay

Work started _____ 19 _____ Completed _____ 19 _____

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

Signed Reginald E. Gutman (Well Driller)NAME Cofferdam Unwatering Corporation

(Person, firm, or corporation) (Typed or printed)

Address 3362 Fitzgerald RoadCity Rancho Cordova, California Zip 95670License No. 292555 Date of this report 12-5-84

No. 225552

State Well No. 135/2E-32M2

Other Well No.

If Intent No.

Permit No. or Date

WNER: Name

(12) WELL LOG: Total depth _____ ft. Depth of completed well _____ ft.

Address

from ft. to ft. Formation (Describe by color, character, size or material)

City _____ Zip _____

(2) LOCATION OF WELL (See instructions):

County _____ Owner's Well Number _____

Well address if different from above _____

Township _____ Range _____ Section _____

Distance from cities, roads, railroads, fences, etc. _____

(3) TYPE OF WORK:

New Well ☐ Deepening ☐Reconstruction ☐Reconditioning ☐Horizontal Well ☐Destruction ☐ (Describe destruction materials and procedures in Item 12)

(4) PROPOSED USE:

Domestic ☐Irrigation ☐Industrial ☐Test Well ☐Stock ☐Municipal ☐Other ☐

WELL LOCATION SKETCH

5) EQUIPMENT:

Rotary ☐ Reverse ☐Table ☐ Air ☐Other ☐ Bucket ☐

(6) GRAVEL PACK:

Yes ☐ No ☐ Size _____

Diameter of bore _____

Packed from _____ to _____

7) CASING INSTALLED:

Steel ☐ Plastic ☐ Concrete ☐

(8) PERFORATIONS:

Type of perforation or size of screen _____

From ft.	To ft.	Dia. in.	Gage or Wall	From ft.	To ft.	Slot size

9) WELL SEAL:

Was surface sanitary seal provided? Yes ☐ No ☐ If yes, to depth _____ ft.Were strata sealed against pollution? Yes ☐ No ☐ Interval _____ ft.

Method of sealing _____

10) WATER LEVELS:

Depth of first water, if known _____ ft.

Standing level after well completion _____ ft.

11) WELL TESTS:

Was well test made? Yes ☐ No ☐ If yes, by whom? _____Type of test Pump ☐ Baller ☐ Air lift ☐

to water at start of test _____ ft. At end of test _____ ft.

No. _____ gal/min after _____ hours Water temperature _____

1. Chemical analysis made? Yes ☐ No ☐ If yes, by whom? _____2. Electric log made? Yes ☐ No ☐ If yes, attach copy to this report

3. _____

IF ADDITIONAL SPACE IS NEEDED. USE NEXT CONSECUTIVELY NUMBERED FORM

1160- 1172 Hard cemented sand & gravel

1172- 1195 Blue clay

1195- 1220 Sand & gravel, streaks of shale

1220- 1282 Blue sandy clay

1282- 1340 Hard shale, streaks of sand & gravel

1340- 1353 Blue clay

1353- 1357 Cemented sand & gravel

1357- 1360 Blue clay

1360- 1517 Cemented sand & gravel, streaks of shale

1517- 1525 White clay

1525- 1630 Blue clay, shale & streaks of sand & gravel

Work started 19 _____ Completed 19 _____

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

Signed _____ (Well Driller)

NAME _____ (Person, firm, or corporation) (Typed or printed)

Address _____

City _____ Zip _____

License No. _____ Date of this report _____

ORIGINAL

File with DWR

STATE OF CALIFORNIA

THE RESOURCES AGENCY

DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

Do not fill in

No. 232071

State Well No. 13/02-34M
Other Well No. 135/2E-34MPermit No. or Date W-2189

(1) OWNER: N

Address

City


(2) LOCATION OF WELL (See instructions):

County Monterey Owner's Well Number 30-262-05

Well address if different from above

Township _____ Range _____ Section _____

Distance from cities, roads, railroads, fences, etc.

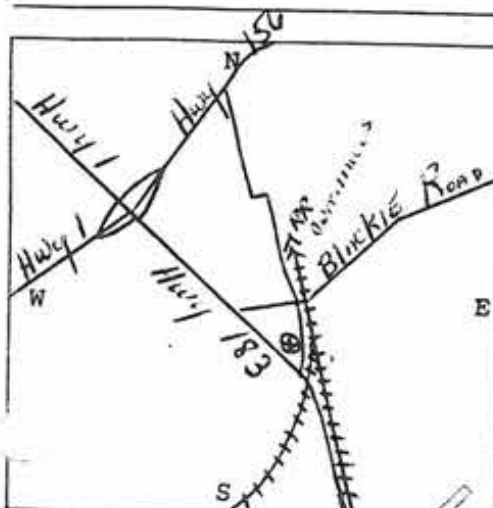Corner of Railroad Ave & Hwy 183

WELL LOCATION SKETCH

(3) TYPE OF WORK:

New Well ☒ Deepening ☐Reconstruction ☐Reconditioning ☐Horizontal Well ☐Destruction ☐ (Describe destruction materials and procedures in Item 12)

(4) PROPOSED USE:

Domestic ☐Irrigation ☐Industrial ☐Test Well ☐Stock ☐Municipal ☐Other ☐(12) WELL LOG: Total depth 645 ft. Depth of completed well 630 ft.
from ft. to ft. Formation (Describe by color, character, size or material)

0 - 5 Clay

5 - 80 Sand

80 - 85 Blue Clay & Shells

85 - 115 Coarse Sand

115 - 175 Coarse Sand & Clay

175 - 325 Coarse Sand

325 - 370 Coarse Sand & Gray Clay

370 - 490 Gravel

490 - 505 Gravel & Clay

505 - 535 Brown Clay

535 - 565 Gravel

565 - 580 Clay

580 - 595 Sand

595 - 625 Sand, Gravel & Clay

625 - 645 Sand & Clay

- Test Hole Portion Continued

645 - 655 Sand

655 - 670 Blue Clay & Coarse Sand

670 - 685 Clay & Gravel

685 - 715 Brown Clay

715 - 735 Gravel & Clay

735 - 760 Brown Clay

760 - 880 Blue Clay & Gravel

880 - 910 Blue Clay & Sand

910 - 955 Sandy Clay

955 - 965 Hard Sandstone

965 - 970 Blue Clay & Sand

970 - 985 Brown & Blue Sand

985 - 1000 Brown Clay, Hard Rock & Sand

1000 - 1060 Brown Sandy Clay & Hard Rock

(5) EQUIPMENT:

Rotary ☒Reverse ☒Cable ☐Air ☐Other ☐Bucket ☐

(6) GRAVEL PACK:

Yes ☒ No ☐ Size #8 SandDiameter of bore 28"Packed from 350 to 630 ft.

(7) CASING INSTALLED:

Steel ☒Plastic ☐Concrete ☐

(8) PERFORATIONS:

Stainless Steel Type 304

Type of perforation or size of screen

From ft.	To ft.	Dia. in.	Gage of Wall	From ft.	To ft.	Slot size
0	60	30	.281			
0	370	16	.312	370	450	.50
450	510	16	.312	570	570	.50
570	590	16	.312	590	610	.50
610	630	16	.312			

(9) WELL SEAL:

Was surface sanitary seal provided? Yes ☒ No ☐ If yes, to depth 60 ft.Were struts sealed against pollution? Yes ☒ No ☐ Interval 0-350 ft.Method of sealing Pumped Grout Seal

(10) WATER LEVELS:

Depth of first water, if known _____ ft.

Standing level after well completion _____ ft.

(11) WELL TESTS:

Was well test made? Yes ☒ No ☐ If yes, by whom? Maggiore BrosType of test Pump ☒ Bailor ☐ Air lift ☐

See Attached Report

Depth to water at start of test _____ ft. At end of test _____ ft.

Rate _____ gal/min after _____ hours Water temperature _____

Chemical analysis made? Yes ☒ No ☐ If yes, by whom? Soil ControlElectric log made? Yes ☒ No ☐ If yes, attach copy to this reportWork started 6-28 1982 Completed 7-9 1982

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

SIGNED [Signature] (Well Driller)NAME Maggiore Bros. Drilling, Inc.

(Person, firm, or corporation) (Typed or printed)

Address 595 Airport BoulevardCity Watsonville, CA Zip 95076License No. C-57-249957 Date of this report Sept. 29, 1982

GEOLOGIC LOG

ORIENTATION () ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)
DRILLING METHOD Hydraulic Mud Rotary FLUID Bentonite Mud

DEPTH FROM SURFACE FL to FL	DESCRIPTION Describe material, grain size, color, etc.
0 90	Dune sand, coarse to very coarse with some finer snads
90 170	Gravelly sand, C to VC sand and gravels
170 190	Clayey VF sand with silt
190 230	Gravelly sand, C to VC sand and gravels
230 270	Sandy clayey silt
270 330	Gravelly sand, C to VC sand and gravels with some silt
330 380	Sandy clayey silt
380 440	Sand, C to VC
440 540	Sands, fine sand with silt and medium to VC sand
540 570	Clayey VF sand with silt
570 630	Partially cemented sands
630 660	Silt
660 680	Granulas of fine cemented sands
680 700	Gravally VC sands
700 900	Silty clays and shales
900 970	Interbedded silts, clays and fine sands
970 1040	Silty clays with shell fragments
1040 1080	Sandy silt
1080 1120	Shale with some clays and shell fragments
1120 1370	Interbedded silts, clays and fine sands
1370 1700	Shales/Clays
1700 1800	Bedded sands, VC to fine sand, some partially cemented
1800 1820	Gravelly, silty clay
1820 1880	Gravels and shale fragments
1880 2000	Shale fragments
2000 core	Very fine sands

TOTAL DEPTH OF BORING 2012 (Feet)
TOTAL DEPTH OF COMPLETED WELL 12x0 (Feet)

WELL OWNER
[REDACTED]

Address 11 Reservation Road
City Marina
County Monterey
APN Book Page Parcel
Township 14S Range 01E Section 24K
Latitude 36 41 57 NORTH Longitude 121 48 28 WEST
DEG. MIN. SEC. DEG. MIN. SEC.

LOCATION SKETCH NORTH

(NOT TO SCALE)

WEST EAST

Marina State Beach

Reservation Rd.

Highway 1

MCWD

vault

well

SOUTH

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

ACTIVITY ()
☒ NEW WELL
MODIFICATION/REPAIR
Deepen
Other (Specify)
DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")
PLANNED USES ()
WATER SUPPLY
Domestic Public
Irrigation Industrial
MONITORING ☒
TEST WELL
CATHODIC PROTECTION
HEAT EXCHANGE
DIRECT PUSH
INJECTION
VAPOR EXTRACTION
SPARGING
REMEDIATION
OTHER (SPECIFY)

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER (FL) BELOW SURFACE
DEPTH OF STATIC WATER LEVEL (FL) & DATE MEASURED
ESTIMATED YIELD * (GPM) & TEST TYPE
TEST LENGTH (Hrs.) TOTAL DRAWDOWN (FL)
* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE		BORE-HOLE DIA. (Inches)	CASING (S)					DEPTH FROM SURFACE		ANNULAR MATERIAL					
			TYPE ($\leq$)				MATERIAL / GRADE			INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	TYPE		
FL	to	FL	BLANK	SCREEN	CON-DUCTOR	FILL PIPE									CE- MENT ($\leq$)
0'	1455'	9.88"												X	RMC#3, coarse aqr.
1455'	1872'	7.88"												X	RMC#3, coarse aqr.
1872'	2012'	4.5"												X	RMC#3, coarse aqr
0	1455		X				PVC		schd 80					X	RMC #3
1455	1872			X			PVC	2"	schd 80	0.020 x 1.2					
1872	2012		X				PVC		schd 80						
All other depths											X				

ATTACHMENTS ()

- ☒ Geologic Log
- ☒ Well Construction Diagram
- ☒ Geophysical Log(s)
- ☒ Soil/Water Chemical Analyses
- ☒ Other On File @ USGS San Diego

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME United States Geological Survey (858) 637-9005
(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

5735 Kearny Villa Rd, Suite O San Diego CA 92123
ADDRESS CITY STATE ZIP

Signed [Signature] DATE SIGNED 6/23/00 C-57 LICENSE NUMBER

14S/01E-24L02

173101E-24L02

SITE I.D.: 3641571214828

COMPLETION DATE: 6/8/2000


STATION NAME: 14S/01E-24K

TOTAL DEPTH: 2012'

USGS SITE: [REDACTED]

WELL FINISH: VAULT

OWNER: [REDACTED]

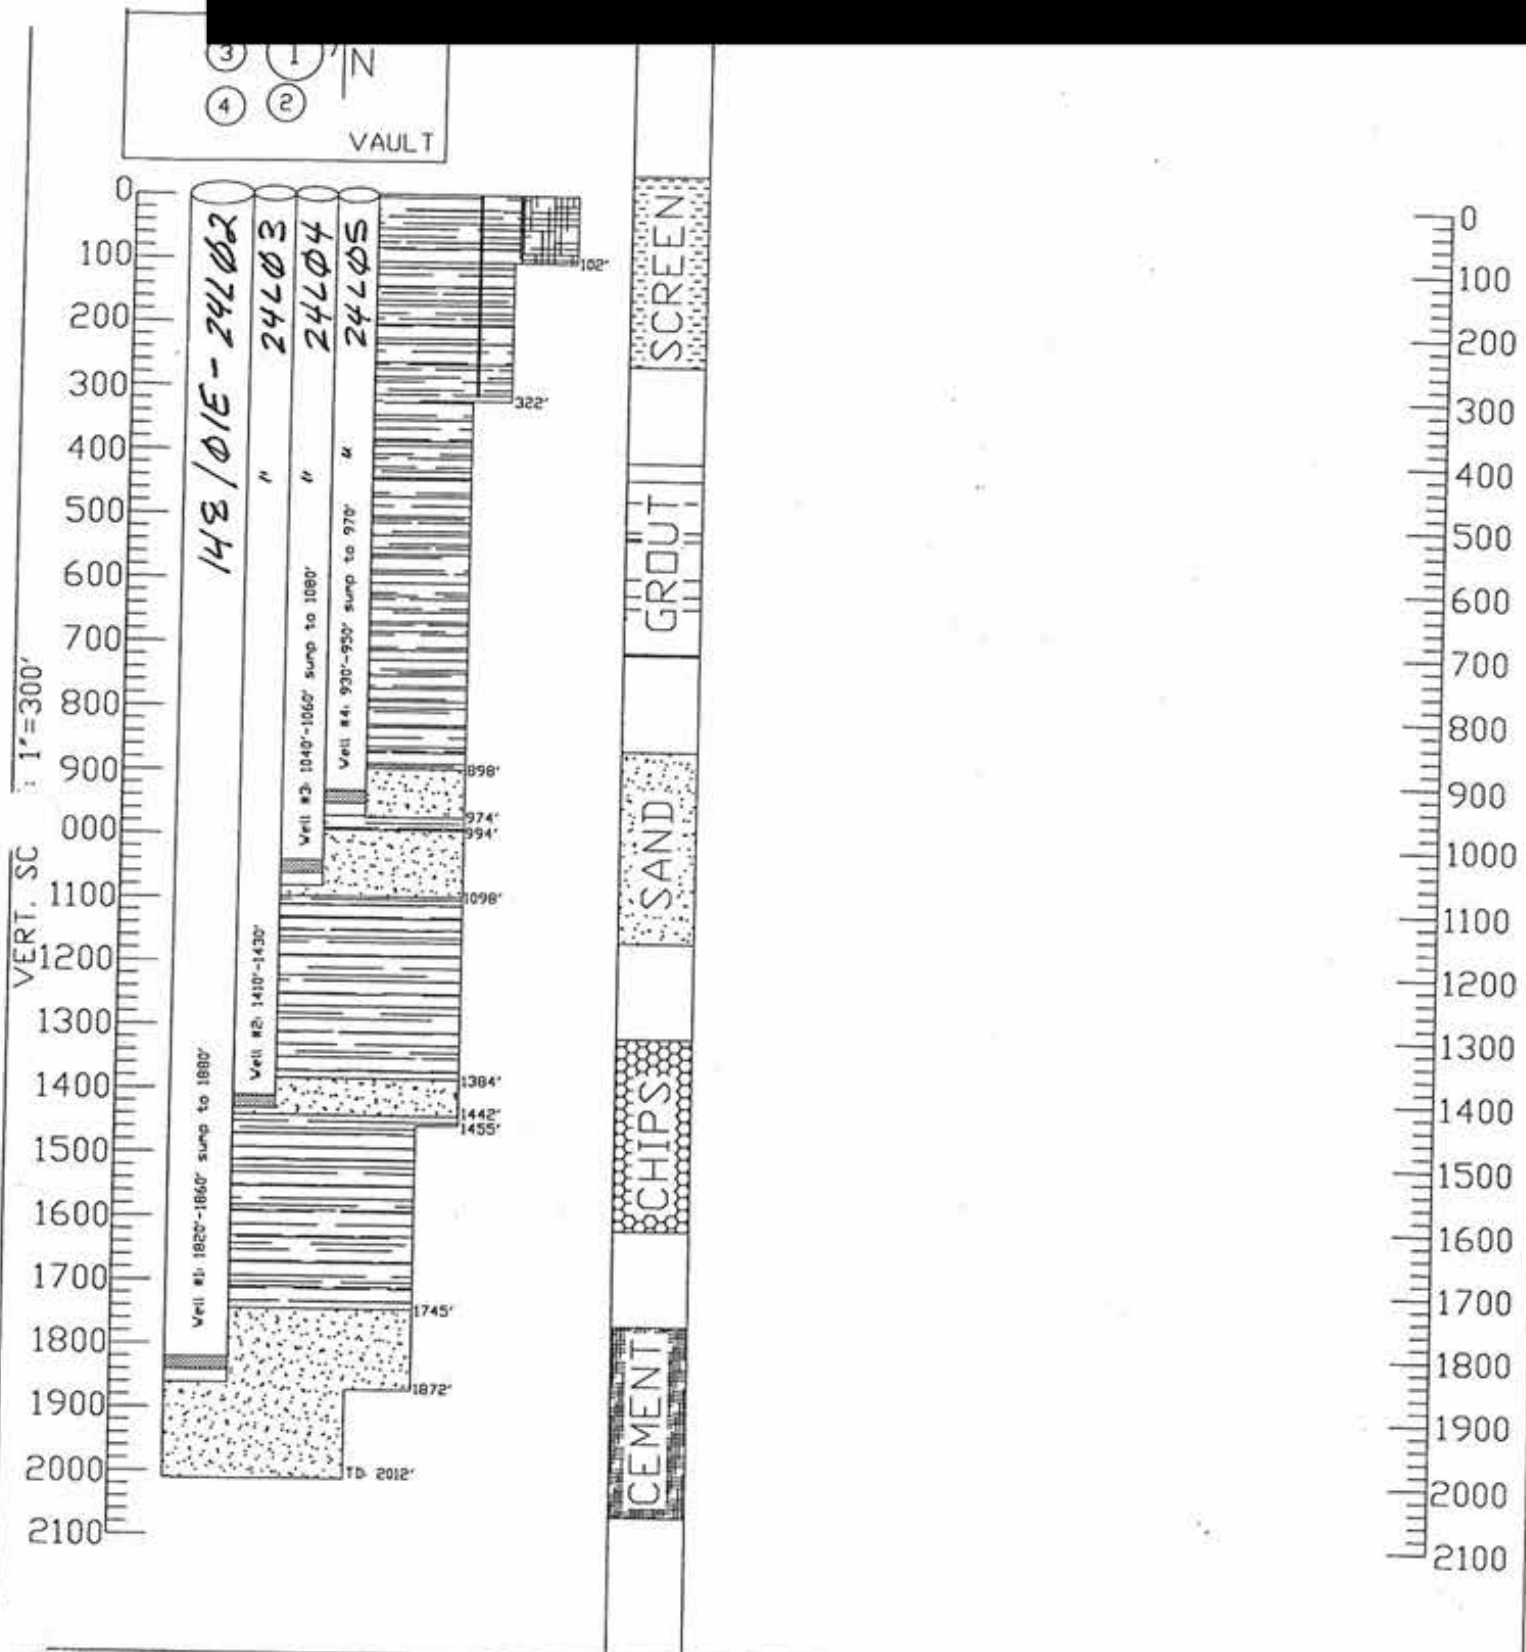

DRILL TYPE: HYDRAULIC MUD ROTARY	DRILLER: USGS WESTERN REGION CREW
CASING TYPE: SCHD. 80 PVC 20' SEC.	SCREEN TYPE: SCHD. 80 1.5"x0.02" SLOTS
GROUT: ENVIROPLUG GROUT 30% SOLIDS	SAND: RMC #3
BOREHOLE DIA: 19 1/2": 0-102'; 13 7/8": 102-322'; 9 7/8": 322-1455'; 7 7/8": 1455-1872'; 4 1/2": 1872-2012'	

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

Page 2 of 4

Owner's Well No. [REDACTED]

No. **767052**

Date Work Began **4/26/00**

Ended **6/8/00**

Local Permit Agency **Monterey County Dept. of Health Salinas CA**

Permit No. **00-055**

Permit Date **03-08-00**

DWR USE ONLY - DO NOT FILL IN

14S/01E-24L03

STATE WELL NO./STATION NO.

LATITUDE LONGITUDE

14S/01E-24L03

APN/TRS/OTHER

GEOLOGIC LOG

ORIENTATION () ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DRILLING METHOD **Hydraulic Mud Rotary** FLUID **Bentonite Mud**

DEPTH FROM SURFACE	DESCRIPTION	
Ft. to Ft.	Describe material, grain size, color, etc.	
0	90	Dune sand, coarse to very coarse with some finer snads
90	170	Gravelly sand, C to VC sand and gravels
170	190	Clayey VF sand with silt
190	230	Gravelly sand, C to VC sand and gravels
230	270	Sandy clayey silt
270	330	Gravelly sand, C to VC sand and gravels with some silt
330	380	Sandy clayey silt
380	440	Sand, C to VC
440	540	Sands, fine sand with silt and medium to VC sand
540	570	Clayey VF sand with silt
570	630	Partially cemented sands
630	660	Silt
660	680	Granulas of fine cemented sands
680	700	Gravally VC sands
700	900	Silty clays and shales
900	970	Interbedded silts, clays and fine sands
970	1040	Silty clays with shell fragments
1040	1080	Sandy silt
1080	1120	Shale with some clays and shell fragments
1120	1370	Interbedded silts, clays and fine sands
1370	1700	Shales/Clays
1700	1800	Bedded sands, VC to fine sand, some partially cemented
1800	1820	Gravelly, silty clay
1820	1880	Gravels and shale fragments
1880	2000	Shale fragments
2000	core	Very fine sands

TOTAL DEPTH OF BORING **2012** (Feet)

TOTAL DEPTH OF COMPLETED WELL **1420** (Feet)

WELL OWNER

Address **11 Reservation Road**

City **Marina**

County **Monterey**

APN Book **14S** Page **01E** Parcel **24K**

Township **36** Range **41** Section **57**

Latitude **36 41 57** NORTH Longitude **121 48 28** WEST

LOCATION SKETCH

(NOT TO SCALE)

ACTIVITY ()

☒ NEW WELL

☐ MODIFICATION/REPAIR

☐ Deepen

☐ Other (Specify)

☐ DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES ()

☐ WATER SUPPLY

☐ Domestic ☐ Public

☐ Irrigation ☐ Industrial

☒ MONITORING

☐ TEST WELL

☐ CATHODIC PROTECTION

☐ HEAT EXCHANGE

☐ DIRECT PUSH

☐ INJECTION

☐ VAPOR EXTRACTION

☐ SPARGING

☐ REMEDIATION

☐ OTHER (SPECIFY)

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER (Ft.) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL (Ft.) & DATE MEASURED

ESTIMATED YIELD * (GPM) & TEST TYPE

TEST LENGTH (Hrs.) TOTAL DRAWDOWN (Ft.)

* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE		BORE-HOLE DIA. (Inches)	CASING (S)						DEPTH FROM SURFACE	ANNULAR MATERIAL						
			TYPE ()				MATERIAL / GRADE	INTERNAL DIAMETER (Inches)		GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	TYPE				
FL	to FL		BLANK	SCREEN	CON- DUCTOR FILL PIPE									FL	to FL	CE- MENT ()
0'	1455'	9.88"													X	RMC#3, coarse aqr.
1455'	1872'	7.88"													X	RMC#3, coarse aqr.
1872'	2012'	4.5"													X	RMC#3, coarse aqr.
0	1410			X			PVC		schd 80						X	RMC #3
1410	1420			X			PVC	2"	schd 80	0.020 x 1.2						
				X			PVC		schd 80				X			

DEPTH FROM SURFACE		ANNULAR MATERIAL			
		TYPE			
FL	to FL	CE- MENT ()	BEN- TONITE ()	FILL ()	FILTER PACK (TYPE/SIZE)
2012'	1745'			X	RMC#3, coarse aqr.
1442'	1384'			X	RMC#3, coarse aqr.
1098'	994'			X	RMC#3, coarse aqr.
974'	898'			X	RMC #3
All other depths			X		

ATTACHMENTS ()

☒ Geologic Log

☒ Well Construction Diagram

☒ Geophysical Log(s)

☒ Soil/Water Chemical Analyses

☒ Other **On File @ USGS San Diego**

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME **United States Geological Survey (858) 637-9005**

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

5735 Kearny Villa Rd, Suite O

San Diego CA 92123

ADDRESS CITY STATE ZIP

Signed **[Signature]** DATE SIGNED **6/23/00**

WELL DRILLER/AUTHORIZED REPRESENTATIVE C-57 LICENSE NUMBER

14S/01E-24L03

14S/01E-24L03

SITE I.D.: 3641571214828

COMPLETION DATE: 6/8/2000


STATION NAME: 14S/01E-24K

TOTAL DEPTH: 2012'

USGS SITE: [REDACTED]

WELL FINISH: VAULT

OWNER: [REDACTED]

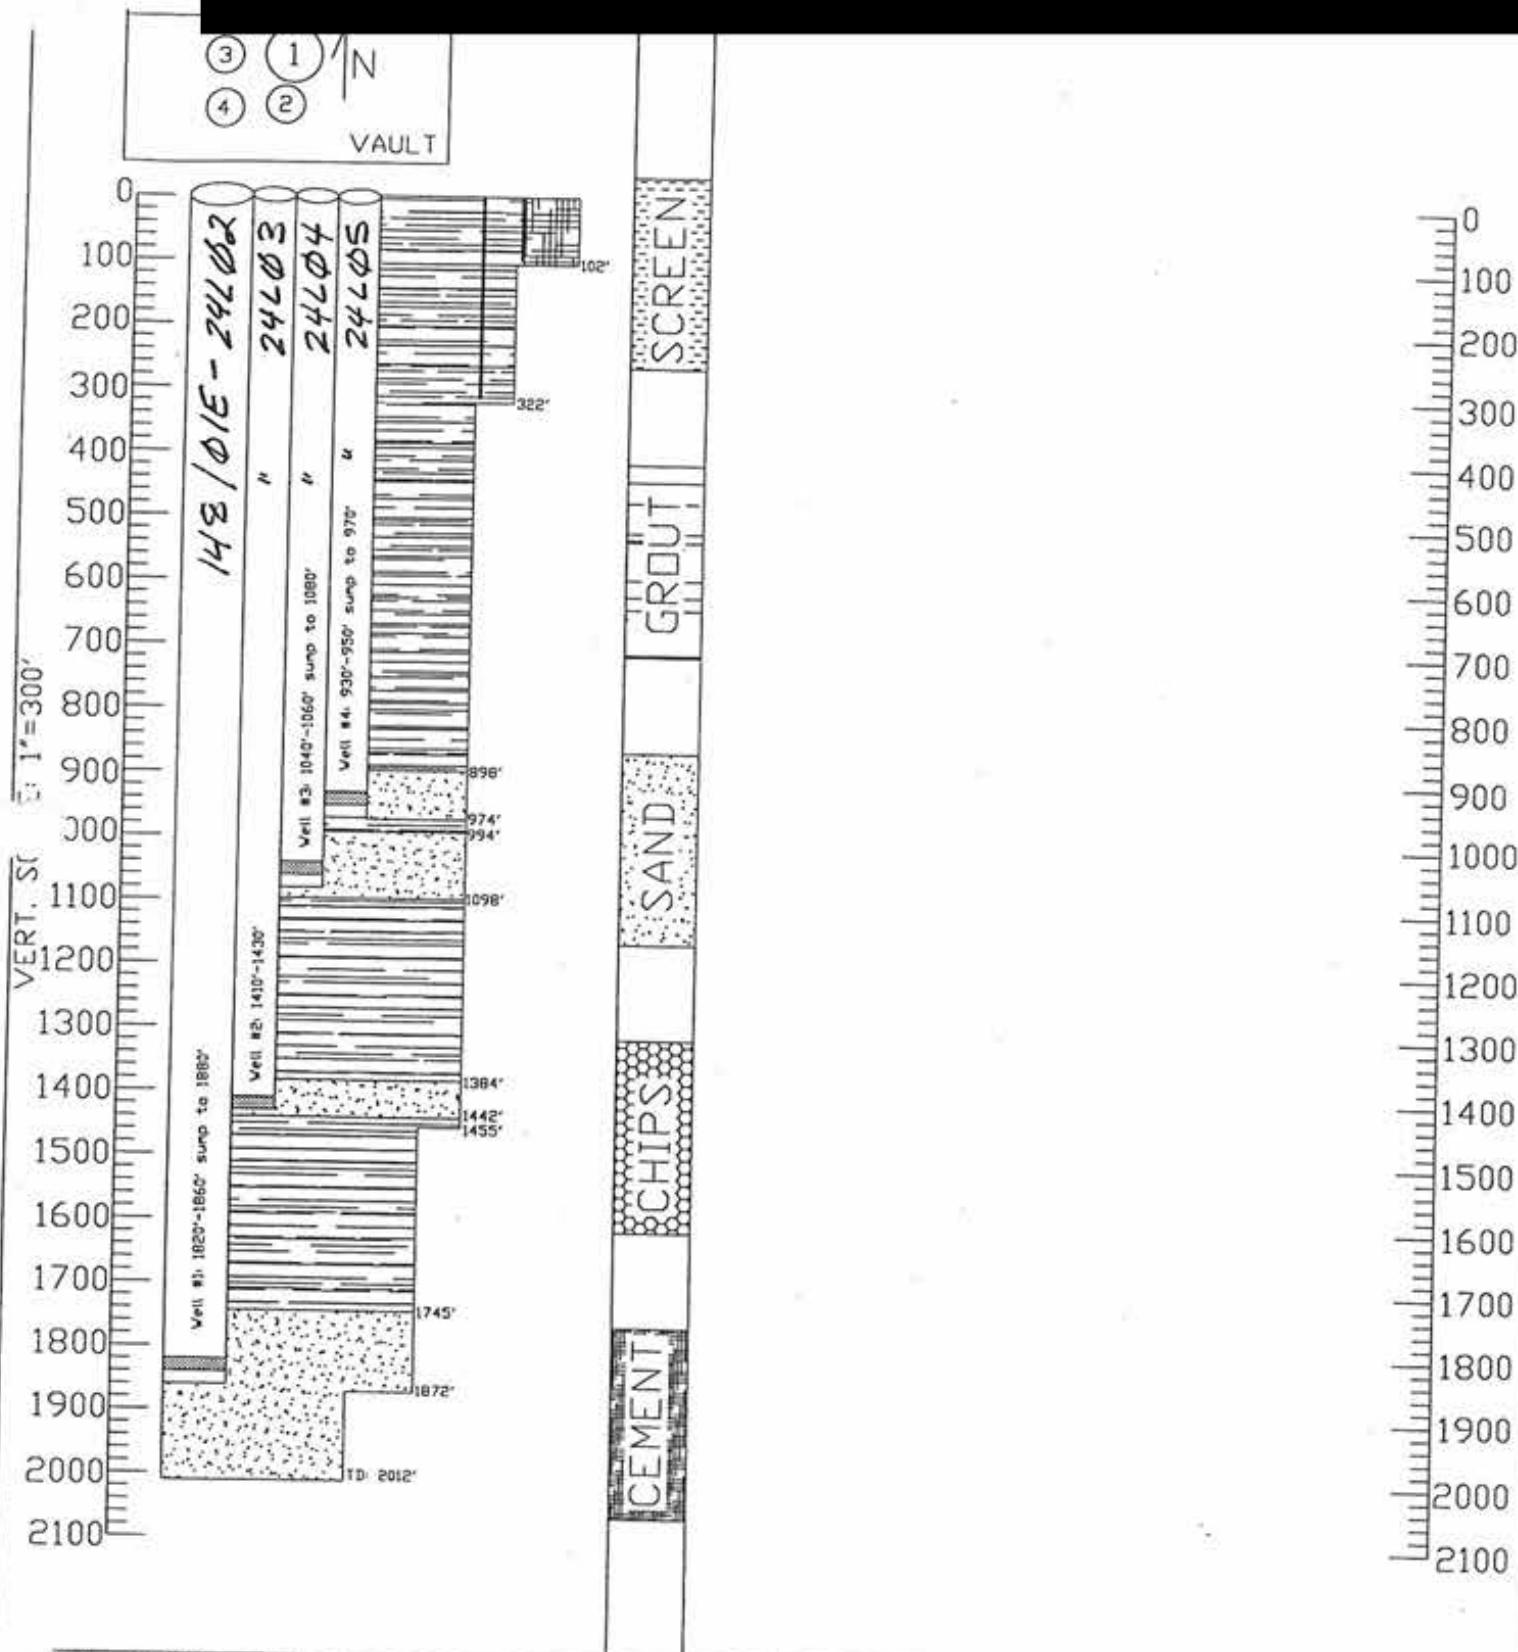

DRILL TYPE: HYDRAULIC MUD ROTARY	DRILLER: USGS WESTERN REGION CREW
CASING TYPE: SCHD. 80 PVC 20' SEC.	SCREEN TYPE: SCHD. 80 1.5"x0.02" SLOTS
GROUT: ENVIROPLUG GROUT 30% SOLIDS	SAND: RMC #3
BOREHOLE DIA: 19 1/2": 0-102'; 13 7/8": 102-322'; 9 7/8": 322-1455'; 7 7/8": 1455-1872'; 4 1/2": 1872-2012'	

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

Page 4 of 4

Owner's Well No.

Date Work Began 4/26/00

Ended 6/8/00

No. **767053**

Local Permit Agency Monterey County Dept. of Health Salinas CA

Permit No. 00-055

Permit Date 03-08-00

DWR USE ONLY - DO NOT FILL IN

14S/01E-2440
STATE WELL NO./STATION NO.

LATITUDE LONGITUDE

14S/01E-24404
APN/TRS/OTHER

14S/01E-24404

GEOLOGIC LOG

ORIENTATION () ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)
DRILLING METHOD Hydraulic Mud Rotary FLUID Bentonite Mud

DEPTH FROM SURFACE Fl. to Fl.	DESCRIPTION Describe material, grain size, color, etc.
0 90	Dune sand, coarse to very coarse with some finer snads
90 170	Gravelly sand, C to VC sand and gravels
170 190	Clayey VF sand with silt
190 230	Gravelly sand, C to VC sand and gravels
230 270	Sandy clayey silt
270 330	Gravelly sand, C to VC sand and gravels with some silt
330 380	Sandy clayey silt
380 440	Sand, C to VC
440 540	Sands, fine sand with silt and medium to VC sand
540 570	Clayey VF sand with silt
570 630	Partially cemented sands
630 660	Silt
660 680	Granulas of fine cemented sands
680 700	Gravally VC sands
700 900	Silty clays and shales
900 970	Interbedded silts, clays and fine sands
970 1040	Silty clays with shell fragments
1040 1080	Sandy silt
1080 1120	Shale with some clays and shell fragments
1120 1370	Interbedded silts, clays and fine sands
1370 1700	Shales/Clays
1700 1800	Bedded sands, VC to fine sand, some partially cemented
1800 1820	Gravelly, silty clay
1820 1880	Gravels and shale fragments
1880 2000	Shale fragments
2000 core	Very fine sands

WELL LOCATION STATE

Address 11 Reservation Road
City Marina
County Monterey
APN Book Page Parcel
Township 14S Range 01E Section 24K
Latitude 36 41 57 NORTH Longitude 121 48 28 WEST

LOCATION SKETCH NORTH

(NOT TO SCALE)

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER (Fl.) BELOW SURFACE
DEPTH OF STATIC WATER LEVEL (Fl.) & DATE MEASURED
ESTIMATED YIELD * (GPM) & TEST TYPE
TEST LENGTH (Hrs.) TOTAL DRAWDOWN (Fl.)
* May not be representative of a well's long-term yield.

ACTIVITY () -
☒ NEW WELL
MODIFICATION/REPAIR
— Deepen
— Other (Specify)
DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")
PLANNED USES ()
— Domestic — Public
— Irrigation — Industrial
MONITORING ☒
TEST WELL
CATHODIC PROTECTION
HEAT EXCHANGE
DIRECT PUSH
INJECTION
VAPOR EXTRACTION
SPARGING
REMEDICATION
OTHER (SPECIFY)

TOTAL DEPTH OF BORING 2012 (Feet)
TOTAL DEPTH OF COMPLETED WELL 1040 (Feet)

DEPTH FROM SURFACE Fl. to Fl.		BORE-HOLE DIA. (Inches)	CASING (S)						DEPTH FROM SURFACE Fl. to Fl.	ANNULAR MATERIAL TYPE				
			BLANK	SCREEN	CON- DUCTOR	FILL PIPE	MATERIAL / GRADE	INTERNAL DIAMETER (Inches)		GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	CE- MENT ($\leq$)	BEN- TONITE ($\leq$)	FILL ($\leq$)
0'	1455'	9.88"												
1455'	1872'	7.88"												
1872'	2012'	4.5"												
0	1040													
1040	1060		X			PVC		schd 80					X	RMC#3, coarse aqr.
1060	1080			X		PVC	2"	schd 80	0.020 x 1.2				X	RMC#3, coarse aqr.
1080	1100		X			PVC		schd 80					X	RMC#3, coarse aqr.
											X			RMC #3
ATTACHMENTS ($\leq$)										CERTIFICATION STATEMENT				

ATTACHMENTS ()

- ☒ Geologic Log
- ☒ Well Construction Diagram
- ☒ Geophysical Log(s)
- ☒ Soil/Water Chemical Analyses
- ☒ Other On File @ USGS San Diego

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME United States Geological Survey (858) 637-9005
(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

Address 5735 Kearny Villa Rd, Suite O San Diego CA 92123
CITY STATE ZIP

Signed DATE SIGNED 6/23/00
WELL DRILLER/AUTHORIZED REPRESENTATIVE

SITE I.D.: 3641571214828

COMPLETION DATE: 6/8/2000


STATION NAME: 14S/01E-24K

TOTAL DEPTH: 2012'

USGS SITE: [REDACTED]

WELL FINISH: VAULT

OWNER: [REDACTED]

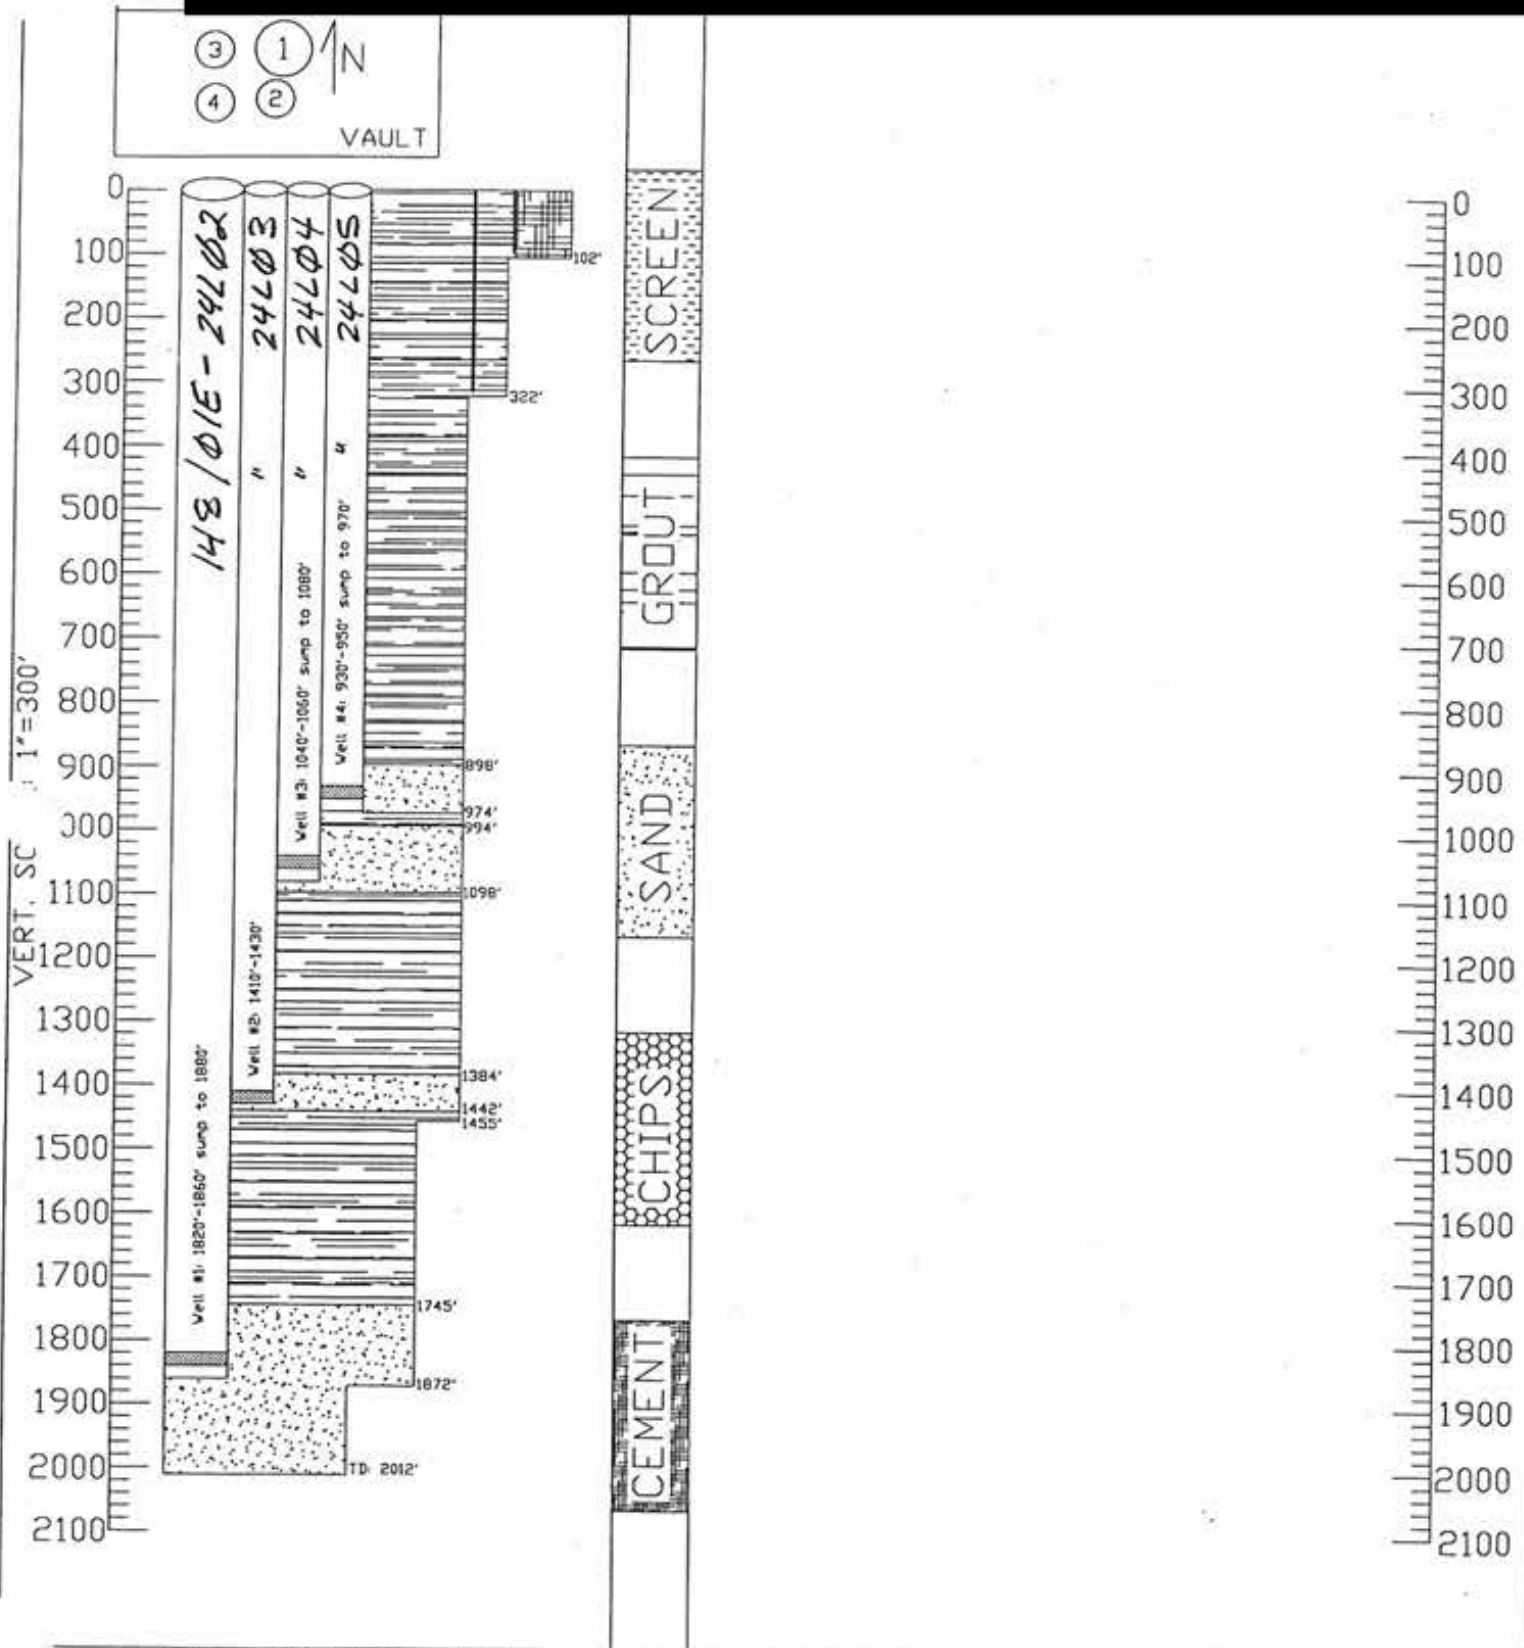

DRILL TYPE: HYDRAULIC MUD ROTARY

DRILLER: USGS WESTERN REGION CREW

CASING TYPE: SCHED. 80 PVC 20' SEC.

SCREEN TYPE: SCHED. 80 1.5"x0.02" SLOTS

GROUT: ENVIROPLUG GROUT 30% SOLIDS

SAND: RMC #3

BOREHOLE DIA: 19 1/2": 0-102'; 13 7/8": 102-322'; 9 7/8": 322-1455'; 7 7/8": 1455-1872'; 4 1/2": 1872-2012'

DWR USE ONLY - DO NOT FILL IN

14S/01E-24L05

STATE WELL NO./STATION NO.

LATITUDE LONGITUDE

14S/01E-24L05

APN/TRS/OTHER

GEOLOGIC LOG

ORIENTATION () ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DRILLING METHOD Hydraulic Mud Rotary FLUID Bentonite Mud

DEPTH FROM SURFACE

FL	to	FL	DESCRIPTION
0	90		Dune sand, coarse to very coarse with some finer snads
90	170		Gravelly sand, C to VC sand and gravels
170	190		Clayey VF sand with silt
190	230		Gravelly sand, C to VC sand and gravels
230	270		Sandy clayey silt
270	330		Gravelly sand, C to VC sand and gravels with some silt
330	380		Sandy clayey silt
380	440		Sand, C to VC
440	540		Sands, fine sand with silt and medium to VC sand
540	570		Clayey VF sand with silt
570	630		Partially cemented sands
630	660		Silt
660	680		Granulas of fine cemented sands
680	700		Gravally VC sands
700	900		Silty clays and shales
900	970		Interbedded silts, clays and fine sands
970	1040		Silty clays with shell fragments
1040	1080		Sandy silt
1080	1120		Shale with some clays and shell fragments
1120	1370		Interbedded silts, clays and fine sands
1370	1700		Shales/Clays
1700	1800		Bedded sands, VC to fine sand, some partially cemented
1800	1820		Gravelly, silty clay
1820	1880		Gravels and shale fragments
1880	2000		Shale fragments
2000	core		Very fine sands

TOTAL DEPTH OF BORING 2012 (Feet)

TOTAL DEPTH OF COMPLETED WELL 470 (Feet)

WELL LOCATION

Address 11 Reservation Road

City Marina

County Monterey

APN Book 14S Page 01E Parcel 24K

Township 36 Range 41 Section 57

Latitude 36 41 57 NORTH Longitude 121 48 28 WEST

DEG. MIN. SEC. DEG. MIN. SEC.

LOCATION SKETCH

(NOT TO SCALE)

ACTIVITY ()

☒ NEW WELL

MODIFICATION/REPAIR

☐ Deepen

☐ Other (Specify)

DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES ()

WATER SUPPLY

☐ Domestic ☐ Public

☐ Irrigation ☐ Industrial

MONITORING

☒ TEST WELL

CATHODIC PROTECTION

☐ HEAT EXCHANGE

☐ DIRECT PUSH

☐ INJECTION

☐ VAPOR EXTRACTION

☐ SPARGING

☐ REMEDIATION

☐ OTHER (SPECIFY)

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER (FL) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL (FL) & DATE MEASURED

ESTIMATED YIELD * (GPM) & TEST TYPE

TEST LENGTH (Hrs.) TOTAL DRAWDOWN (FL)

* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE	BORE-HOLE DIA. (Inches)	CASING (S)					
		TYPE ()				MATERIAL / GRADE	INTERNAL DIAMETER (Inches)
FL	to	FL	BLANK	SCREEN	CONDUIT		
0'	1455'	9.88"					
1455'	1872'	7.88"					
1872'	2012'	4.5"					
0	1450		X			PVC	schd 80
1450	1750			X		PVC	2"
1750	470		X			PVC	schd 80

DEPTH FROM SURFACE	ANNULAR MATERIAL			
	TYPE			
FL	to	FL	CE-MENT ()	BEN-TONITE ()
2012'	1745'			
1442'	1384'			
1098'	994'			
974'	898'			
All other depths				

ATTACHMENTS ()

☒ Geologic Log

☒ Well Construction Diagram

☒ Geophysical Log(s)

☒ Soil/Water Chemical Analyses

☒ Other On File @ USGS San Diego

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME United States Geological Survey (858) 637-9005

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

5735 Kearny Villa Rd, Suite O San Diego CA 92123

ADDRESS CITY STATE ZIP

Signed [Signature] DATE SIGNED 6/23/00

WELL DRILLER/AUTHORIZED REPRESENTATIVE C-57 LICENSE NUMBER

SITE I.D.: 3641571214828

148 / 01E - 24L05

COMPLETION DATE: 6/8/2001


STATION NAME: 14S/01E-24K

TOTAL DEPTH: 2012'

USGS SITE: MCWD-1

WELL FINISH: VAULT

OWNER: Monterey County Water Resources Agency Marina Coast Water District

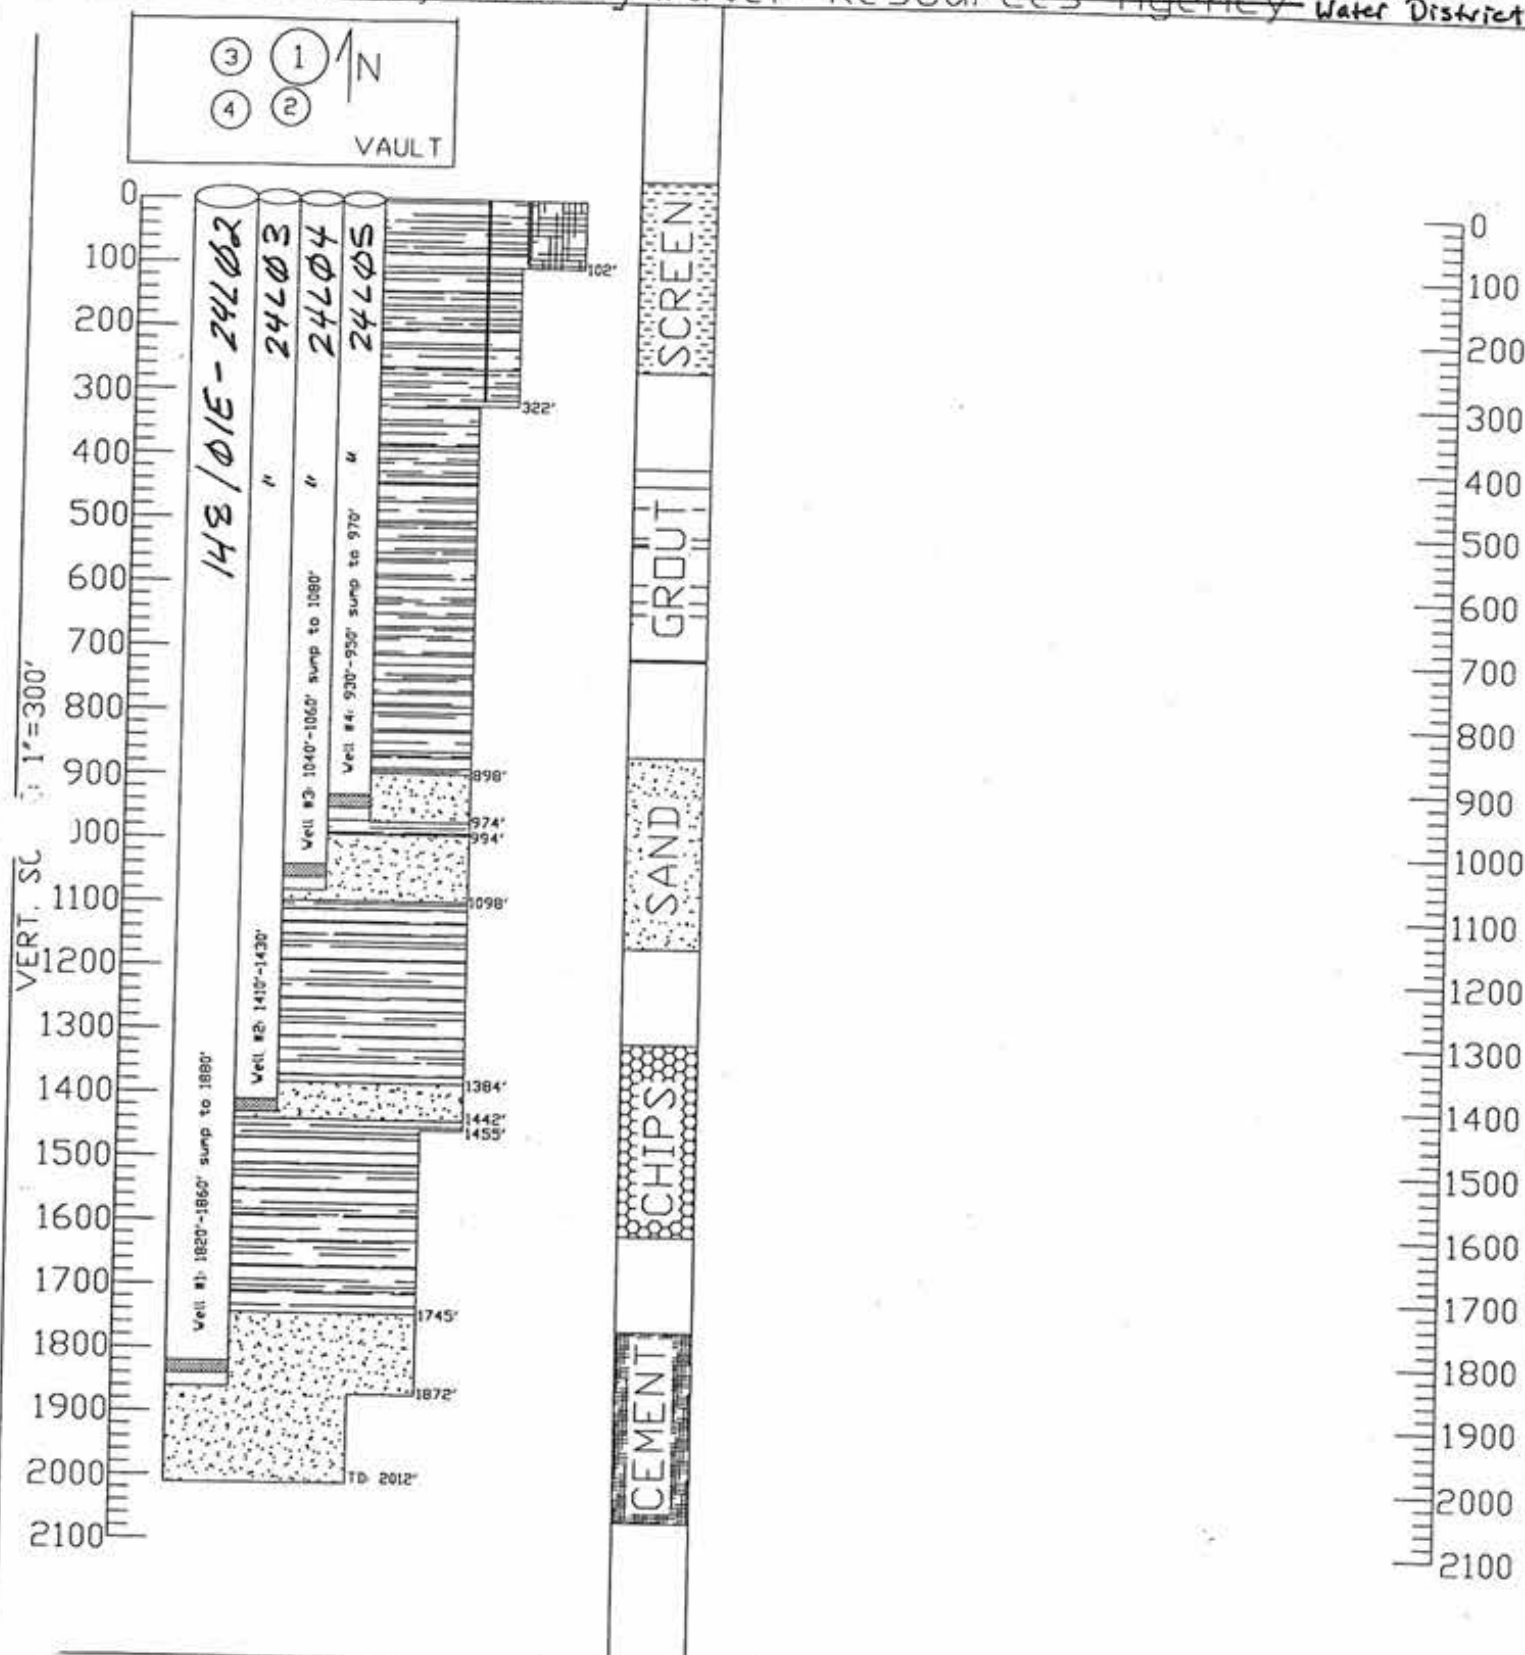

DRILL TYPE: HYDRAULIC MUD ROTARY	DRILLER: USGS WESTERN REGION CREW
CASING TYPE: SCHD. 80 PVC 20' SEC.	SCREEN TYPE: SCHD. 80 1.5"x0.02" SLOTS
GROUT: ENVIROPLUG GROUT 30% SOLIDS	SAND: RMC #3
BOREHOLE DIA: 19 1/2": 0-102'; 13 7/8": 102-322'; 9 7/8": 322-1455'; 7 7/8": 1455-1872'; 4 1/2": 1872-2012'	

STATE OF CALIFORNIA
THE RESOURCES AGENCY
DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

Do Not Fill In

No 141763

State Well No. 145 ZE-661

Other Well No. P-960

(1) OWNER:

(11) WELL LOG:

Total depth 1809 ft. Depth of completed well 1560 ft.

Formation: Describe by color, character, size of material, and structure

0 ft. to 6 Top Soil ft.

(2) LOCATION OF WELL:

County Monterey Owner's number, if any

Township, Range, and Section Mulligan Hill

Distance from cities, roads, railroads, etc. See attached map

(3) TYPE OF WORK (check):

New Well ☒ Deepening ☐ Reconditioning ☐ Destroying ☐

If destruction, describe material and procedure in Item 11.

(4) PROPOSED USE (check):

Domestic ☐ Industrial ☐ Municipal ☐

Irrigation ☐ Test Well ☐ Other ☒

(5) EQUIPMENT:

Rotary ☒

Cable ☐

Other ☐

(6) CASING INSTALLED:

STEEL: OTHER:

SINGLE ☒ DOUBLE ☐

If gravel packed

From ft.	To ft.	Diam.	Gage or Wall	Diameter of Bore	From ft.	To ft.
0	600	16	3/8	28-1/2	0	600
600	603	16	2	26	600	603
603	1563	12	3/8	26	603	1563

Size of shoe or well ring:

Describe joint:

Weld

Size of gravel:

Spec sand

(7) PERFORATIONS OR SCREEN:

Type of perforation or name of screen

From ft.	To ft.	Perf. per row	Rows per ft.	Size in. x in.
860	1540			3/32 Horiz.
				Lowvre Full Flo

(8) CONSTRUCTION:

Was a surface sanitary seal provided? Yes ☒ No ☐ To what depth 800 ft.

Were any strata sealed against pollution? Yes ☒ No ☐ If yes, note depth of strata

From ft. to ft.

From ft. to ft.

Method of sealing Concrete and 30" steel conductor

(9) WATER LEVELS:

Depth at which water was first found, if known 100 ft.

Standing level before perforating, if known ft.

Standing level after perforating and developing ft.

(10) WELL TESTS:

Was pump test made? Yes ☐ No ☐ If yes, by whom?

2100 gal./min. with ft. drawdown after hrs.

Temperature of water Was a chemical analysis made? Yes ☐ No ☐

Was electric log made of well? Yes ☒ No ☐ If yes, attach copy

6' - 15' Blue sandy clay
15' - 32' Fine blue sand
32' - 60' Blue clay w/sea shell
60' - 75' Blue soft sand
75' - 100' Blue clay
100' - 184' Blue clay & sand streak
184' - 278' Coarse sand & gravel
278' - 300' Yellow Clay
300' - 330' Blue clay
330' - 360' Coarse yellow sand, streak of clay
360' - 434' Yellow clay, streaks blue & brown shale
434' - 440' Yellow clay, streaks blue & brown shale
440' - 490' White coarse sand
490' - 528' Blue clay
528' - 590' Sand & gravel, streak clay
590' - 610' Yellow Clay
610' - 621' Sand & gravel
621' - 715' Yellow clay w/streak of sand
715' - 747' Yellow clay w/streak gravel
747' - 778' Yellow clay w/streak gravel
778' - 795' yellow clay w/streak gravel blue clay
795' - 840' Yellow clay w/streak gravel blue clay
840' - 872' Blue clay
872' - 903' Blue clay
903' - 934' Brown clay
934' - 965' Hard brown clay & shale
965' - 997' Hard brown clay & shale
997' - 1028' Hard brown clay & shale
1028' - 1059' Blue clay
1059' - 1090' Blue & brown clay

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

NAME Salinas Pump Co.
(Person, firm or corporation) (Typed or printed)

Address 1128 Madison Lane
Salinas, Ca. 93901


[SIGNED] *Arthur Thornton*
(Well Driller)

License No. 273053 Dated 19

SKETCH LOCATION OF WELL ON REVERSE SIDE


OVER
CONTINUED ON BACK

145/ZE-6L

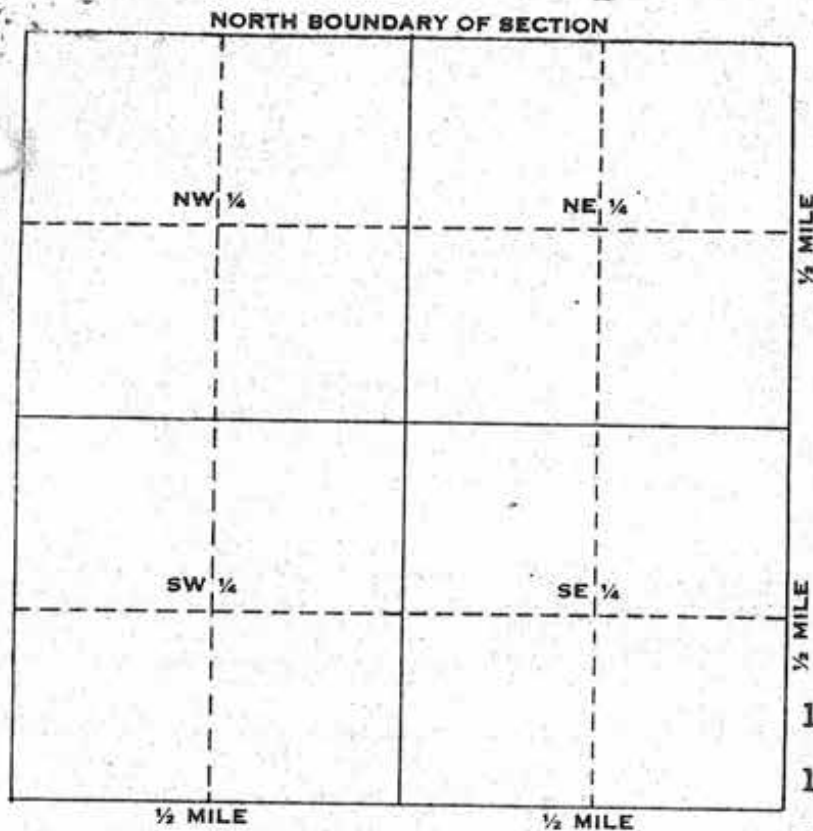Township 14 N/SRange 2 E/WSection No. 621

A. Location of well in sectionized areas.
Sketch roads, railroads, streams, or other features as necessary.

1090'	-	1122'	Blue & brown shaley clay
1122'	-	1153'	Blue & brown shaley clay
1153'	-	1184'	Blue shaley clay with streak hard sandstone
1184'	-	1247'	Blue shale streak sand
1247'	-	1300'	Blue clay, streak sand
1300'	-	1340'	Blue clay streak sand
1340'	-	1372'	blue clay & shale
1372'	-	1403'	Blue clay, strk gravel & sand
1403'	-	1435'	Strk gravel & sand
1435'	-	1466'	Strk gravel & sand
1466'	-	1498'	Strk gravel & sand
1498'	-	1529'	Strk gravel & sand
1529'	-	1561'	Strk gravel & sand 1540'
1561'	-	1592'	Strk gravel & sand
1592'	-	1600'	Strk gravel & sand
1600'	-	1630'	EX Blue clay
1630'	-	1645'	Blue clay & sand
1645'	-	1660'	Brown clay & Blue clay
1660'	-	1675'	Shale, blue clay
1675'	-	1690'	Shale, blue clay
1690'	-	1705'	Brown clay, blue clay
1705'	-	1720'	Brown clay, sand streak
1720'	-	1735'	Blue clay
1735'	-	1750'	Blue clay
1750'	-	1809'	Blue shale

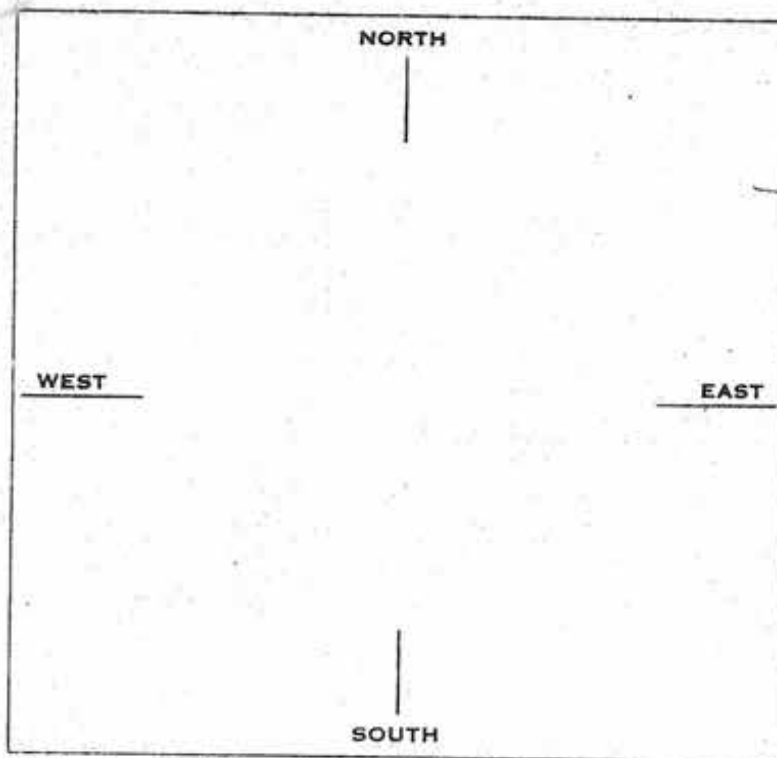

B. Location of well in areas not sectionized.
Sketch roads, railroads, streams, or other features as necessary.
Indicate distances.

8317243228

F.C. #22755

MAGGIORA BROS

PAGE 02

STATE OF CALIFORNIA
WELL COMPLETION REPORT

STATE OF CALIFORNIA
COMPLETION F
Refer to Instruction Pamphlet

No. 0911505

Owner's Well No. 11155-1

Date Work Began 1/17/2005 Ended 5/11/2005

Local Permit Agency MONTEREY CO. ENV. HEALTH DEPT

Permit No. 04-09527

Permit Date 12/8/2004

GEOLOGIC LOG

WELL OWNER

PRESSURE-DEEP

ORIENTATION (°)			X	VERTICAL	HORIZONTAL	ANGLE	(SPECIFY)
DEPTH FROM SURFACE			DRILLING METHOD	MUD	ROTARY	FLUID	WATER SUPPLY
			DESCRIPTION				
			Describe material, grain size, color, etc.				
0	0	0.5	ASPHALT & BASE ROCK				
0.5	0	20	BRN SAND				
20	0	90	BRN. SANDY CLAY				
60	0	210	SAND & GRAVEL				
210	0	240	GRAVEL				
240	0	270	GRAY CLAY & GRAVEL				
270	0	300	GRAY CLAY				
300	0	390	SANDY CLAY & GRAVEL				
390	0	420	SAND & GRAVEL				
420	0	430	SAND				
430	0	510	SAND & GRAVEL				
510	0	570	SANDY CLAY				
570	0	630	SAND				
630	0	800	SAND & GRAVEL				
800	0	840	SANDY CLAY				
840	0	900	CLAY				
900	0	930	SANDY CLAY				
930	0	1020	CLAY				
1020	0	1200	CLAY & GRAVEL				
1200	0	1290	SAND & CLAY				
1290	0	1380	CLAY				
1380	0	1410	SANDY CLAY				
1410	0	1440	CLAY				
1440	0	1595	SAND & CLAY				

CITY _____ STATE _____ ZIP _____

WELL LOCATION
Address 315 NEPOKSET ROAD

CITY MARINA

County MONTEREY

APN Book 229 Page 011 Parcel GOS

Township _____ Range _____ Section _____

Lat _____ N Long _____ W

DEC MIN SEC

LOCATION SKETCH NORTH

WEST EAST

SOUTH

Illustrate or Describe Distance of Well from Roads, Buildings, Purses, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

ACTIVITY (✓)
☒ NEW WELL
☐ MODIFICATION/REPAIR
 ☐ Deepen
 ☐ Other (Specify) _____
☐ DESTROY (Describe Procedure and Materials Under "GEOLOGIC LOG")

USES (✓)
WATER SUPPLY
 ☐ Domestic ☒ Public
 ☐ Irrigation ☒ Industrial

MONITORING _____
TEST WELL _____
CATHODIC PROTECTION _____
HEAT EXCHANGE _____
DIRECT PUSH _____
INJECTION _____
VAPOR EXTRACTION _____
SPARGING _____
REMEDIATION _____
OTHER (SPECIFY) _____

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER _____ (Ft.) BELOW SURFACE
DEPTH OF STATIC WATER LEVEL 25.5 (Ft.) & DATE MEASURED 05-11-05
ESTIMATED YIELD * 700 (GPM) & TEST TYPE PUMP
TEST LENGTH 4 (Hrs.) TOTAL DRAWDOWN 11.2 (Ft.)
* May not be representative of a well's long-term yield

* May not be representative of a well's long-term yield.

[illegible]

ATTACHMENTS (2)

- ☐ Geologic Log
- ☒ Well Construction Diagram
- ☐ Geophysical Log(s)
- ☐ Soil/Water Chemical Analyses
- ☐ Other

ATTACH ADDITIONAL INFORMATION IF IT EXISTS

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME MAGGICRA BROS. DRILLING INC

(PERSON, FIRM, OR CORPORATION) TYPED OR PRINTED

595 AIRPORT BLVD WATSONVILLE, CA 95076

NOISE-EXPOSURE



James C. Ketchum

CITY

SAT

Fig. 1

Don't forget to fill out the contract too

0

المجلة

06/27/2005 09:06 8317243228

MAGGIORA BROS

PAGE 02

QUADRUPPLICATE
For Local RequirementsSTATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction PamphletPage 1 of 1Owner's Well No. 41155-1No. **0911505**Date Work Began 1/17/2005 Ended 5/11/2005Local Permit Agency MONTEREY CO. ENV. HEALTH DEPT.Permit No. 04-09527Permit Date 12/8/2004

DWR USE ONLY - DO NOT FILL IN

1.415/0121E1-0171J031

STATE WELL REGISTRATION NO.

LATITUDE LONGITUDE

1.415/0121E1-0171J031

APN/RS/OTHER

WELL OWNER PRESSURE-DEEP

GEOLOGIC LOGORIENTATION () ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)
DRILLING METHOD MUD ROTARY FLUID WATER/BRINEDEPTH FROM SURFACE
Fe. to Fe.

Fe.	to	Fe.	DESCRIPTION
0	0.5		ASPHALT & BASE ROCK
0.5	20		BRN SAND
20	80		BRN SANDY CLAY
80	210		SAND & GRAVEL
210	240		GRAVEL
240	270		GRAY CLAY & GRAVEL
270	300		GRAY CLAY
300	390		SANDY CLAY & GRAVEL
390	420		SAND & GRAVEL
420	430		SAND
430	510		SAND & GRAVEL
510	570		SANDY CLAY
570	630		SAND
630	860		SAND & GRAVEL
860	840		SANDY CLAY
840	800		CLAY
800	930		SANDY CLAY
930	1020		CLAY
1020	1200		CLAY & GRAVEL
1200	1290		SAND & CLAY
1290	1380		CLAY
1380	1410		SANDY CLAY
1410	1440		CLAY
1440	1595		SAND & CLAY

TOTAL DEPTH OF BORING 1585 (Feet)TOTAL DEPTH OF COMPLETED WELL 1573 (Feet)

WELL LOCATION

Address 315 NEPOMSETT ROAD

City MONTEREY

County MONTEREY

APN Book 229 Page 011 Parcel 005

Township 4 Range 1 Section 1

Lat. 36 DEG. 50 MIN. 00 SEC. N Long. 120 DEG. 50 MIN. 00 SEC. W

LOCATION SKETCH

NORTH

WEST

SOUTH

Diagram or Describe Distance of Well from Roads, Buildings, Fences, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

ACTIVITY ()

☒ NEW WELL

MODIFICATION/REPAIR

☐ Enlarge

☐ Other (Specify)

DESTROY (Describe Procedure and Materials Under GEOLOGIC LOG)

USES ()

WATER SUPPLY

☐ Domestic ☒ Public

☐ Irrigation ☒ Industrial

MONITORING

TEST WELL

CATHODIC PROTECTION

HEAT EXCHANGE

DIRECT PUSH

INJECTION

VAPOR EXTRACTION

SPARGING

REMEDIATION

OTHER (SPECIFY)

WATER LEVEL & YIELD OF COMPLETED WELLDEPTH TO FIRST WATER 25.5 (Fe.) BELOW SURFACEDEPTH OF STATIO WATER LEVEL 25.5 (Fe.) & DATE MEASURED 05-11-05ESTIMATED YIELD 700 (GPM) & TEST TYPE PUMPTEST LENGTH 4 (Hrs.) TOTAL DRAWDOWN 132.2

* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE		BORE-HOLE DIA. (Inches)	CASING (S)								
			TYPE (S)				MATERIAL GRADE	INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	
Fe.	to	Fe.	BLANK	SCREEN	COIL DUCTOR	FILL TYPE					
SEE ATTACHED											

DEPTH FROM SURFACE		ANNULAR MATERIAL				
		TYPE				
Fe.	to	Fe.	CE- MENT (S)	BEN- TONITE (S)	FILL (S)	FILTER PACK (TYPE/SIZE)
0	1380		XX			10 mesh
1380	1595				XX	5 / 16

ATTACHMENTS ()

- ☐ Geologic Log
- ☒ Well Construction Diagram
- ☐ Geophysical Log(s)
- ☐ Soil/Water Chemical Analyses
- ☐ Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME MAGGIORA BROS. DRILLING, INC.

(PERSON, FIRM, OR CORPORATION) (TYPE OR PRINTED)

595 AIRPORT BLVD. WATSONVILLE, CA 95076

ADDRESS

CITY

STATE

ZIP

Signed

James J. Port

DATE SIGNED

6-14-05

C-37 LICENSE NUMBER

249057

Copy to KR 6-28-05

05/23/2005 16:01 8317243228


MAGGIORA BROS

145/2E-07543
PAGE 02
002

03/14/05 14:05 FAX 408-53 2543

Geoconsultants

PROPOSED WELL CONSTRUCTION DIAGRAM [REDACTED] MONTEREY COUNTY, CALIFORNIA

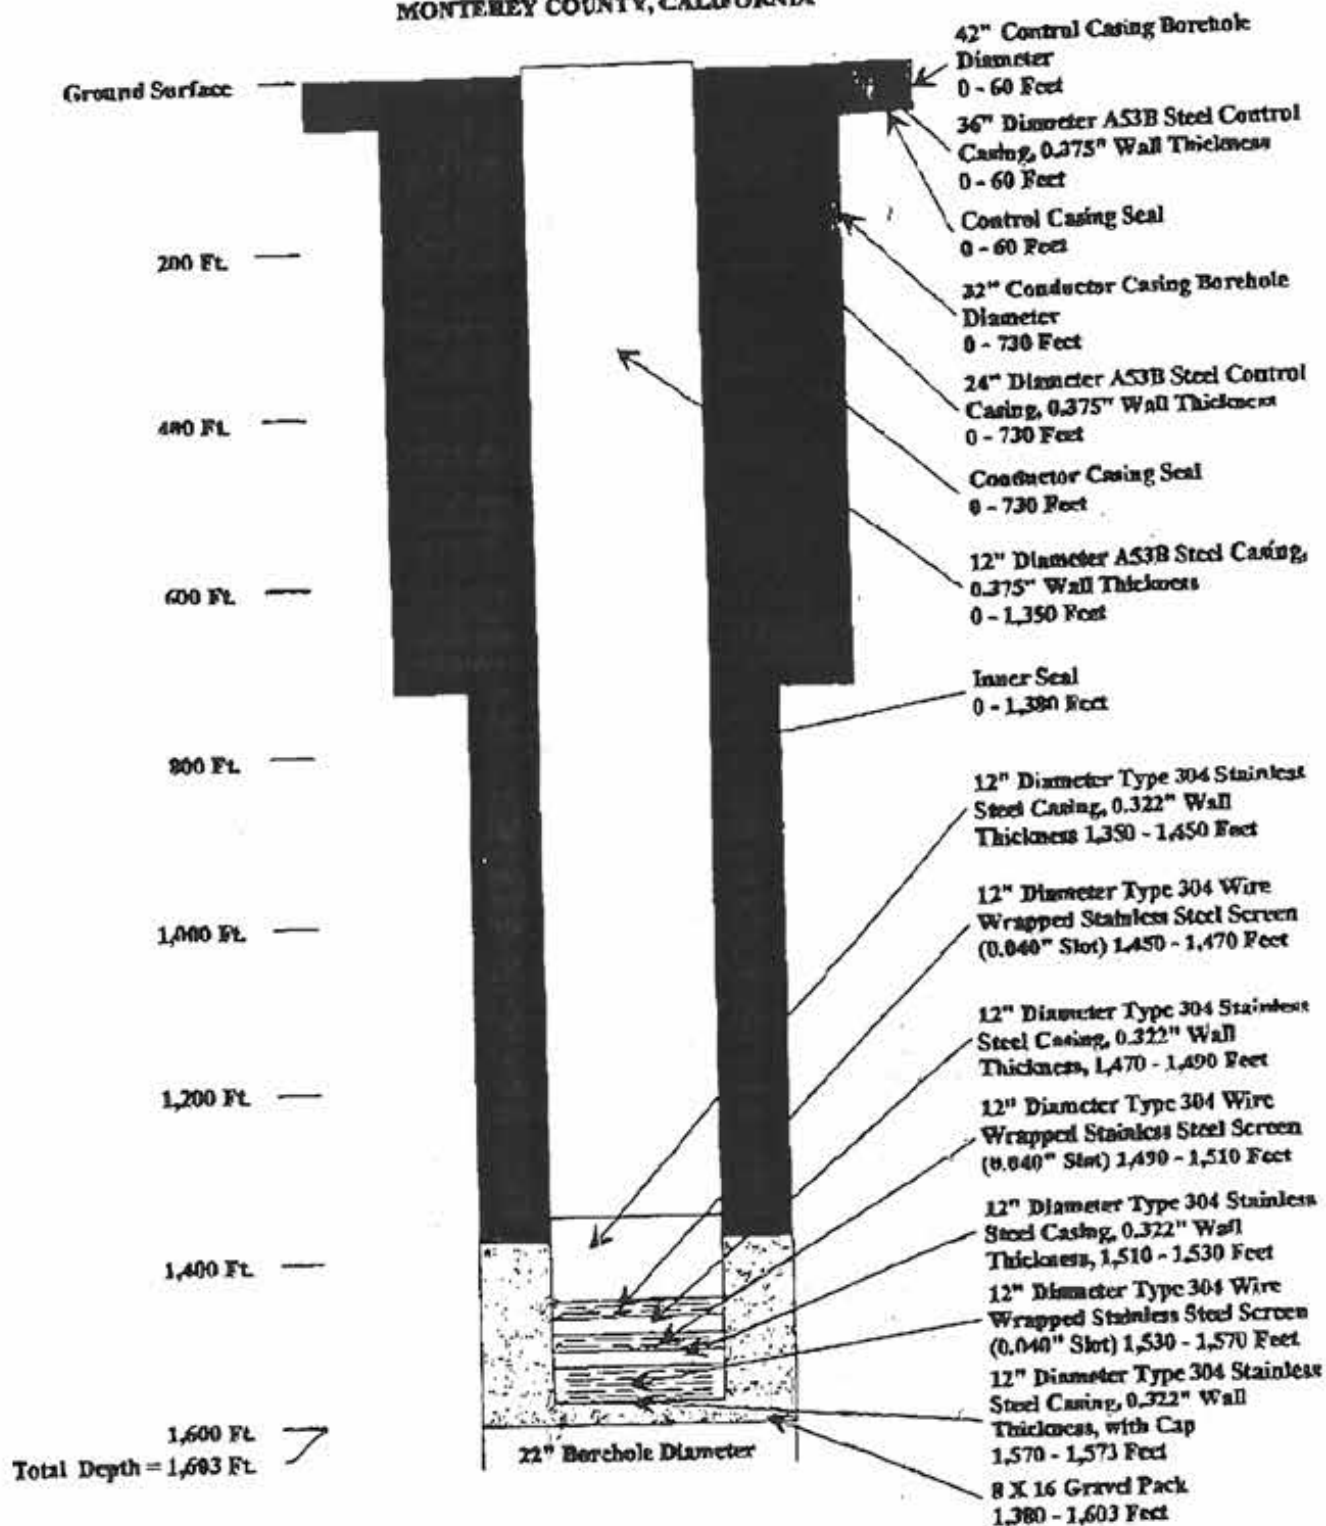

GEOCONSULTANTS, INC.
 G1431-01A 03/05 FIGURE 1

14/2-18E1

ORIGINAL

File with DWR

STATE OF CALIFORNIA
THE RESOURCES AGENCY

DEPARTMENT OF WATER RESOURCES
WATER CODE Sec. 13 WATER WELL DRILLERS REPORT

Do Not Fill In

No 121665

State Well No. 145/2E-18E1

Other Well No.

(2) LOCATION OF WELL:

County Monterey Owner's number, if any
Township, Range, and Section Between Marina & Castroville
Distance from cities, roads, railroads, etc. off Lapis Road

(3) TYPE OF WORK (check):

New Well ☒ Deepening ☐ Reconditioning ☐ Destroying ☐

If destruction, describe material and procedure in Item 11.

(4) PROPOSED USE (check):

Domestic ☐ Industrial ☐ Municipal ☐
Irrigation ☒ Test Well ☐ Other ☐

(5) EQUIPMENT:

Rotary ☒
Cable ☐
Other ☐

(6) CASING INSTALLED:

STEEL: OTHER:
SINGLE ☒ DOUBLE ☐

If gravel packed

From ft.	To ft.	Diam.	Gage or Wall	Diameter of Bore	From ft.	To ft.
303	306	14"	1/4"	26	300	370
306	870	12"	1/4"			

Size of shoe or well ring:

Size of gravel: 1/4 pea

Describe joint: welded

(7) PERFORATIONS OR SCREEN:

Type of perforation or name of screen

From ft.	To ft.	Perf. per row	Rows per ft.	Size in. x in.
656	834	8	4 1/2	1/8" std louvre

(8) CONSTRUCTION:

Was a surface sanitary seal provided? Yes ☒ No ☐ To what depth: 300 ft.

Were any strata sealed against pollution? Yes ☒ No ☐ If yes, note depth of strata

From 0 ft. to 300 ft.

From ft. to ft.

Method of sealing: concrete

(9) WATER LEVELS:

Depth at which water was first found, if known ft.

Standing level before perforating, if known ft.

Standing level after perforating and developing ft.

(10) WELL TESTS: to be tested

Is pump test made? Yes ☐ No ☒ If yes, by whom?

Yield: gal./min. with ft. drawdown after hrs.

Temperature of water Was a chemical analysis made? Yes ☐ No ☒

Was electric log made of well? Yes ☐ No ☐ If yes, attach copy

(11) WELL LOG:

Total depth	ft.	Depth of completed well	ft.
0	75	870	
Formation: Describe by color, character, size of material, and structure			
0	75	100'	fine sand
75	100		coarse gravel
100	125		gravel-streaks clay
125	150		clay rock
150	175		coarse gravel
175	200		fine sand streak clay
200	225		fine sand streak clay
225	250		gravel
250	275		fine sand - streak clay
275	300		white sand
300	325		sand-clay streaks
325	350		sand
350	375		fine sand
375	400		sand gravel
400	425		sand gravel
425	450		sand streaks clay
450	475		coarse gravel-clay
475	500		sand clay
500	525		sand clay
525	550		sandy clay
550	575		fine sand clay
575	600		sand
600	625		Red clay gravel
625	650		yellow clay
650	675		yellow clay
675	700		fine gravel
700	725		coarse gravel
725	750		coarse gravel
750	775		fine gravel
775	800		coarse gravel
800	825		coarse gravel
825	850		yellow clay
850	875		yellow clay
875	900		yellow clay

Work started 7-2-74 19 Completed 7-5-74 19

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

NAME Salinas Pump Co.,

(Person, firm, or corporation) (Typed or printed)
Address 1128 Madison Lane, Salinas, Ca. 93901

[SIGNED] *Salinas Pump Co.*
(Well Driller)

License No. 273053 Dated 7-5-74 19

SKETCH LOCATION OF WELL ON REVERSE SIDE

DUPLICATE

Driller's Copy

Page 1 of 2

Owner's Well No. 701471

Date Work Began 06/18/97

Local Permit Agency

Permit No. 97-067

Permit Date 04/07/97

GEOLOGIC LOG

STATE OF CALIFORNIA

WELL COMPLETION REPORT

Refer to Instruction Pamphlet

No.

419777

DWR USE ONLY - DO NOT FILL IN

145/02E-20B03

STATE WELL NO./STATION NO.

LATITUDE

LONGITUDE

145/02E-20T50

APN/TRS/OTHER

WELL OWNER PRESSURE-DEEP

ORIENTATION () VERTICAL HORIZONTAL ANGLE (SPECIFY)

DEPTH TO FIRST WATER (Ft.) BELOW SURFACE

DEPTH FROM SURFACE

DESCRIPTION

Describe material, grain size, color, etc.

Ft.	to	Ft.	DESCRIPTION
0	3		TOP SOIL
3	60		CLEAN HOLE
60	90		SAND
90	100		SANDY CLAY AND CLAY
100	120		BLUE CLAY AND SANDY CLAY
120	155		CLAY
155	160		SANDY CLAY AND SAND
160	180		SAND AND GRAVEL
180	200		SAND
200	220		CLAY
220	230		CLAY AND SAND
230	240		SAND AND GRAVEL
240	245		SAND
245	255		CLAY
255	260		SAND
260	280		SAND AND LITTLE CLAY
280	345		SAND AND GRAVEL
345	360		CLAY
360	380		CLAY AND SAND
380	400		BROWN AND BLUE CLAY
400	480		CLAY
480	520		CLAY AND SANDY CLAY
520	540		CLAY AND GRAVEL
540	560		CLAY AND SAND
560	562		SAND
562	600		SANDY CLAY
600	640		CLAY AND FINE SANDY CLAY
640	655		CLAY
655	660		SAND

TOTAL DEPTH OF BORING 840 (Feet)

TOTAL DEPTH OF COMPLETED WELL 825 (Feet)

CITY WELL LOCATION STATE ZIP

Address 14811 DEL MONTE AVE.

City MONTEREY

County MONTEREY

APN Book 175 Page 011 Parcel 041

Township Range Section

Latitude Longitude


DEG. MIN. SEC.

DEG. MIN. SEC.

LOCATION SKETCH

NORTH

SEE ATTACHED

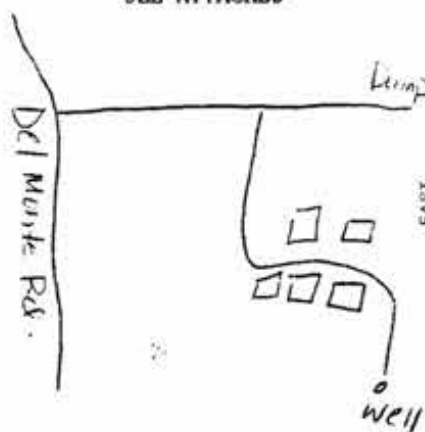

SOUTH

Illustrate or Describe Distance of Well from Landmarks such as Roads, Buildings, Fences, Rivers, etc. PLEASE BE ACCURATE & COMPLETE.

ACTIVITY ()

NEW WELL

MODIFICATION/REPAIR

Deepen

Other (Spec)

DESTROY (Describe Procedures and Methods Under "GEOLOGIC")

PLANNED USE ()

MONITORING

WATER SUPPLY

Domestic

Public

Irrigation

Industrial

"TEST WELL"

CATHODIC PROTECTION

OTHER (Spec)

DRILLING METHOD REVERSE ROTARY FLUID WATER

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH OF STATIC WATER LEVEL 152.25 (Ft.) & DATE MEASURED 08/18/97

ESTIMATED YIELD 250 (GPM) & TEST TYPE PUMP

TEST LENGTH (Hrs) TOTAL DRAWDOWN 19.3 (Ft.)

* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE			BORE-HOLE DIA. (Inches)	CASING(S)						DEPTH FROM SURFACE			ANNULAR MATERIAL				
				TYPE ($\angle$)				MATERIAL / GRADE	INTERNAL DIAMETER (Inches)				GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	TYPE		
Ft.	to	Ft.		BLANK	SCREEN	COR. ENCL. FULL PIPE	CE- MENT ($\angle$)			BEN- TONITE ($\angle$)	FILL ($\angle$)	FILTER PAC (TYPE/SIZE)					
0	50	32			X	STEEL	.250		STAINLESS .040	0	650	XX					
0	670	22	X			STEEL	.250		STAINLESS	650	840			XX	8X16		
670	730	22	X			STEEL	.250		STAINLESS .040								
730	785	22	X			STEEL	.250		STAINLESS								
785	805	22		X		STEEL	.250		STAINLESS .040								
805	825	22	X			STEEL	.250		STAINLESS								

ATTACHMENTS ()

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analyses
- Other

ATTACH ADDITIONAL INFORMATION IF IT EXISTS

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME MAGGIORA BROS. DRILLING, INC.

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

595 AIRPORT BLVD. WATSONVILLE, CA 95076

ADDRESS

CITY

11/14/97

STATE

ZIP 95076

Signed

WELL DRILLER/AUTHORIZED REPRESENTATIVE

DATE SIGNED

C/S LICENSE NUMBER

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

Owner's Well No. 701471
Date Work Began 06/18/97, Ended 06/26/97
Local Permit Agency MONTEREY COUNTY DEPARTMENT OF HEALTH
Permit No. WSAI 97-067 Permit Date 04/07/97
No. 419779
GEOLOGIC LOG

DWR USE ONLY - DO NOT FILL IN
STATE WELL NO./STATION NO. 145/02E-20T50
LATITUDE 145/02E LONGITUDE 20T50
APN/TRS/OTHER 145/02E-20T50
WELL OWNER PRESSURE-DEEP

ORIENTATION () VERTICAL HORIZONTAL ANGLE (SPECIFY)

DEPTH FROM SURFACE			DESCRIPTION <i>Describe material, grain size, color, etc.</i>
Ft.	to	Ft.	
660	680		COARSE SAND AND GRAVEL
680	700		COARSE SAND
700	715		HARD SAND
715	720		SAND AND GRAVEL
720	730		SAND AND GRAVEL
730	740		CLAY
740	780		HARD CLAY
780	785		CLAY
785	790		SAND AND GRAVEL
790	800		HARD SAND
800	840		CLAY

CITY WELL LOCATION STATE ZIP

Address 14811 DEL MONTE AVE.
City MONTEREY
County MONTEREY
APN Book 175 Page 011 Parcel 041
Township Range Section
Latitude NORTH Longitude

LOCATION SKETCH NORTH
SEE ATTACHED

ACTIVITY ()
☒ NEW WELL
MODIFICATION/REPAIR
— Deepen
— Other (Specify)
— DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")
PLANNED USE ()
— MONITORING
WATER SUPPLY
— Domestic
☒ Public
— Irrigation
— Industrial
— "TEST WELL"
— CATHODIC PROTECTION
— OTHER (Specify)

DRILLING METHOD REVERSE ROTARY FLUID WATER
WATER LEVEL & YIELD OF COMPLETED WELL
DEPTH OF STATIC WATER LEVEL 162.25 (Ft.) & DATE MEASURED 08/18/97
ESTIMATED YIELD 250 (GPM) & TEST TYPE 2012
TEST LENGTH 5.5 (Hrs.) TOTAL DRAWDOWN 19.33 (Ft.)
* May not be representative of a well's long-term yield.

TOTAL DEPTH OF BORING 840 (Feet)
TOTAL DEPTH OF COMPLETED WELL 825 (Feet)

DEPTH FROM SURFACE			BORE-HOLE DIA. (Inches)	CASING(S)					DEPTH FROM SURFACE			ANNULAR MATERIAL			
				TYPE ()				MATERIAL / GRADE				INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	TYPE
Ft.	to	Ft.		BLANK	SCREEN	COR. DOCTOR	FILL PIPE		CE- MENT ()	BEN- TONITE ()	FILL ()				FILTER PACK (TYPE/SIZE)
0	50	32					STEEL	250	STAINLESS	040					
0	670	22	X				STEEL	250	STAINLESS						
670	730	22		X			STEEL	250	STAINLESS	040			XX	8X16	
730	785	22	X				STEEL	250	STAINLESS						
785	805	22		X			STEEL	250	STAINLESS	040					
805	825	22	X				STEEL	250	STAINLESS						

ATTACHMENTS ()
— Geologic Log
— Well Construction Diagram
— Geophysical Log(s)
— Soil/Water Chemical Analyses
— Other
ATTACH ADDITIONAL INFORMATION IF IT EXISTS

CERTIFICATION STATEMENT
I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief
NAME MAGGIORA BROS. DRILLING, INC.
(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)
595 AIRPORT BLVD. WATSONVILLE, CA 95076
ADDRESS CITY STATE ZIP
Signed 11/14/97 DATE SIGNED 249957
WELL DRILLER/AUTHORIZED REPRESENTATIVE C57 LICENSE NUMBER

FC 24033
 00095485 145/02E-22A03

The free Adobe Reader may be used to view and complete this form. However, software must be purchased to complete, save and merge a saved form.

File Original with DWR

State of California
Well Completion Report
 Made to National Pumping
 No. 00095485

Page 1 of 2
 Owner's Well Number 90021-1
 Date Work Began 03/19/2009 Date Work Ended 6/23/2009
 Local Permit Agency Monterey County Division of Environmental Health
 Permit Number 09-11577 Permit Date 2/4/09

DWR Use Only - Do Not Fill In

State Well Number/Well Number

Latitude Longitude

APN/Trs/Owner

Geologic Log		
Orientation	☒ Vertical ☐ Horizontal ☐ Angle	Specify
Drilling Method	Flowline Circulation Rotary	
Drilling Fluid	Fresh Water	
Depth from Surface Feet to	Feet	Description Describe material, grain size, color, etc.
0	7	Black clay
7	40	Brn. sand
40	75	Gray clay
75	140	Blue clay
140	180	Sand & gravel
180	240	Sandy clay
240	255	Sand & gravel
255	290	Brn. clay
290	390	Sand & gravel
390	420	Sand
420	460	Tan clay
460	505	Sand & gravel
505	515	Brn. clay
515	520	Fine sand
520	540	Brn. clay
540	545	Fine sand
545	560	Brn. clay
560	570	Tan clay & sand
570	575	Brn. clay
575	585	Sand & gravel
585	595	Brn. clay
595	620	Sand & gravel
620	655	Brn. clay
655	665	Sand
665	675	Brn. clay
675	695	Sand
695	700	Brn. clay
700	705	Sand
705	800	Brn. clay
800	840	Sand & brn. clay
Total Depth of Boring		1664 1664 Feet
Total Depth of Completed Well		1640 1640 Feet

Well Owner

Well Location

Address 53 Cooper Road

City Salinas County Monterey

Latitude Dec. Min. Sec. N Longitude Dec. Min. Sec. W

Datum Decimal Lat. Decimal Long.

APN Book 227 Page 061 Parcel 004

Township Range Section

Location Sketch
 (Sketch must be drawn by hand after each previous)

Activity

☒ New Well
☐ Modification/Repair
☐ Deepen
☐ Other
☐ Destroy
 (Destroy requires permit from State Dept. of Water Resources)

Planned Uses

☒ Water Supply
☐ Domestic ☐ Public
☐ Irrigation ☐ Industrial
☐ Cathodic Protection
☐ Dewatering
☐ Heat Exchange
☐ Injection
☐ Monitoring
☐ Remediation
☐ Sparging
☐ Loss Well
☐ Vapor Extraction
☐ Other

Water Level and Yield of Completed Well

Depth to first water (Feet below surface)

Depth to Static

Water Level 85 (Feet) Date Measured 06/23/2009

Estimated Yield 1,700 (GPM) Test Type Constant Rate

Test Length 8.0 (Hours) Total Drawdown 290 (Feet)

*May not be representative of a well's long term yield

Casing									Annular Material		
Depth from Surface Feet to Feet	Borehole Diameter (Inches)	Type	Material	Wall Thickness (Inches)	Outside Diameter (Inches)	Screen Type	Slot Size # (Inches)	Depth from Surface Feet to Feet	Fill	Description	
0	73	48	Concrete	1/4 Carbon Steel	.375	42		0	73	Cement	10 SACK
0	456	36	Concrete	Low Carbon Steel	.375	28		0	456	Cement	Neat
0	700	26	Blank	Low Carbon Steel	.375	18		0	920	Cement	Neat
700	880	26	Blank	Low Carbon Steel	.375	16		920	1,664	Filter Pack	8 X 16
880	880	26	Blank	304 Stainless Steel	.313	16					
880	1,640	26	Screen	304 Stainless Steel	0.313	16	Wire Mesh	0.040			

Attachments

☐ Geologic Log
☐ Well Construction Diagram
☐ Geophysical Log(s)
☐ Soil/Water Chemical Analyses
☐ Other

Declaration Statement

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

Name Madonna River Drilling, Inc. City Watsonville State CA Zip 95076

Address 395 AIRPORT BLVD

Signed [Signature] Date Signed 07-24-09 License Number 240957

2009 License Number

CAH 148 REV. 9/08

* ADDITIONAL SPACE IS REQUIRED FOR NEXT CONSECUTIVE * IN JUNE 2017 FORM

Owner's Well No. 8083

Date Work Began 6/23/2008, Ended 7/3/2008

Local Permit Agency Monterey County Health Dept

Permit No. 07-11018

Permit Date 4/2/2007

STATE OF CALIFORNIA
WELL COMPLETION REPORT

Refer to Instruction Pamphlet

No. **E0088288**

DWR USE ONLY - DO NOT FILL IN

145/02E-28C102

STATE WELL NO./STATION NO.

LATITUDE LONGITUDE

145/02E-28C102

WELL ARNERS/OTHER

GEOLOGIC LOG

ORIENTATION (✓) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DRILLING METHOD **REVERSE**

FLUID **WATER**

DESCRIPTION

Describe material, grain, size, color, etc.

DEPTH FROM SURFACE

Fl. to Fl.

0	600	Existing 16" casing
600	640	Tan clay with sand
640	680	Sand with small gravel
680	800	Tan clay with sand
800	820	Sand with small gravel
820	980	Tan clay with sand streaks
980	1020	Sand with small gravel
1020	1080	Brittle yellow gray clay with sand
1080	1130	Brittle yellow clay with sand and small gravel
1130	1180	Brittle blue clay with sand
1180	1240	Brittle gray blue clay

FC21676
deepened

TOTAL DEPTH OF BORING 1180 (Feet)
TOTAL DEPTH OF COMPLETED WELL 1160 (Feet)

WELL OWNER

Pressure Reg.

WELL LOCATION

Address .15 Mi W of Salinas River & .9 Mi N of

City **Blanco Road CA**

County **MONTEREY**

APN Book 175 Page 011

Parcel **440-047-000**

Township 14 S Range 2 E Section 28

Latitude

DEG. MIN. SEC.

LOCATION SKETCH

NORTH

DEG. MIN. SEC.

ACTIVITY (✓)

☐ NEW WELL

MODIFICATION/REPAIR

☒ Deepen

☐ Other (Specify)

☐ DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (✓)

WATER SUPPLY

☒ Domestic ☐ Public

☒ Irrigation ☐ Industrial

MONITORING ☐

TEST WELL ☐

CATHODIC PROTECTION ☐

HEAT EXCHANGE ☐

DIRECT PUSH ☐

INJECTION ☐

VAPOR EXTRACTION ☐

SPARGING ☐

REMEDIATION ☐

OTHER (SPECIFY) ☐

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER (Fl.) BELOW SURFACE

DEPTH OF STATIC

WATER LEVEL 60.5 (Fl.) & DATE MEASURED 7/23/2008

ESTIMATED YIELD * 1009 (GPM) & TEST TYPE

TEST LENGTH (Hrs.) TOTAL DRAWDOWN 61.9 (Fl.)

May not be representative of a well's long-term yield.

DEPTH FROM SURFACE	BORE-HOLE DIA. (Inches)	CASING (S)					
		TYPE (✓)			MATERIAL / GRADE	INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS
Fl. to Fl.		BLANK	SCREEN	CON-DUCTOR FILL PIPE			
300 640	16/15.5	✓			ASTM-135	8-5/8	.322
640 720	15.5	✓			Stainless St	8-5/8	
720 750	15.5		✓		Hvy Staines	8-5/8	
750 790	15.5	✓			Stainless St	8-5/8	.050
790 860	15.5		✓		Hvy Staines	8-5/8	.050
860 980	15.5	✓			Stainless St	8-5/8	

DEPTH FROM SURFACE	Fl. to Fl.	ANNULAR MATERIAL			
		TYPE			FILTER PACK (TYPE/SIZE)
		CE-MENT (✓)	BEN-TOHITE (✓)	FILL (✓)	
320 660		✓			Sand Slurry
660 900				✓	SRI#8 Sand
900 940			✓		Bentonite Chips
940 1180				✓	SRI#8 Sand

ATTACHMENTS (✓)

- ☐ Geologic Log
- ☐ Well Construction Diagram
- ☐ Geophysical Log(s)
- ☐ Soil/Water Chemical Analysis
- ☐ Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME **EATON DRILLING CO.**

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

20 WEST KENTUCKY AVE

ADDRESS

WOODLAND

CITY

CA

STATE

95695

ZIP

Signed

Mark D. Deaton

WELL DRILLER/AUTHORIZED REPRESENTATIVE

03/18/09

DATE SIGNED

C57 A HIC - 13378

C-57 LICENSE NUMBER

Copy to WR 3-25-09

Owner's Well No. 8083

Date Work Began 6/23/2008, Ended 7/3/2008

Local Permit Agency Monterey County Health Dept

Permit No. 07-11018

Permit Date 4/2/2007

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

No. **E0088288**

DWR USE ONLY — DO NOT FILL IN

STATE WELL NO./STATION NO.

LATITUDE LONGITUDE

APN/TRS/OTHER

GEOLOGIC LOG

ORIENTATION (✓) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DRILLING METHOD **REVERSE** FLUID **WATER**

DEPTH FROM SURFACE		DESCRIPTION
FL	to FL	Describe material, grain, size, color, etc.
0	600	Existing 16" casing
600	640	Tan clay with sand
640	680	Sand with small gravel
680	800	Tan clay with sand
800	820	Sand with small gravel
820	980	Tan clay with sand streaks
980	1020	Sand with small gravel
1020	1080	Brittle yellow gray clay with sand
1080	1130	Brittle yellow clay with sand and small gravel
1130	1180	Brittle blue clay with sand
1180	1240	Brittle gray blue clay

WELL LOCATION

Address 15 Mi W of Salinas River & 9 Mi N of
City Blanco Road CA
County MONTEREY

APN Book 175 Page 011 Parcel 140
Township 14 S Range 2 E Section 28
Latitude

DEG. MIN. SEC. NORTH

LOCATION SKETCH

WEST EAST

DEG. MIN. SEC. SOUTH

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

WELL OWNER

ACTIVITY (✓)

☐ NEW WELL

MODIFICATION/REPAIR

☒ Deepen

☐ Other (Specify)

DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (✓)

WATER SUPPLY

☐ Domestic ☐ Public

☒ Irrigation ☐ Industrial

☐ MONITORING

☐ TEST WELL

☐ CATHODIC PROTECTION

☐ HEAT EXCHANGE

☐ DIRECT PUSH

☐ INJECTION

☐ VAPOR EXTRACTION

☐ SPARGING

☐ REMEDIATION

☐ OTHER (SPECIFY)

TOTAL DEPTH OF BORING 1180 (Feet)

TOTAL DEPTH OF COMPLETED WELL 1160 (Feet)

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER (FL) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL 60.5 (FL) & DATE MEASURED 7/23/2008

ESTIMATED YIELD 1009 (GPM) & TEST TYPE

TEST LENGTH (Hrs.) TOTAL DRAWDOWN 61.9 (FL)

May not be representative of a well's long-term yield.

DEPTH FROM SURFACE		BORE HOLE DIA. (Inches)	CASING (S)				
FL	to FL		TYPE (✓)		MATERIAL / GRADE	INTERNAL DIAMETER (Inches)	SLOT SIZE IF ANY (Inches)
980	1140	15.5	BLANK	SCREEN	Hvy Stainles Stainless St	8-5/8	.050
1140	1160	15.5	CON-DUCTOR	FILL PIPE			

DEPTH FROM SURFACE		ANNULAR MATERIAL			
FL	to FL	TYPE			FILTER PACK (TYPE/SIZE)
320	660	CE-MENT (✓)	BEN-TONITE (✓)	FILL (✓)	Sand Slurry
660	900				SRI#8 Sand
900	940		✓		Bentonite Chips
940	1180			✓	SRI#8 Sand

ATTACHMENTS (✓)

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analysis
- Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME **EATON DRILLING CO.**
(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

20 WEST KENTUCKY AVE

ADDRESS

Signed

Mark D. Davis

WELL DRILLER/AUTHORIZED REPRESENTATIVE

WOODLAND

CITY

CA

STATE

95695

ZIP

03/18/09

DATE SIGNED

C57 A HIC - 13378

C-57 LICENSE NUMBER

ORIGINAL
File with DWR

Page 2 of 2

Owner's Well No. 7985

Date Work Began 7/24/2006, Ended 8/4/2006

Local Permit Agency MONTEREY CNTY HEALTH DEPT

Permit No. 05-10703

Permit Date 12/29/2005

STATE OF CALIFORNIA
WELL COMPLETION REPORT

Refer to Instruction Pamphlet

No. **E046611**

DWR USE ONLY - DO NOT FILL IN

145/02E-28

STATE WELL NO./STATION NO.

LATITUDE LONGITUDE

APN/TRS/OTHER

GEOLOGIC LOG

WELL OWNER

ORIENTATION (✓)		VERTICAL	HORIZONTAL	ANGLE	(SPECIFY)
DEPTH FROM SURFACE		DRILLING METHOD ROTARY FLUID MUD			
Ft to Ft		DESCRIPTION			
		Describe material, grain, size, color, etc.			
0	727	EXISTING 16 INCH CASING			
727	780	YELLOW CLAY WITH BRITTLE CLAY STREAKS			
780	790	COARSE SAND			
790	810	YELLOW CLAY WITH BRITTLE CLAY STREAKS			
810	814	SAND			
814	836	YELLOW CLAY WITH BRITTLE CLAY STREAKS			
836	875	YELLOW CLAY WITH SAND			
875	895	YELLOW CLAY			
895	945	YELLOW CLAY WITH SAND			
945	962	COARSE SAND			
962	995	YELLOW AND BLUE CLAY STREAKS WITH SAND			
995	1025	COARSE SAND			
1025	1055	BRITTLE BLUE CLAY			
1055	1148	COARSE SAND WITH SMALL GRAVEL			
1148	1200	BRITTLE BLUE CLAY WITH SAND			
1200	1300	BRITTLE BLUE CLAY			

NOTE

EXISTING WELL 16" CASING TO 727 FEET.
DRILLED THROUGH BOTTOM DEEPENING
WELL TO 1180 FEET.

TOTAL DEPTH OF BORING 1200 (Feet)

TOTAL DEPTH OF COMPLETED WELL 1180 (Feet)

WELL LOCATION

Address 54 MI WOF COOPER RD & 27 MI SOF

City MCFADDEN RD CA

County MONTEREY

APN Book 414 Page 014 Parcel 017

Township 14 S Range 2 E Section 28

Latitude

DEG. MIN. SEC. LOCATION SKETCH NORTH SOUTH

DEG. MIN. SEC. ACTIVITY (✓)

NEW WELL

MODIFICATION/REPAIR

Deepen

Other (Specify)

DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (✓)

WATER SUPPLY

Domestic Public

✓ Irrigation Industrial

MONITORING

TEST WELL

CATHODIC PROTECTION

HEAT EXCHANGE

DIRECT PUSH

INJECTION

VAPOR EXTRACTION

SPARGING

REMEDIATION

OTHER (SPECIFY)

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER (Ft) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL 49.4 (Ft) & DATE MEASURED 8/14/2006

ESTIMATED YIELD 928 (GPM) & TEST TYPE

TEST LENGTH (Hrs) TOTAL DRAWDOWN 88.1 (Ft)

May not be representative of a well's long-term yield.

DEPTH FROM SURFACE			BORE - HOLE DIA. (Inches)	CASING (S)						
				TYPE (✓)				MATERIAL / GRADE	INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS
Ft	to	Ft	BLANK	SCREEN	CON- DUCTOR	FILL PIPE				
1050	1160	15.5		✓			HVY SS	8-5/8		.050
1160	1180	15.5	✓				STAINLESS	8-5/8		

DEPTH FROM SURFACE		ANNULAR MATERIAL			
Ft to Ft		TYPE			
		CE- MENT (✓)	BEN- TONITE (✓)	FILL (✓)	FILTER PACK (TYPE/SIZE)
320	740	✓			SAND SLURRY
740	1200			✓	SR#8 SAND

ATTACHMENTS (✓)

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analysis
- Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME EATON DRILLING CO.
(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

20 WEST KENTUCKY AVE

ADDRESS


Signed *Mark Danner*
WELL DRILLER/AUTHORIZED REPRESENTATIVE

WOODLAND
CITY

CA 95695
STATE ZIP

10/25/06
DATE SIGNED

C57 A HIC - 133783
C-57 LICENSE NUMBER

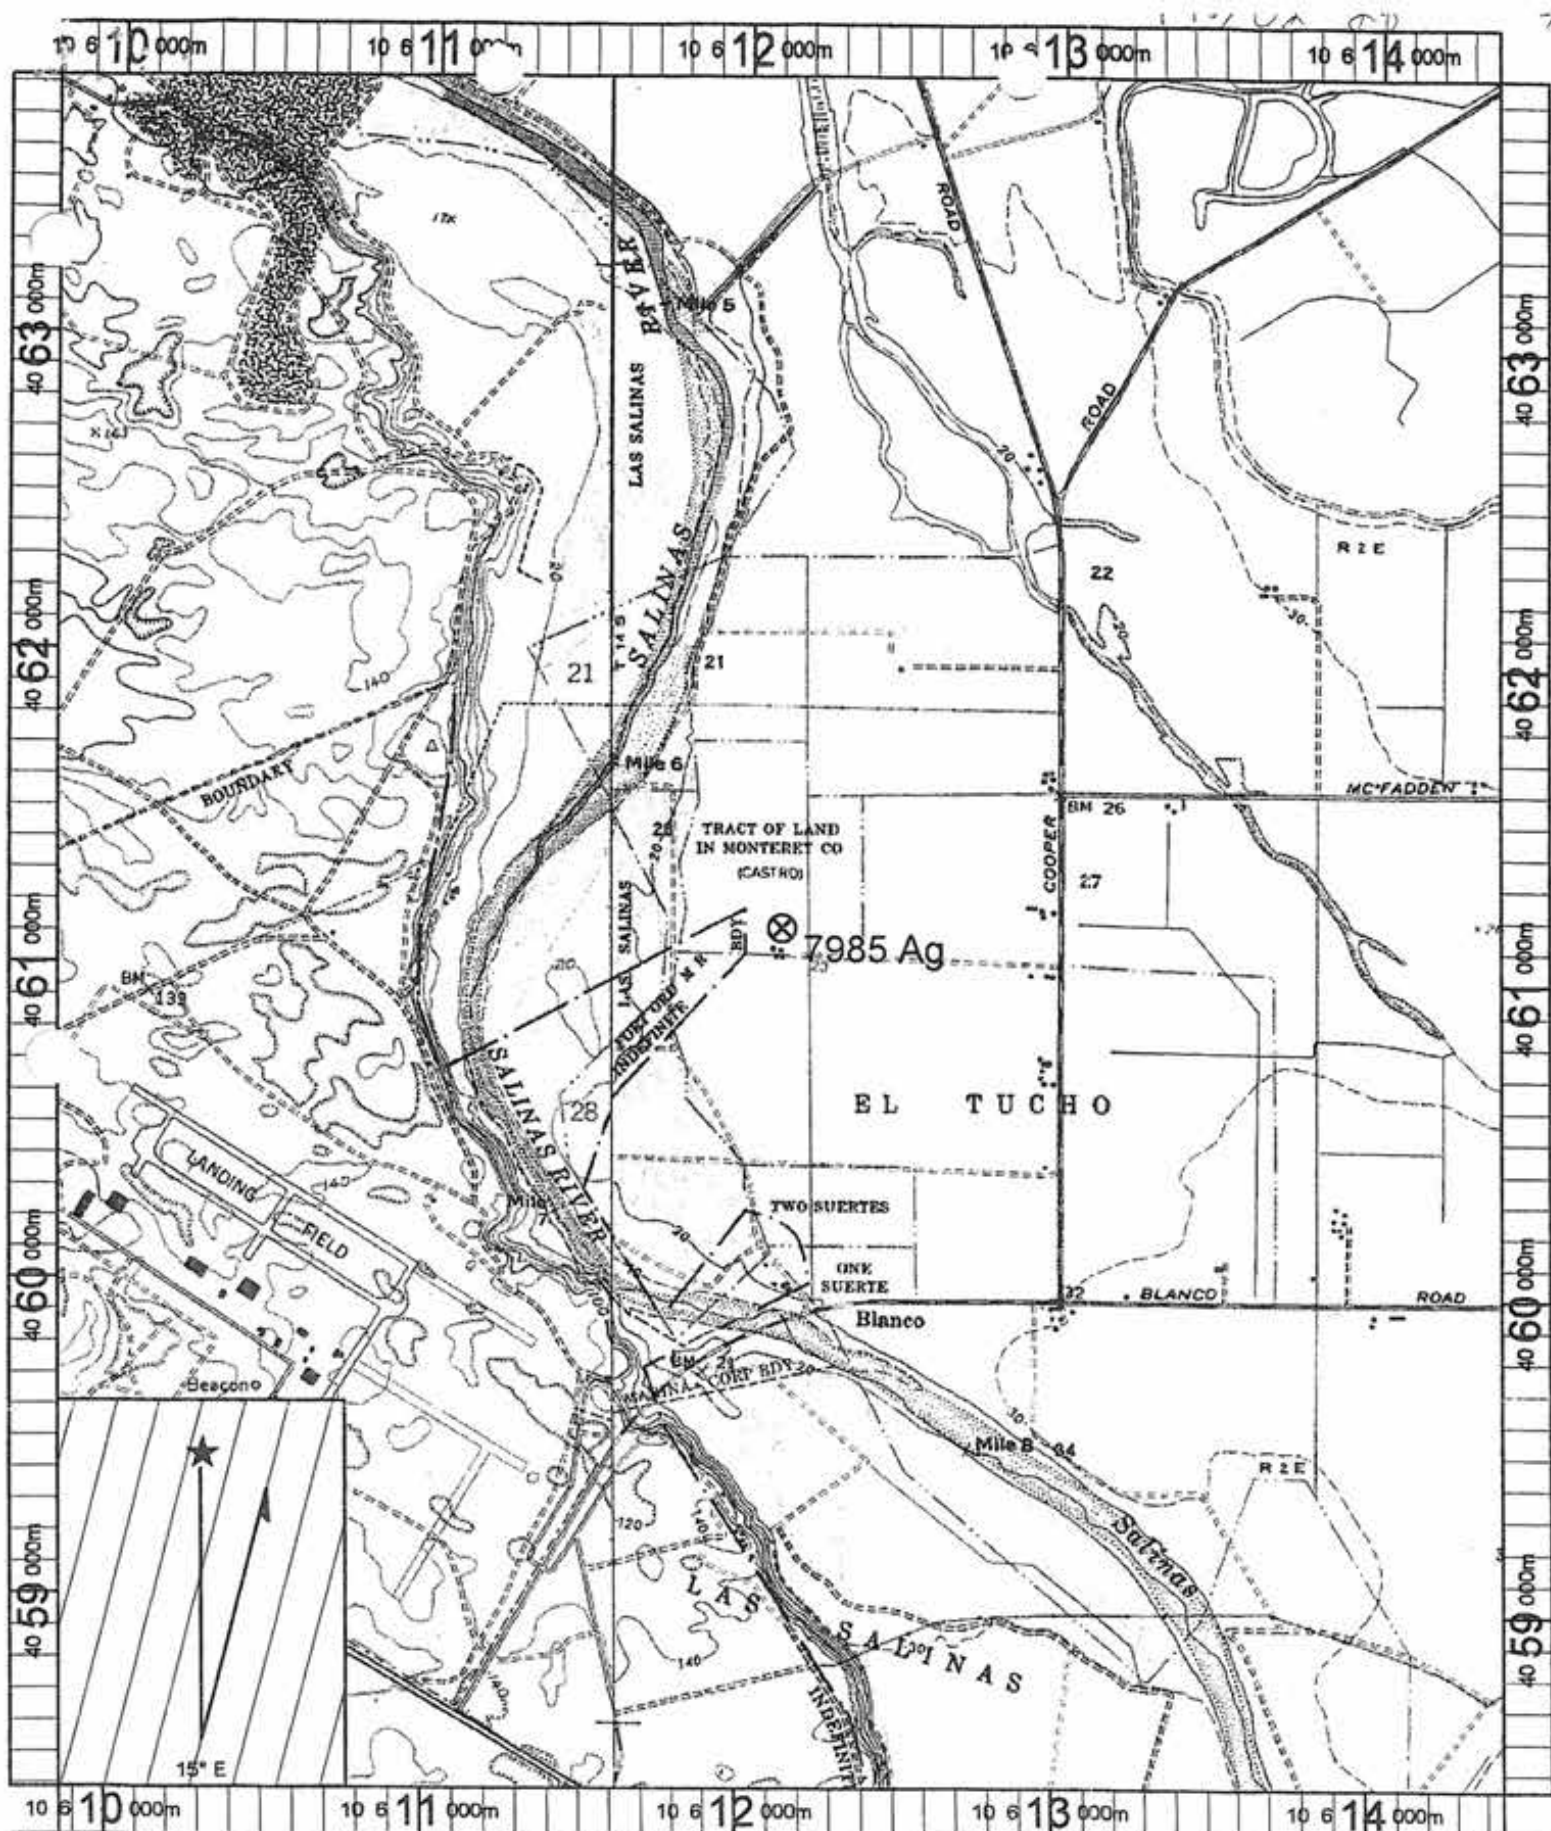

ame: SALINAS
 Date: 7/3/2006
 Scale: 1 inch equals 2000 feet

Caption: Ross Nisson - Job# 7985 Ag
 APN: 414-014-017
 T14S R2E s28

ORIGINAL
File with DWRSTATE OF CALIFORNIA
THE RESOURCES AGENCY
DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

No. 289272

Notice of Intent No. _____
Local Permit No. or Date April 4, 1989State Well No. 14/01
Other Well No. _____

(1) OWNER:

Address _____

City _____

(2) LOCATION OF WELL (See instructions):

County Monterey Owner's Well Number #12Well address if different from above Assessors Parcel No.

Township _____ Range _____ Section _____

Distance from cities, roads, railroads, fences, etc. _____

See attached map

(3) TYPE OF WORK

New Well ☒ Deepening ☐Reconstruction ☐Reconditioning ☐Horizontal Well ☐Destruction ☐ (Describe destruction materials and procedures in Item 12)

(4) PROPOSED USE

Domestic ☒Irrigation ☐Industrial ☐Test Well ☐Municipal ☒Other ☐

(Describe)

WELL LOCATION SKETCH

(5) EQUIPMENT:

Rotary ☐Reverse ☒Cable ☐Air ☐Other ☐Bucket ☐

(6) GRAVEL PACK Monterey Sand

Yes ☒ No ☐Diameter of bore 28"Packed from 1250 T.D. to 1420

(7) CASING INSTALLED:

Steel ☐Plastic ☐Concrete ☐

(8) PERFORATIONS MOSS

Type of perforation or size of screen Ful-Flo

From ft.	To ft.	Dia. in.	Gage or Wall	From ft.	To ft.	Slot size
0	600	28"	.312	1390	1420	.040
600	1390	16"	.312	1480	1530	.040
1940	1950	16"	.312	1660	1700	.040

(9) WELL SEAL: 1780-1810 ft. & 1830-1880 ft. and 1900-1940 ft.

Was surface sanitary seal provided? Yes ☒ No ☐ If yes, to depth 87 ft.Were strata sealed against pollution? Yes ☒ No ☐ Interval 0-1250 ft.Method of sealing cement grout seal

(10) WATER LEVELS:

Depth of first water, if known 100 ft.Standing level after well completion 100 ft.

(11) WELL TESTS:

Was well test made? Yes ☒ No ☐ If yes, by whom? Beylik DrillingType of test Pump ☒ Air lift ☐Depth to water at start of test 100 ft.Discharge 1800 gal/min after 72 hoursChemical analysis made? Yes ☒ No ☐ If yes, by whom? Marina C.W.D.Was electric log made? Yes ☒ No ☐ If yes, attach copy to this report(12) WELL LOG: Total depth 2020 ft. Completed depth 1950 ft.

from ft. to ft. Formation (Describe by color, character, size or material)

0	-	80 ft.	fine sand
80	-	100 ft.	fine sand/silt
100	-	110 ft.	fine sand
110	-	130 ft.	blue clay
130	-	160 ft.	sandy clay
160	-	250 ft.	fine sand
250	-	270 ft.	sandy clay
270	-	310 ft.	coarse sand and clay
310	-	390 ft.	brown clay, coarse fine sands
390	-	430 ft.	brown clay
430	-	490 ft.	coarse sand
490	-	520 ft.	fine sand
520	-	580 ft.	coarse sand/yellow clay
580	-	610 ft.	yellow clay
610	-	670 ft.	silty brown clay
670	-	920 ft.	brown clay, silty clay
920	-	950 ft.	coarse sand and clay
950	-	965 ft.	clay
965	-	1000 ft.	blue shale
1000	-	1110 ft.	clay and sand
1110	-	1200 ft.	clay and sand
1200	-	1230 ft.	clay and gray clay and sand
1230	-	1300 ft.	sandy clay
1300	-	1350 ft.	blue sandy clay
1350	-	1400 ft.	shale and clay
1400	-	1420 ft.	clay and coarse sand
1420	-	1520 ft.	blue clay, coarse sand
1520	-	1570 ft.	blue clay some shale
1570	-	1650 ft.	gray clay, sand and shale
1650	-	1680 ft.	fine sand
1680	-	1740 ft.	blue clay
1740	-	1860 ft.	clay, shale and sand
1860	-	1900 ft.	clay and shale
1900	-	1980 ft.	sand and clay
1980	-	2020 ft.	clay and sandy clay

Work started April 11, 1989 Completed May 5, 1989

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

Signed Dean MarshallNAME BEYLIK DRILLING, INC.

(Person, firm, or corporation) (Typed or printed)

Address 591 S. Walnut StreetCity La Habra, Calif ZIP 90631License No. 306291-C57&C-61 Date of this report Aug. 28, 1989

TRIPPLICATE
Owner's Copy

STATE OF CALIFORNIA
THE RESOURCES AGENCY
DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

Do not fill in.


No. 225501

Name of Interest No. _____
Local Permit No. or Date _____

State Well No. 146/02E-31401
Other Well No. PRESSURE-DEEP

WELL #10

(2) LOCATION OF WELL (See instructions):
County San Diego Owner's Well Number 10
Well address if different from above:
Township 14S Range 2E Section 32
Distance from cities, roads, railroads, fences, etc. 2600' south and 400'
east from NW corner of Section 32. North end of
Bayer Avenue

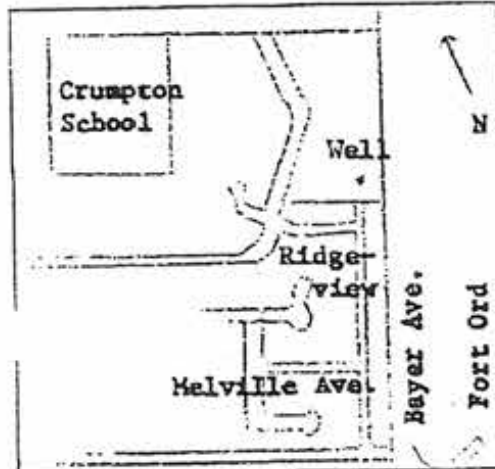

(3) TYPE OF WORK:
New Well ☒ Deepening ☐
Reconstruction ☐
Reconditioning ☐
Horizontal Well ☐
Destruction ☐ (Describe destruction materials and procedures in Item 12).

(4) PROPOSED USE:
Domestic ☒
Irrigation ☐
Industrial ☐
Test Well ☐
Stock ☐
Municipal ☐
Other ☐

(12) WELL LOG: Total depth 1569'. Depth of completed well 1550'
from ft. to ft. Formation (Describe by color, character, size or material)

0 -	73	Sand
73 -	93	Sand with cemented lenses
93 -	113	Sand
113 -	133	Sand with brown clay
133 -	153	Fine sand
153 -	213	Blue clay
213 -	223	Coarse sand
223 -	253	Coarse sand with gravel
253 -	263	Coarse sand
263 -	273	Fine sand
273 -	283	Boulders and sand
283 -	315	Sand and gravel
315 -	325	Boulders
325 -	374	Cement, coarse sand/gravel
374 -	380	Blue and brown clay
380 -	395	Tan clay and sand
395 -	475	Fine sand and silt
475 -	515	Sandy brown clay and silty sand, sea shells
515 -	525	Red sandy clay, brown clay, sand lenses
525 -	535	Fine silty sand
535 -	545	Hard red sandstone, sand, gravel
545 -	575	Red and gray clay
575 -	595	Brown sandstone
595 -	731	Tan silty clay
731 -	815	Tan clay
815 -	865	Tan sandy clay
865 -	885	Gray clay
885 -	905	Gray clay, gravel streaks
905 -	925	Tan sandy clay
925 -	950	Cemented gravel shale and sandy clay streaks
950 -	965	Brown sandy clay
965 -	975	Coarse sand, tan sand, clay
975 -	985	Cemented gravel, sand, sandy clay
985 -	1005	Gray clay, sand lenses, shells
1005 -	1025	Gray sandy clay, cem. gravel, shell

Work started 6-23 1983 Completed 19

(5) EQUIPMENT:

Rotary ☐ Reverse ☒
Cable ☐ Air ☐
Other ☐ Bucket ☐

(6) GRAVEL PACK: Monterey

Yes ☐ No ☐ Size No. 8 sand
Diameter of bore 24
Packed from 860 to 1550 ft.

(7) CASING INSTALLED:

Steel ☒ Plastic ☐ Concrete ☐

(8) PERFORATIONS: Johnson 16"

Type of perforation or size of screen

From ft.	To ft.	Dia. in.	Gage or Wall	From ft.	To ft.	Slot size
0	60	26	1/4	930	970	0.040
0	930	16	5/16	990	1010	0.040
970	990	16	5/16	1040	1080	0.040

(9) WELL SEAL:

Was surface sanitary seal provided? Yes ☒ No ☐ If yes, to depth 860 ft.
Were struts sealed against pollution? Yes ☐ No ☒ Interval _____ ft.
Method of sealing _____

(10) WATER LEVELS:

Depth of first water, if known _____ ft.
Standing level after well completion 155 ft.

(11) WELL TESTS:

Was well test made? Yes ☒ No ☐ If yes, by whom? Chappel
Type of test _____ Pump ☒ Bailor ☐ AM bit ☐
Depth to water at start of test 305 ft. At end of test 310 ft.
Discharge 2000 gal/min after 2-0 hours Water temperature _____
Chemical analysis made? Yes ☒ No ☐ If yes, by whom? Owner
Was electric log made? Yes ☒ No ☐ If yes, attach copy to this report

WELL DRILLER'S STATEMENT:

This well was drilled under my immediate supervision and this report is true to the best of my knowledge and belief.

SIGNED Stang Hydronics Inc. (Well Driller)
NAME Stang Hydronics Inc.
(Firm, firm, or corporation) (Typed or printed)
Address 3362 Fitzgerald Road
City Rancho Cordova, California No. 95670
License No. 394815 Date of this report 9-8-83

TRIPPLICATE
Owner's Copy

STATE OF CALIFORNIA
THE RESOURCES AGENCY
DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

Do not fill in

No. 225502

State Well No. 145/02E-31H01
Other Well No. _____

Notice of Intent No. _____
Local Permit No. or Date _____

(2) LOCATION OF WELL (See instructions): County _____ Owner's Well Number _____ Well address if different from above _____ Township _____ Range _____ Section _____ Distance from cities, roads, railroads, ferries, etc. _____	(12) WELL LOG: Total depth _____ ft. Depth of completed well _____ ft. from ft. to ft. A. Formation (Describe by color, character, size or material) 1025 - 1035 Blue clay, wood at 1033 1035 - 1055 Blue sandstone 1055 - 1075 Blue clay 1075 - 1085 Tan clay 1085 - 1108 Blue shale, sandstone streaks 1108 - 1137 Black sandy clay, black sandstone shells 1137 - 1155 Black sandy clay 1155 - 1173 Cemented sand, gravel, shells 1173 - 1180 Black sandy clay 1180 - 1185 Cemented sand, gravel, shells 1185 - 1212 Dark gray sandy clay 1212 - 1215 Cemented sand, gravel 1215 - 1225 Sticky blue clay 1225 - 1235 Blue sandstone 1235 - 1245 Sticky blue clay, sandy lenses 1245 - 1255 Sandy black clay with shale 1255 - 1265 Blue clay, fine gravel @ 1260 1265 - 1275 Blue sandstone, clay lenses 1275 - 1285 Blue sandstone 1285 - 1305 Black sandstone and shale 1305 - 1317 Sandy black clay 1317 - 1320 Black stone 1320 - 1328 clay and sandstone streaks 1328 - 1343 Sandy black clay 1343 - 1365 Sandstone 1365 - 1370 Gray sandy clay 1370 - 1375 Sandstone 1375 - 1395 Gray silty clay 1395 - 1398 Sandstone 1398 - 1408 Gray silty clay 1408 - 1410 Black sandstone 1410 - 1415 Silty blue clay 1415 - 1418 Black sandstone 1418 - 1435 Silty blue clay 1435 - 1437 Gray clay with gravel 1437 - 1445 Coarse sand, gravel																												
(3) TYPE OF WORK: New Well ☐ Deepening ☐ Renovation ☐ Reconditioning ☐ Horizontal Well ☐ Destruction ☐ (Describe destruction materials and procedures in Item 12) (4) PROPOSED USE: Domestic ☐ Irrigation ☐ Industrial ☐ Test Well ☐ Stock ☐ Municipal ☐ Other ☐	(6) GRAVEL PACK: Yes ☐ No ☐ Size _____ Diameter of bore _____ Packed from _____ to _____ ft.																												
(5) EQUIPMENT: Rotary ☐ Reverse ☐ Cable ☐ Air ☐ Other ☐ Bucket ☐	(8) PERFORATIONS: Type of perforation or size of screen <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>From ft.</th> <th>To ft.</th> <th>Dis. in.</th> <th>Cage or Wall</th> <th>From ft.</th> <th>To ft.</th> <th>Slot size</th> </tr> </thead> <tbody> <tr> <td>1010</td> <td>1040</td> <td>16</td> <td>5/16</td> <td>1190</td> <td>1210</td> <td>0.040</td> </tr> <tr> <td>1080</td> <td>1190</td> <td>16</td> <td>5/16</td> <td>1500</td> <td>1540</td> <td>0.040</td> </tr> <tr> <td>1210</td> <td>1500</td> <td>16</td> <td>5/16</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	From ft.	To ft.	Dis. in.	Cage or Wall	From ft.	To ft.	Slot size	1010	1040	16	5/16	1190	1210	0.040	1080	1190	16	5/16	1500	1540	0.040	1210	1500	16	5/16			
From ft.	To ft.	Dis. in.	Cage or Wall	From ft.	To ft.	Slot size																							
1010	1040	16	5/16	1190	1210	0.040																							
1080	1190	16	5/16	1500	1540	0.040																							
1210	1500	16	5/16																										
(7) CASING INSTALLED: Steel ☐ Plastic ☐ Concrete ☐	(9) WELL SEAL: Was surface sanitary seal provided? Yes ☐ No ☐ If yes, to depth _____ ft. Were struts sealed against pollution? Yes ☐ No ☐ Interval _____ ft. Method of sealing _____																												
(10) WATER LEVELS: Depth of first water, if known _____ ft. Standing level after well completion _____ ft.	(11) WELL TESTS: Was well test made? Yes ☐ No ☐ If yes, by whom? _____ Type of test _____ Pump ☐ Bailor ☐ Air lift ☐ Depth to water at start of test _____ ft. At end of test _____ ft. Discharge _____ gal/min after _____ hours Water temperature _____ Chemical analysis made? Yes ☐ No ☐ If yes, by whom? _____ Was electric log made? Yes ☐ No ☐ If yes, attach copy to this report																												
WELL DRILLER'S STATEMENT: This well was drilled under my jurisdiction and this report is true to the best of knowledge and belief. Signed _____ (Well Driller) NAME <u>Stang Hydraulics Inc.</u> (Person, firm, or corporation) (Typed or printed) Address <u>3362 Fitzgerald Road</u> City <u>Rancho Cordova, California</u> Zip <u>95670</u> License No. <u>394815</u> Date of this report <u>9-8-83</u>																													

TRIPPLICATE
Owner's Copy

STATE OF CALIFORNIA
THE RESOURCES AGENCY
DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

Do not fill
No. 225503

Name of Interest No. _____

Local Permit No. or Date _____

State Well No. 145/02E-31401

Other Well No. _____

(2) LOCATION OF WELL (See instructions):

County _____ Owner's Well Number _____

Well address if different from above _____

Township _____ Range _____ Section _____

Distance from cities, roads, railroads, fences, etc. _____

(12) WELL LOG: Total depth _____ ft. Depth of completed well _____ ft.
from ft. to ft. Formation (Describe by color, character, size of material)

1445 - 1455 Blue clay

1455 - 1475 Blue clay, sandstone streaks

1475 - 1485 Blue shale

1485 - 1505 Cemented gravel

1505 - 1511 Brown and gray clay

1511 - 1523 White sandy clay

1523 - 1535 ~~Gray~~ Shale

1535 - 1540 Green clay, shale

1540 - 1544 Fine to coarse sand

1544 - 1546 Green clay and shale

1546 - 1550 Green clay, white sandy clay,

blue shale

1550 - 1557 Black sandstone

1557 - 1560 Green sandy clay, white sandstone

black shale

1560 - 1569 Blue sandstone, white sandstone

(3) TYPE OF WORK:

New Well ☐ Deepening ☐

Reconstruction ☐

Retooling ☐

Horizontal Well ☐

Destruction ☐ (Describe destruction materials and procedures in Item 12)

(4) PROPOSED USE:

Domestic ☐

Irrigation ☐

Industrial ☐

Test Well ☐

Stock ☐

Municipal ☐

Other ☐

WELL LOCATION SKETCH

(5) EQUIPMENT:

Borey ☐

Reverse ☐

Cable ☐

Air ☐

Other ☐

Bucket ☐

(6) GRAVEL PACK:

Yes ☐ No ☐ Size _____

Diameter of bore _____

Packed from _____ to _____ ft.

(7) CASTING INSTALLED:

Steel ☐

Plastic ☐

Concrete ☐

(8) PERFORATIONS:

Type of perforation or size of screen _____

From ft.	To ft.	Dia. in.	Gage or Wall	From ft.	To ft.	Slot size
1540	1550	16	5/16			

(9) WELL SEAL:

Was surface sanitary seal provided? Yes ☐ No ☐ If yes, to depth _____ ft.

Were struts sealed against pollution? Yes ☐ No ☐ Interval _____ ft.

Method of sealing _____

(10) WATER LEVELS:

Depth of first water, if known _____ ft.

Standing level after well completion _____ ft.

(11) WELL TESTS:

Was well test run? Yes ☐ No ☐ If yes, by whom? _____

Type of test Pump ☐ Bailor ☐ Air lift ☐

Depth to water at start of test _____ ft. At end of test _____ ft.

Discharge _____ gal/min after _____ hours Water temperature _____

Chemical analysis made? Yes ☐ No ☐ If yes, by whom? _____

Was electric log made? Yes ☐ No ☐ If yes, attach copy to this report

Work started _____ 19____ Completed _____ 19____

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

SIGNED _____ (Well Driller)

NAME Stang Hydraulics Inc.
(Person, firm, or corporation) (Typed or printed)

Address 3362 Fitzgerald Road
City Rancho Cordova, California Zip 95670

License No. 294815 Date of this report 9-8-83

ORIGINAL

File with DWR

STATE OF CALIFORNIA
THE RESOURCES AGENCY
DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

Do not fill in

No. 240867

Permit No. 232508
Date 11-4-85

State Well No. 145/2E-32D4
Other Well No.

OWNER [Redacted]
Address [Redacted]
City [Redacted]

(2) LOCATION OF WELL (See instructions):
County Monterey Owner's Well Number No. 11
Well address if different from above
Township Range Section
Distance from cities, roads, railroads, fences, etc. approx. 140 ft. West
of Salinas Ave. at Reservation Road
Marina, Calif. 93933

(12) WELL LOG: Total depth 1700 ft. Depth of completed well 1660 ft.
from ft. to ft. Formation (Describe by color, character, size or material)

0	-	50 ft.	sand, fine gravel
50	-	60 ft.	gravel
60	-	80 ft.	clay
80	-	90 ft.	sand and wood
90	-	110 ft.	sticky sand
110	-	120 ft.	sand and wood
120	-	140 ft.	sand
140	-	170 ft.	clay
170	-	190 ft.	fine gravel, little clay
190	-	200 ft.	gravel
200	-	210 ft.	clay
210	-	220 ft.	gravel, pieces of clay
220	-	230 ft.	gravel and clay
230	-	260 ft.	clay
260	-	270 ft.	gravel
270	-	290 ft.	gravel, small amt. clay
290	-	310 ft.	fine gravel
310	-	330 ft.	gravel, clay and sand
330	-	340 ft.	rock and clay
340	-	360 ft.	sand and rock
360	-	370 ft.	clay
370	-	380 ft.	gravel, little clay
380	-	390 ft.	clay, gravel mixed
390	-	400 ft.	clay and gravel
400	-	440 ft.	gravel
440	-	490 ft.	clay
490	-	500 ft.	gravel and sme clay
500	-	510 ft.	clay
510	-	540 ft.	clay and sand
540	-	550 ft.	sand
550	-	580 ft.	clay
580	-	590 ft.	sandy red clay
590	-	650 ft.	sandy clay
650	-	660 ft.	gravel and small rocks
660	-	670 ft.	clay, small amt. gravel
670	-	790 ft.	clay
790	-	810 ft.	sand and rocks

(3) TYPE OF WORK:

New Well ☒ Deepening ☐
Reconstruction ☐
Reconditioning ☐
Horizontal Well ☐
Destruction ☐ (Describe destruction materials and procedures in item 12)
(4) PROPOSED USE:
Domestic ☐
Irrigation ☐
Industrial ☐
Test Well ☐
Stock ☐
Municipal ☒
Other ☐

WELL LOCATION SKETCH

(5) EQUIPMENT:

Rotary ☐ Reverse ☒
Cable ☐ Air ☐
Other ☐ Bucket ☐

(6) GRAVEL PACK: Monterey Sand

Yes ☒ No ☐ Size 18
Diameter of bore 28
Packed from 880 to 1660 ft.

(7) CASING INSTALLED:

Steel ☒ Plastic ☐ Concrete ☐

(8) PERFORATIONS: Johnson Screens

Type of perforation in size of screen 28

From ft.	To ft.	Dia. in.	Gauge of Wall	From ft.	To ft.	Slot size
0	880	30	5/16"	970	1100	240
0	1660	16	5/16"	1540	1570	
				1610	1660	

(9) WELL SEAL:

Was surface sanitary seal provided? Yes ☒ No ☐ If yes, to depth 880 ft.
Were strata sealed against pollution? Yes ☒ No ☐ Interval 0 - 880 ft.
Method of sealing 6 sack grout mix

(10) WATER LEVELS:

Depth of first water, if known 168 ft.
Standing level after well completion 168 ft.

(11) WELL TESTS:

Was well test made? Yes ☒ No ☐ If yes, by whom? Beylik Drilling
Type of test Pump ☒ Bailer ☐ Air lift ☐
Flow to water at start of test 168 ft. At end of test 168 ft.
Rate 2500 gal/min after 133 hours Water temperature
Chemical analysis made? Yes ☐ No ☐ If yes, by whom?
Electric log made? Yes ☒ No ☐ If yes, attach copy to this report

Work started Nov. 4, 1985 Completed January 9, 1986

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

SIGNED [Signature] (Well Driller)

NAME BEYLIK DRILLING, INC.
(Person, firm, or corporation) (Typed or printed)

Address 591 S. Walnut Street

City La Habra, Calif. Zip 90631

License No. 306291-C57&SC-61 Date of this report Jan. 21, 1986

Well produced 2500 GPM after 133hrs. with
drawdown of 180. and specific yield of: 11.11

STATE OF CALIFORNIA
THE RESOURCES AGENCY
DEPARTMENT OF WATER RESOURCES
WATER WELL DRILLERS REPORT

Do not fill in
No. 240868
145/2E-32D4
State Well No. _____
Other Well No. _____

Notice of Intent No. 232508
Loc. mit No. or Date 11/4/85

(1) [Redacted]		(12) WELL LOG: Total depth 1700 ft. Depth of completed well 1660 ft.	
Add. [Redacted]		from ft. to ft. Formation (Describe by color, character, size or material)	
City [Redacted]		810 - 820 ft. clay and rock	
(2) LOCATION OF WELL (See instructions):		820 - 830 ft. gravel, little clay	
County Monterey Owner's Well Number #11		830 - 960 ft. clay	
Well address if different from above		960 - 970 ft. sand clay and rock	
Township Range Section		970 - 990 ft. sand and rock	
Distance from cities, roads, railroads, fences, etc. approx. 140 ft. West		990 - 1000 ft. small amt. clay, gravel and rocks	
of Salinas Ave. at Reservation Road,		1000 - 1010 ft. gravel, small rocks	
Marina, Calif. 93933		1010 - 1040 ft. silty clay	
(3) TYPE OF WORK:		1040 - 1050 ft. silty clay, trace of gravel	
New Well ☒ Deepening ☐		1050 - 1060 ft. silty clay, gravel	
Reconstruction ☐		1060 - 1090 ft. clay	
Reconditioning ☐		1090 - 1094 ft. granite, decomposed	
Horizontal Well ☐		1094 ft - 1100 ft. granite, sea shells	
Destruction ☐ (Describe destruction materials and procedures in Item 12)		1100 - 1160 ft. clay	
(4) PROPOSED USE:		1160 - 1170 ft. clay, small amt. gravel	
Domestic ☐		1170 - 1180 ft. clay	
Irrigation ☐		1180 - 1190 ft. clay, small amt. gravel	
Industrial ☐		1190 - 1220 ft. clay	
Test Well ☐		1220 - 1230 ft. sand and clay	
Stock ☐		1230 - 1240 ft. rock and clay	
Municipal ☒		1240 - 1310 ft. clay	
Other ☐		1310 - 1330 ft. hard brittle clay	
WELL LOCATION SKETCH		1330 - 1350 ft. chunks of hard clay	
(5) EQUIPMENT:		1350 - 1390 ft. clay	
Rotary ☐ Reverse ☒		1390 - 1480 ft. soft clay	
Cable ☐ Air ☐		1480 - 1500 ft. clay, sand and rock	
Other ☐ Bucket ☐		1500 - 1510 ft. clay and sand	
(6) GRAVEL PACK: Monterey Sand		1510 - 1530 ft. clay	
Yes ☒ No ☐ Size 8 x 16		1530 - 1539 ft. clay and sand	
Diameter of bore 28"		1539 - 1570 ft. sand and clay	
Packed from 880 to 1660 ft.		1570 - 1580 ft. green soft clay, sandy	
(7) CASING INSTALLED:		1580 - 1590 ft. white sandy clay, little clumps	
Steel ☒ Plastic ☐ Concrete ☐		1590 - 1600 ft. clay, soft	
(8) PERFORATIONS: Johnson		1600 - 1620 ft. clay, some sand, and gravel	
Type of perforation or size of screen		1620 - 1650 ft. rock, sand and clay	
From ft. To ft. Dia. in. Gauge of Wall		1650 - 1670 ft. gravel 85%, white clay: 15%	
0 880 30 5/16"		1670 - 1680 ft. white clay, sand and small gravel	
0 1660 16 5/16"		1680 - 1700 ft. hard conglomerates - end-end-er	
(9) WELL SEAL: 1650 ft.		Work started Nov. 4, 1985 Completed Jan. 9, 1986	
Was surface sanitary seal provided? Yes ☒ No ☐ If yes, to depth 880 ft.		WELL DRILLER'S STATEMENT:	
Were strata sealed against pollution? Yes ☒ No ☐ Interval 0 - 880 ft.		This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.	
Method of sealing 6 sack grout mix		SIGNED [Signature] (Well Driller)	
(10) WATER LEVELS:		NAME BEYLIK DRILLING, INC.	
Depth of first water, if known 168 ft.		(Person, firm, or corporation) (Typed or printed)	
Standing level after well completion 168 ft.		Address 591 S. Walnut Street	
(11) WELL TESTS:		City La Habra, Calif. Zip 90631	
Was well test made? Yes ☒ No ☐ If yes, by whom? Beylik Drilling		License No. 306291C57&SC-61 Date of this report Jan. 21, 1986	
Type of test Pump ☒ Bailor ☐ Air lift ☐			
Depth to water at start of test 168 ft. At end of test 168 ft.			
I 2500 gal/min after 133 hours Water temperature			
Chemical analysis made? Yes ☐ No ☐ If yes, by whom?			
Electric log made? Yes ☒ No ☐ If yes, attach copy to this report			

Well produced 2500 GPM after 133 hrs. with
drawdown of 180 and a specific yield of: 11.11

14S/02E-33E01 (FC 26313)

14S/02E-33E02 (FC 26314)

ORIGINAL
File with DWRPage 1 of 1Owner's Well No. [REDACTED]Date Work Began Jan 6 2025 Ended Jan 25 2025Local Permit Agency Monterey County Dept of HealthPermit No. 04-18447Permit Date 10/19/04STATE OF CALIFORNIA
WELL COMPLETION REPORT

Refer to Instruction Pamphlet

No. 737000

DWR USE ONLY - DO NOT FILL IN	
STATE WELL NO./STATION NO.	
LATITUDE	LONGITUDE
APR/TS/OTHER	

GEOLOGIC LOG

ORIENTATION (±) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DRILLING METHOD Mud Rotary FLUID retake water

DEPTH FROM SURFACE

Fe	To	Fe	DESCRIPTION
			Describe material, grain size, color, etc.
			<u>See attached geologic log.</u>



WELL LOCATION

Address 3200 Eugin Road

City Marina

County Monterey

APN Book 145 Page 114 Parcel 031-111-037

Township 14S Range R2E Section 11A

Latitude 36° 40' 24" NORTH Longitude 121° 45' 10" WEST

LOCATION SKETCH

ACTIVITY (±)

☒ NEW WELL

MODIFICATION/REPAIR

☐ Deepen

☐ Other (Specify)

DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (±)

WATER SUPPLY

☐ Domestic ☐ Public

☐ Irrigation ☐ Industrial

MONITORING ☒

TEST WELL ☐

CATHODIC PROTECTION ☐

HEAT EXCHANGE ☐

DIRECT PUSH ☐

INJECTION ☐

VAPOR EXTRACTION ☐

SPARGING ☐

REMEDIATION ☐

OTHER (SPECIFY) ☐

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER ~100 (Fe) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL 100.1 (Fe) & DATE MEASURED Jan 24, 2025

ESTIMATED YIELD ~1/4 (GPM) & TEST TYPE N/A

TEST LENGTH N/A (Hrs) TOTAL DRAWDOWN N/A (Fe)

Note: 2-upper well
1-lower well

* May not be representative of a well's long-term yield.

TOTAL DEPTH OF BORING 2025 (Feet)

TOTAL DEPTH OF COMPLETED WELL 1760 (Feet)

DEPTH FROM SURFACE			BORE-HOLE DIA. (inches)	CASING (S)							DEPTH FROM SURFACE			ANNULAR MATERIAL				
				TYPE (S)				MATERIAL / GRADE	INTERNAL DIAMETER (inches)	GAUGE OR WALL THICKNESS				SLOT SIZE IF ANY (inches)	TYPE			
FL	TO	FL	BLANK	SCREEN	CON. DUCTOR	FILL PIPE									FL	TO	FL	CE- MENT (S)
0	40				✓			Steel	16	5/8	—	0	50		✓			11-sack mix.
5	1045			✓				PVC	2-in	sch 80	—	50	1045			✓		Pure Gravel
1045	1095			✓				PVC	2-in	sch 80	0.20	1045	1112				✓	#3 w/ #60 TS
0	1680			✓				PVC	3-in	sch 80	—	1112	1680			✓		1/2 Gravel
1680	1760			✓				PVC	3-in	sch 80	0.20	1680	1771				✓	#3 w/ #60 TS
												1771	1885		✓			Pure Gravel

ATTACHMENTS (±)

- ☒ Geologic Log
- ☐ Well Construction Diagram
- ☐ Geophysical Logs
- ☐ Soil/Water Chemical Analyses
- ☐ Other


ATTACH ADDITIONAL INFORMATION IF IT EXISTS

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME WDC ExplorationADDRESS P.O. Box 1417, Marina, CA 95698Signed Jim WhitleyDATE SIGNED 4-18-05 STATE CA ZIP 95698

C-57 LICENSE NUMBER

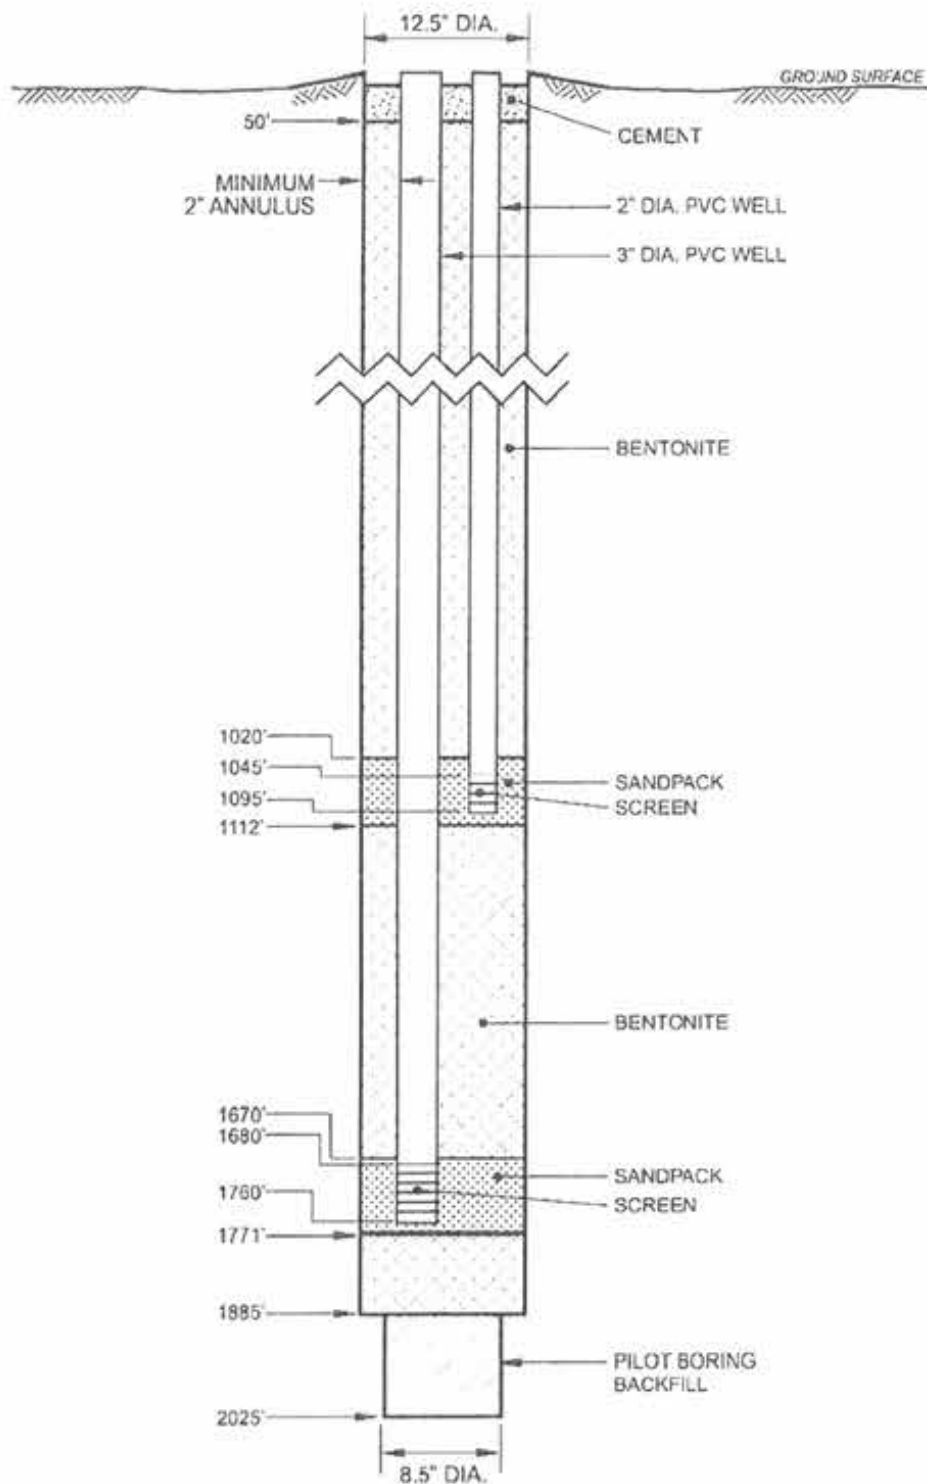

SCHEM. Pilot Boring ver 2 Pmt0



Schematic of DMW-2 Well Construction

Marina, California

PLATE

3

DRAWN
CN

JOB NUMBER
4098042052 02

CHECKED
[Signature]

CHECKED DATE
05/05

APPROVED
[Signature]

APPROVED DATE
7-7-05

ORIGINAL
File with DWR
Page 1 of 1

Owner's Well No. Well D Test Hole

Date Work Began 1/15/95 Ended 2/28/95

No. 555850

Local Permit Agency Monterey County Health Dept.

Permit No. WSAL 95035

Permit Date 1/23/95

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

UPPER AQUIFER - 446 ft. Well

DWR USE ONLY - DO NOT FILL IN
1.5 S 10.2 E - 041 A 01
STATE WELL NO./STATION NO.
LATITUDE LONGITUDE
1.5 S 10.2 E - 041 A 01
APN/TRS/OTHER

GEOLOGIC LOG

ORIENTATION (°) — VERTICAL — HORIZONTAL — ANGLE — (SPECIFY)

DEPTH TO FIRST WATER (Ft.) BELOW SURFACE

DEPTH FROM SURFACE

Ft. to Ft. DESCRIPTION

0 140 Sand, light brown, fine to medium

grained

140 335 Sand, light brown, fine to coarse

grained, subrounded to rounded

335 440 Sand with chert pebbles and shell

fragments, coarse grained

440 470 Silty clay with sand and gravel

470 480 Sand with chert pebbles

480 495 Diatomaceous claystone with sand

495 530 Sand with silt and rounded diatomaceous

claystone fragments

530 580 Clay, reddish brown to gray brown

with interbedded sand

580 610 Sand with chert pebbles and thin

clay layers, coarse grained

610 645 Clay, orange brown soft minor sand

645 690 Sand with chert pebbles, coarse

grained, subangular

690 735 Interbedded layers of sand and soft

light yellow brown clay

735 870 Clay, light brown, stiff, local

sand and gravel lenses

870 905 Clay blue gray, stiff

905 1050 Sand, white to light brown, fine

to coarse grained minor gravel

1050 1205 Clay, gray to light brown, stiff,

minor fine grained sand

1205 1212 Sand, light gray, very fine grained

WELL LOCATION STATE ZIP

Address Reservation Road At Garrison

City Ft. Ord

County Monterey, CA

APN Book Page Parcel

Township Range Section

Latitude Longitude

DEG. MIN. SEC. NORTH Longitude DEG. MIN. SEC. WEST

LOCATION SKETCH NORTH

Blanco X

Reservation Rd

Garrison

WEST Hux 2

Activity (°)

X NEW WELL

MODIFICATION/REPAIR

Deepen

Other (Specify)

DESTROY (Describe

Procedures and Materials

Under "GEOLOGIC LOG")

PLANNED USE(S)

X MONITORING

WATER SUPPLY

Domestic

Public

Irrigation

Industrial

"TEST WELL"

CATHODIC PROTECTION

OTHER (Specify)

Illustrate or Describe Distance of Well from Landmarks

such as Roads, Buildings, Fences, Rivers, etc.

PLEASE BE ACCURATE & COMPLETE.

DRILLING METHOD Rotary

FLUID mud

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH OF STATIC

WATER LEVEL (Ft.) & DATE MEASURED

ESTIMATED YIELD* (GPM) & TEST TYPE

TEST LENGTH (Hrs.) TOTAL DRAWDOWN (Ft.)

* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE

Ft. to Ft.

CEMENT BEN-TONITE FILL FILTER PACK

(°) (°) (°) (TYPE/SIZE)

See attached

2000

FEB 20 1996

ATTACHMENTS (°)

Geologic Log

X Well Construction Diagram

Geophysical Log(s)

Soil/Water Chemical Analyses

Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME Reylik Drilling, Inc.

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)


3429 Longview Drive North Highlands CA 95660

City State Zip


Signed [Signature] DATE SIGNED 3/14/95 326291

WELL DRILLER/AUTHORIZED REPRESENTATIVE C57 LICENSE NUMBER

155/φ2E-φ4Aφ1
 155/φ2E-φ4Aφ2
 155/φ2E-φ4Aφ3

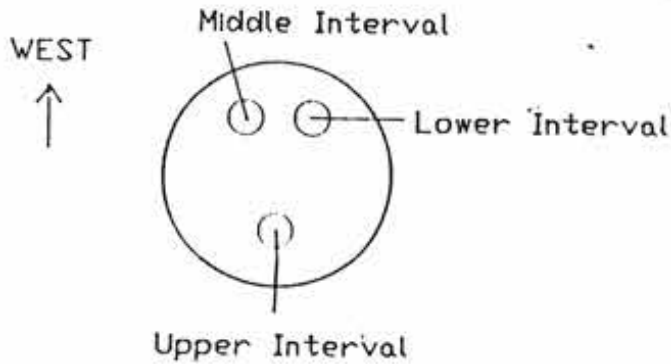

- 420-440 Upper Screen
- 590-610 Intermed Screen
- 890-910 Lower Screen
- 0-362 Cement
- 362-371 Gravel/Benseal
- 371-474 Gravel
- 474-532 Cement
- 532-542 Gravel/Benseal
- 542-656 Gravel
- 656-830 Cement
- 830-869 Gravel/Benseal
- 869-937 Gravel Pack
- 937-1208 Cement Plug

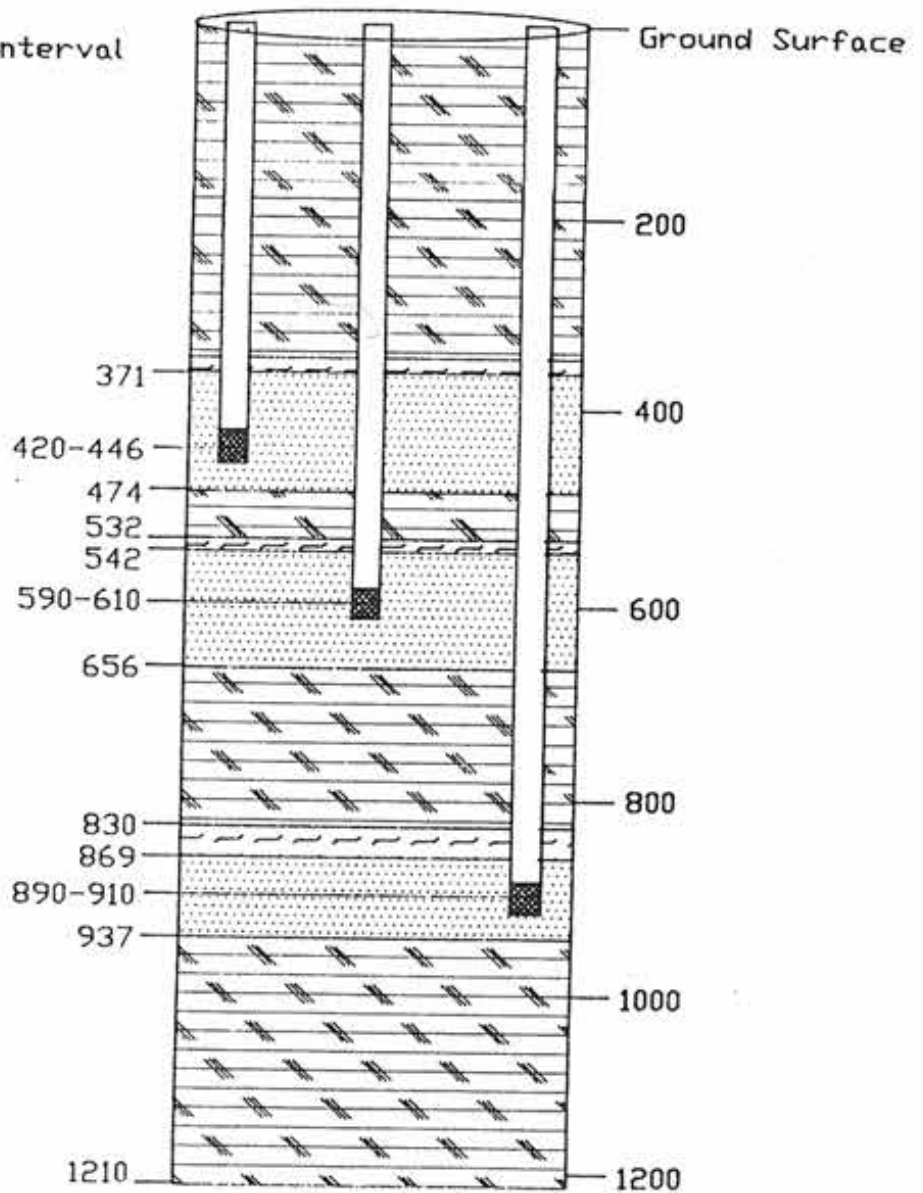

File Original with DWR

FC 25375

State of California

Well Completion Report

Refer to Instruction Pamphlet

No. e0131077

Page 1 of 2

Owner's Well Number Well 34

Date Work Began 02/22/2011

Date Work Ended 5/4/2011

Local Permit Agency Monterey County Division of Environmental Health

Permit Number 10-11860

Permit Date 2/11/11

DWR Use Only - Do Not Fill In

1	5	S	/	1	0	2	E	-	0	4	A	0	4
State Well Number/Site Number													
Latitude							Longitude						
1	5	S	/	1	0	2	E	-	0	4	A	0	4
APN/TRS/Other													

Geologic Log

Orientation ☒ Vertical ☐ Horizontal ☐ Angle Specify _____
Drilling Method _____ Drilling Fluid Fresh Water

Depth from Surface _____ Description _____
Feet to Feet Describe material, grain size, color, etc

0	7	Gray sand
7	145	Bm. sand
145	150	Blue clay
150	155	Bm. clay
155	270	Bm. sand
270	290	Bm. clay
290	310	Bm. sandy clay
310	335	Sand & gravel
335	340	Bm. clay
340	360	Sand & gravel
360	400	Bm. clay
400	470	Sand & gravel
470	475	Bm. clay
475	485	Bm. clay & gravel
485	505	Bm. sandy clay
505	510	Bm. clay
510	515	Bm. sandy clay
515	545	Bm. clay & gravel
545	580	Bm. sandy clay
580	585	Bm. clay & gravel
585	605	Bm. sand
605	628	Bm. clay
628	650	Sand & gravel
650	665	Bm. sandy clay
665	725	Bm. clay
725	730	Bm. sandy clay
730	745	Bm. clay
745	755	Bm. sandy clay
755	760	Bm. clay
760	775	Bm. sandy clay

Total Depth of Boring 1110 Feet

Total Depth of Completed Well 1095 Feet

Well Owner

Well Location

Address 565 Reservation Road

City Marina County Monterey

Latitude _____ N Longitude _____ W
Dec. Min. Sec. Dec. Min. Sec.

Datum _____ Decimal Lat. _____ Decimal Long. _____

APN Book 031 Page 011 Parcel 012

Township _____ Range _____ Section _____

Location Sketch

(Sketch must be drawn by hand after form is printed.)

North



Activity

- ☒ New Well
☐ Modification/Repair
☐ Deepen
☐ Other _____
☐ Destroy
Describe procedures and materials under "GEOLOGIC LOG"

Planned Uses

- ☒ Water Supply
☐ Domestic ☒ Public
☐ Irrigation ☐ Industrial
☐ Cathodic Protection
☐ Dewatering
☐ Heat Exchange
☐ Injection
☐ Monitoring
☐ Remediation
☐ Sparging
☐ Test Well
☐ Vapor Extraction
☐ Other _____

Water Level and Yield of Completed Well

Depth to first water _____ (Feet below surface)

Depth to Static _____

Water Level 201 (Feet) Date Measured 05/04/2011

Estimated Yield * 2,000 (GPM) Test Type Constant Rate

Test Length 9.0 (Hours) Total Drawdown 170 (Feet)

*May not be representative of a well's long term yield.

Casings

Depth from Surface Feet to Feet	Borehole Diameter (Inches)	Type	Material	Wall Thickness (Inches)	Outside Diameter (Inches)	Screen Type	Slot Size if Any (Inches)
0	55	38	Conductor	Low Carbon Steel	3/8	32	
0	695	28	Fill pipe	304 Stainless Steel	SCH 40	2.25	
0	598	28	Blank	HSLA	3/8	18.75	
598	603	28	Reducer	HSLA	3/8	18 x14	
603	605	28	Dielectric	HSLA X Stainless	3/8	14.5	
605	705	22	Blank	304 Stainless Steel	5/16	14.5	

Annular Material

Depth from Surface Feet to Feet	Fill	Description
0	55	Cement 10 SACK
0	685	Cement Neat cement
685	1,110	Filter Pack 8 X 16

Attachments

- ☐ Geologic Log
☐ Well Construction Diagram
☐ Geophysical Log(s)
☐ Soil/Water Chemical Analyses
☐ Other _____

Attach additional information, if it exists

Certification Statement

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief

Name Maggiora Bros. Drilling, Inc.

Person, Firm or Corporation

595 Airport Blvd.

Watsonville

CA 95076

Signed *[Signature]*

05/24/2011

249957

Date Signed C-57 License Number

File Original with DWR

State of California Well Completion Report

Refer to Instruction Pamphlet

No. e0131077

Page 2 of 2

Owner's Well Number Well 34

Date Work Began 02/22/2011

Date Work Ended 5/4/2011

Local Permit Agency Monterey County Division of Environmental Health

Permit Number 10-11860

Permit Date 2/11/11

DWR Use Only - Do Not Fill In

State Well Number/Site Number

N

Latitude

Longitude

W

APN/TRS/Other

Geologic Log

Orientation ☒ Vertical ☐ Horizontal ☐ Angle Specify _____
Drilling Method _____ Drilling Fluid _____ Fresh Water _____

Depth from Surface _____ Description _____
Feet to Feet Describe material, grain size, color, etc.

775	780	Bm. clay
780	795	Bm. sandy clay
795	830	Bm. clay
830	840	Sand & gravel
840	865	Bm. clay
865	875	Bm. sand & clay
875	895	Bm. clay
895	930	Fine bm. sand
930	955	Bm. sand & clay
955	960	Bm. sand, clay & gravel
960	1,090	Bm. sand & clay
1090	1,110	Bm. clay

Total Depth of Boring 1110 Feet

Total Depth of Completed Well 1095 Feet

Well Owner

Well Location

Address 565 Reservation Road

City Marina County Monterey

Latitude _____ N Longitude _____ W

Datum _____ Decimal Lat. _____ Decimal Long. _____

APN Book 031 Page 011 Parcel 012

Township _____ Range _____ Section _____

Location Sketch

(Sketch must be drawn by hand after form is printed.)

North

West

South

Illustrate or describe distance of well from roads, buildings, fences, rivers, etc. and attach a map. Use additional paper if necessary. Please be accurate and complete.

Activity

☒ New Well

☐ Modification/Repair

☐ Deepen

☐ Other _____

☐ Destroy

Describe procedures and materials under "GEOLOGIC LOG"

Planned Uses

☒ Water Supply

☐ Domestic ☒ Public

☐ Irrigation ☐ Industrial

☐ Cathodic Protection

☐ Dewatering

☐ Heat Exchange

☐ Injection

☐ Monitoring

☐ Remediation

☐ Sparging

☐ Test Well

☐ Vapor Extraction

☐ Other _____

Water Level and Yield of Completed Well

Depth to first water _____ (Feet below surface)

Depth to Static _____

Water Level _____ (Feet) Date Measured _____

Estimated Yield * _____ (GPM) Test Type _____

Test Length _____ (Hours) Total Drawdown _____ (Feet)

*May not be representative of a well's long term yield.

Casings

Depth from Surface Feet to Feet	Borehole Diameter (Inches)	Type	Material	Wall Thickness (Inches)	Outside Diameter (Inches)	Screen Type	Slot Size If Any (Inches)
705	1,085	22	Screen	304 Stainless Steel	14.5	Wire Wrap	0.050
1,085	1,095	22	Blank	304 Stainless Steel	5/16		

Annular Material

Depth from Surface Feet to Feet	Fill	Description
0	685	Cement
685	1,110	Filter Pack
		8 X 16

Attachments

- ☐ Geologic Log
- ☐ Well Construction Diagram
- ☐ Geophysical Log(s)
- ☐ Soil/Water Chemical Analyses
- ☐ Other _____

Attach additional information, if it exists.

Certification Statement

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief
Name Maggiore Bros. Drilling, Inc.

Person, Firm or Corporation

595 Airport Blvd.

Address

Watsonville

City

CA 95076

State

Zip

Signed _____

C-57 Licensed Water Well Contractor

05/24/2011

Date Signed

249957

C-57 License Number

STATE OF CALIFORNIA
WELL COMPLETION REPORT

Refer to Instruction Pamphlet

No. **768941**

Page 1 of 1

Owner's Well No. **New 2002**

Date Work Began **1/10/02**, Ended **3/28/02**

Local Permit Agency **Monterey Co. Health Dept**

Permit No. **01-175** Permit Date **1/8/02**

DWR USE ONLY — DO NOT FILL IN

15S/03E-09N58

STATE WELL NO / STATION NO

LATITUDE LONGITUDE

15S/03E-03N58

APN/TRS/OTHER

GEOLOGIC LOG

ORIENTATION (✓) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DEPTH FROM SURFACE DRILLING METHOD **CABLE** FLUID **Water**

FL to FL DESCRIBE material, grain, size, color, etc.

05	0	64	Sandy Yellow Clay
05	64	92	Sandy Clay
07	92	96	Sand
05	96	100	Sandy Clay
12	100	118	Yellow Clay
03	118	136	Sand & Pea Gravel
12	136	140	Yellow Clay
03	140	196	Sand & Gravel (1" - 8")
07	196	216	Sand
03	216	332	Sand & Gravel (rock to 8")
12	332	334	Yellow Clay
07	334	338	Sand
15	338	362	Blue Clay
03	362	380	Sand & Gravel (1" - 3")
33	380	402	Yellow Clay w/sand
03	402	412	Sand & Gravel (1" - 3")
12	412	418	Yellow Clay
15	418	434	Blue Clay
03	434	494	Sand & Gravel (1" - 4")
12	494	604	Yellow Clay
03	604	620	Sand & Gravel (pea to 2")
	620	652	Brown Clay, streaked with sand
05	652	662	Runny sandy clay
03	662	674	Sand & Gravel (Pea to 2")
07	674	678	Sand
12	678	682	Yellow Clay (td)

TOTAL DEPTH OF BORING **682** (Feet)

TOTAL DEPTH OF COMPLETED WELL **682** (Feet)

WELL LOCATION

Address **Growers St**
City **Salinas CA 93902**
County **Monterey**

APN Book **002** Page **881** Parcel **061**

Township _____ Range _____ Section _____

Latitude _____

DEG. MIN. SEC.

LOCATION SKETCH

NORTH



WEST EAST

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

DEG. MIN. SEC.

ACTIVITY (✓)

☒ NEW WELL
MODIFICATION/REPAIR
— Deepen
— Other (Specify) _____

— DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (✓)

WATER SUPPLY
— Domestic — Public
— Irrigation ☒ Industrial
MONITORING _____
TEST WELL _____
CATHODIC PROTECTION _____
HEAT EXCHANGE _____
DIRECT PUSH _____
INJECTION _____
VAPOR EXTRACTION _____
SPARGING _____
REMEDATION _____
OTHER (SPECIFY) _____

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER **60** (FL) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL **75** (FL) & DATE MEASURED **4/10/02**

ESTIMATED YIELD • **1300** (GPM) & TEST TYPE **Pump Test**

TEST LENGTH **4** (Hrs.) TOTAL DRAWDOWN **208** (FL)

May not be representative of a well's long-term yield.

DEPTH FROM SURFACE		BORE-HOLE DIA. (inches)	CASING (S)						DEPTH FROM SURFACE		ANNULAR MATERIAL								
			TYPE (✓)			MATERIAL / GRADE	INTERNAL DIAMETER (inches)	GAUGE OR WALL THICKNESS			SLOT SIZE IF ANY (inches)	TYPE							
FL	to	FL	BLANK	SCREEN	CON- DUCTOR				FILL PIPE					FL	to	FL	CE- MENT (✓)	BEN- TONITE (✓)	FILL (✓)
0		52	24			✓		STEEL	24	10 ga		10 ga	0		52	✓			
0		334	16			✓		STEEL	16	10 ga dbl		10 ga dbl	0		334	✓			
0		682	12	✓				STEEL	12	10 ga dbl		10 ga dbl							
604		620				✓				.25 x 3.5		.25 x 3.5							
662		674				✓				.25 x 3.5		.25 x 3.5							

ATTACHMENTS (✓)

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analysis
- Other _____

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME **Roy Alsop Pump and Drilling, Inc.**

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

1508 Abbott St

ADDRESS

Signed _____

WELL DRILLER/AUTHORIZED REPRESENTATIVE

Salinas

CITY

CA

STATE

93901

ZIP

10/16/02

DATE SIGNED

C57-569945

C-57 LICENSE NUMBER

ORIGINAL
File with DWR

Page 1 of 2

Owner's Well No. 8029

Date Work Began 11/27/2006, Ended 12/1/2006

Local Permit Agency MONTEREY CNTY HEALTH DEPT

Permit No. 06-10933

Permit Date 9/20/2006

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

No. **E049014**

DWR USE ONLY — DO NOT FILL IN

15S/03E-05R.52

STATE WELL NO./STATION NO.

LATITUDE LONGITUDE

15S/03E-05R.52

APN/TRS/OTHER

GEOLOGIC LOG

WELL OWNER **PRESSURE DEEP**

ORIENTATION (✓)		✓ VERTICAL	HORIZONTAL	ANGLE	(SPECIFY)
DEPTH FROM SURFACE		DRILLING METHOD			
Ft. to Ft.		REVERSE FLUID WATER			
		DESCRIPTION			
		Describe material, grain, size, color, etc.			
0	5	CLAY TOP SOIL			
5	55	SOFT YELLOW CLAY			
55	80	SOFT BLUE CLAY			
80	152	SAND AND GRAVEL WITH CLAY STREAKS			
152	185	YELLOW CLAY			
185	195	SAND			
195	315	BLUE GRAY CLAY WITH SAND STREAKS			
315	340	SAND AND GRAVEL			
340	365	TAN CLAY WITH SAND			
365	535	SAND AND SMALL GRAVEL WITH TAN CLAY STREAKS			
535	612	TAN CLAY WITH SAND AND GRAVEL STREAKS			
612	655	SAND AND SMALL GRAVEL			
655	710	SAND AND SMALL GRAVEL WITH TAN CLAY ST			
710	770	TAN CLAY WITH BLUE CLAY STREAKS			
770	855	SAND AND SMALL GRAVEL			
855	860	BLUE CLAY			

TOTAL DEPTH OF BORING 870 (Feet)

TOTAL DEPTH OF COMPLETED WELL 840 (Feet)

WELL LOCATION

Address 2 MI SOF E BLANCO RD & 4 MI EOF S MAIN

City STREET CA

County MONTEREY

APN Book 207 Page 112 Parcel 005

Township 13 S Range 3 E Section 8 05

Latitude

DEG. MIN. SEC.			DEG. MIN. SEC.		
LOCATION SKETCH			ACTIVITY (✓)		
NORTH			✓ NEW WELL		
WEST			MODIFICATION/REPAIR		
			— Deepen		
			— Other (Specify)		
SOUTH			— DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")		
			PLANNED USES (✓)		
EAST			WATER SUPPLY		
			— Domestic — Public		
			✓ Irrigation — Industrial		
			MONITORING —		
			TEST WELL —		
			CATHODIC PROTECTION —		
			HEAT EXCHANGE —		
			DIRECT PUSH —		
			INJECTION —		
			VAPOR EXTRACTION —		
			SPARGING —		
			REMEDICATION —		
			OTHER (SPECIFY) —		

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER — (Ft.) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL 60.4 (Ft.) & DATE MEASURED 12/8/2006

ESTIMATED YIELD • 1607 (GPM) & TEST TYPE

TEST LENGTH — (Hrs.) TOTAL DRAWDOWN 21.7 (Ft.)

May not be representative of a well's long-term yield.

DEPTH FROM SURFACE			BORE - HOLE DIA. (Inches)	CASING (S)					DEPTH FROM SURFACE			ANNULAR MATERIAL						
				TYPE (✓)				MATERIAL / GRADE				INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	TYPE			
Ft	to	Ft	BLANK	SCREEN	CON- DUCTOR	FILL PIPE									Ft	to	Ft	CE- MENT (✓)
0	360		28					ACCESS TB	2	SCH 40		0	560	✓				SAND SLURRY
0	440		28	✓				ASTM-135	16	.312		560	870			✓		BIRDSEYE GR
440	600		28	✓				ASTM-135	16	.375								
600	710		28		✓			DBL MILLSL	16	.312	.060							
710	770		28	✓				ASTM-135	16	.312								
770	820		28		✓			DBL MILLSL	16	.312	.060							

ATTACHMENTS (✓)

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analysis
- Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME **EATON DRILLING CO.**

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

20 WEST KENTUCKY AVE

ADDRESS

WOODLAND

CITY

CA

STATE

95695

ZIP

Signed

WELL DRILLER/AUTHORIZED REPRESENTATIVE

12/18/06

DATE SIGNED

C57 A HIC - 133783

C-57 LICENSE NUMBER

ORIGINAL
File with DWR

Page 2 of 2

Owner's Well No. 8029

Date Work Began 11/27/2006, Ended 12/1/2006

Local Permit Agency MONTEREY CNTY HEALTH DEPT

Permit No. 06-10933

Permit Date 9/20/2006

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

No. **E049014**

DWR USE ONLY — DO NOT FILL IN

15S/03E-05R.52

STATE WELL NO./STATION NO.

LATITUDE LONGITUDE

15S/03E-05R.52

APN/TRS/OTHER

GEOLOGIC LOG

ORIENTATION (✓) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DRILLING METHOD **REVERSE** FLUID WATER

DEPTH FROM SURFACE		DESCRIPTION
Ft.	to Ft.	Describe material, grain, size, color, etc.
0	5	CLAY TOP SOIL
5	55	SOFT YELLOW CLAY
55	80	SOFT BLUE CLAY
80	152	SAND AND GRAVEL WITH CLAY STREAKS
152	185	YELLOW CLAY
185	195	SAND
195	315	BLUE GRAY CLAY WITH SAND STREAKS
315	340	SAND AND GRAVEL
340	365	TAN CLAY WITH SAND
365	535	SAND AND SMALL GRAVEL WITH TAN CLAY STREAKS
535	612	TAN CLAY WITH SAND AND GRAVEL STREAKS
612	655	SAND AND SMALL GRAVEL
655	710	SAND AND SMALL GRAVEL WITH TAN CLAY ST
710	770	TAN CLAY WITH BLUE CLAY STREAKS
770	855	SAND AND SMALL GRAVEL
855	860	BLUE CLAY

TOTAL DEPTH OF BORING 870 (Feet)

TOTAL DEPTH OF COMPLETED WELL 840 (Feet)

CITY STATE ZIP

WELL LOCATION

Address 2 MI SOF E BLANCO RD & 4 MI EOF S MAIN

City STREET CA

County MONTEREY

APN Book 207 Page 112 Parcel 005

Township 14 S Range 3 E Section 8

Latitude

DEG MIN SEC

LOCATION SKETCH

NORTH

WEST EAST

ACTIVITY (✓)

☒ NEW WELL

MODIFICATION/REPAIR

Deepen

Other (Specify)

DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (✓)

WATER SUPPLY

Domestic Public

☒ Irrigation Industrial

MONITORING

TEST WELL

CATHODIC PROTECTION

HEAT EXCHANGE

DIRECT PUSH

INJECTION

VAPOR EXTRACTION

SPARGING

REMEDIATION

OTHER (SPECIFY)

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER (Ft) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL 60.4 (Ft) & DATE MEASURED 12/8/2006

ESTIMATED YIELD 1607 (GPM) & TEST TYPE

TEST LENGTH (Hrs.) TOTAL DRAWDOWN 21.7 (Ft)

May not be representative of a well's long-term yield.

DEPTH FROM SURFACE			BORE - HOLE DIA. (Inches)	CASING (S)					ANNULAR MATERIAL						
				TYPE (✓)				MATERIAL / GRADE	INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	TYPE			
Ft	to	Ft	BLANK	SCREEN	CONDUCTOR	FILL PIPE									CE- MENT (✓)
820		840	28	✓				ASTM-135	16		.312				SAND SLURRY
														✓	BIRDSEYE GR

ATTACHMENTS (✓)

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analysis
- Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME **EATON DRILLING CO.**

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

20 WEST KENTUCKY AVE

ADDRESS

Signed

WELL DRILLER/AUTHORIZED REPRESENTATIVE

WOODLAND

CITY

CA

STATE

95695


ZIP

12/18/06

DATE SIGNED

C57 A HIC - 133783

C-57 LICENSE NUMBER

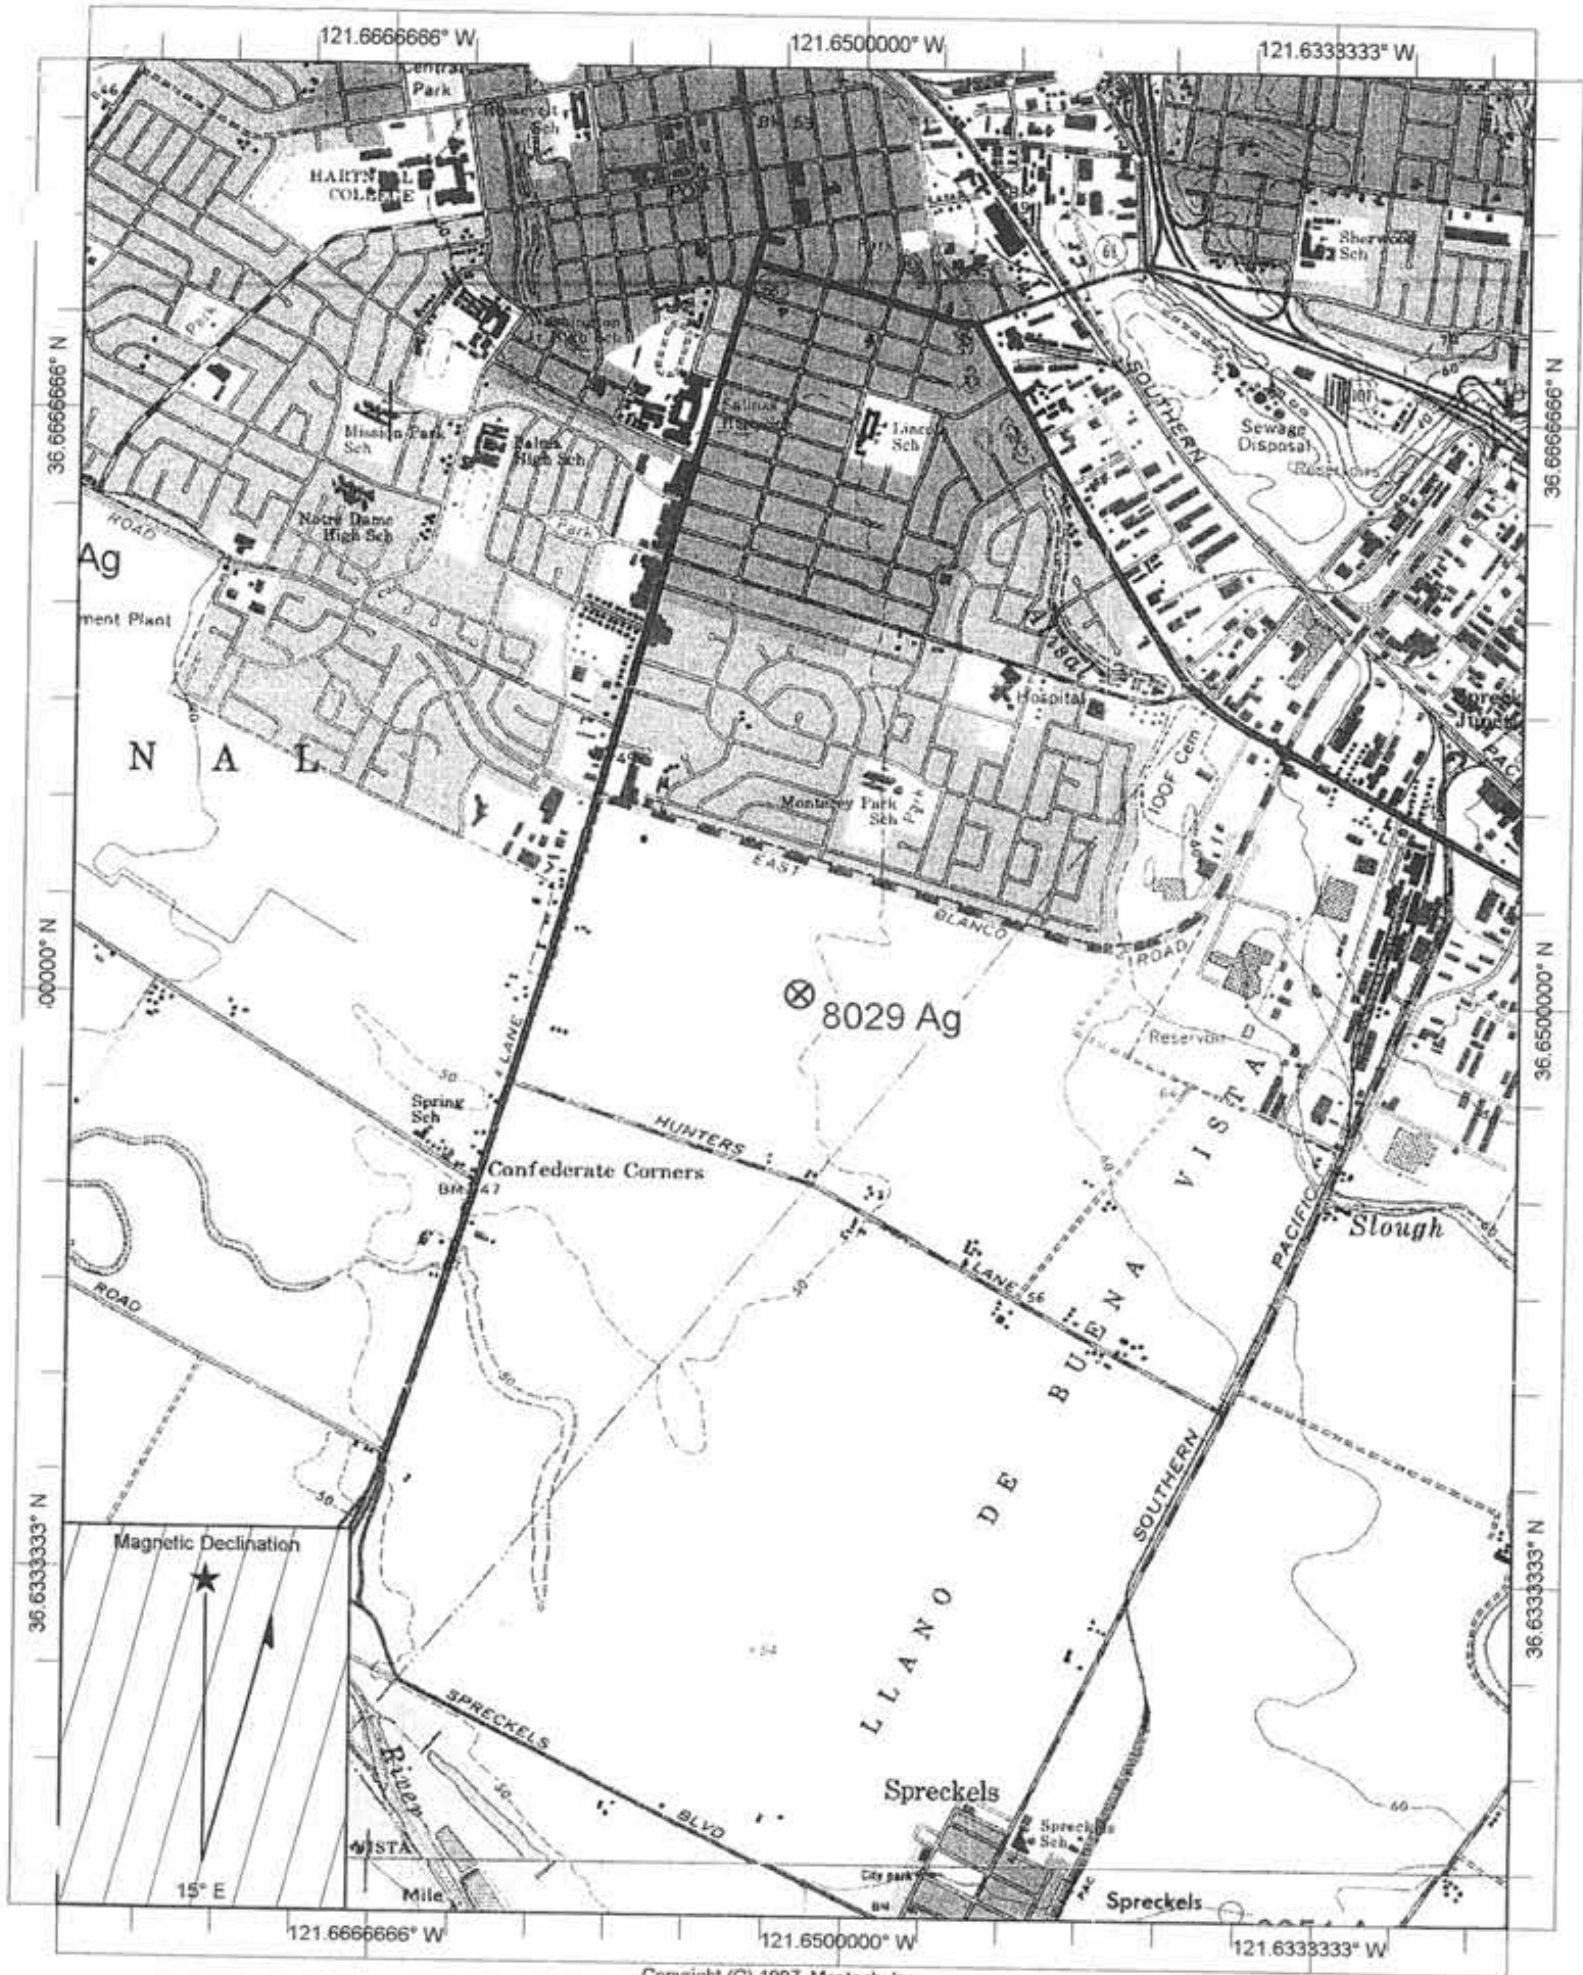

FC 25553

File Original with DWR

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

Page 1 of 4Owner's Well No. 47-01No. e0142945Date Work Began 7/8/11 Ended 10/13/11Local Permit Agency Monterey County Health DeptPermit No. 11-11900 Permit Date 6/3/11

DWR USE ONLY - DO NOT FILL IN

15S103E-10D04

STATE WELL NO./STATION NO.

LATITUDE LONGITUDE

15S103E-10D04

APN/TRS/OTHER

WELL OWNER Pressure 400

GEOLOGIC LOG

ORIENTATION (X) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE ☐ (SPECIFY)

DEPTH FROM SURFACE

FL to Ft.

Describe material, grain size, color, etc.

50	60	Sticky clay
60	70	Sand & gravel
70	80	Sand, gravel, and clay
80	90	Gravel & clay
90	100	Coarse gravel and small gravel
100	110	Rock and gravel, some clay
110	120	Sand, gravel, and rocks
120	130	Clay, gravel, & rocks
130	135	Rocks, gravel, & coarse sand
135	145	Rocks & gravel
145	155	Coarse sand & gravel
155	165	Gravel & rocks
165	170	Coarse gravel and rocks
170	175	Coarse sand
175	195	Sand
195	200	Gravel & rocks
200	210	Gravel
210	215	Sand
215	220	Gravel
220	260	Gravel & sand
260	265	Gravel & clay
265	270	Sand & clay
270	280	Sand, clay, gravel
280	290	Sand, gravel, clay
290	300	Sand, gravel, rocks
300	320	Gravel and rocks
320	330	Clay, small gravel
330	350	Sand
350	355	Sand & rocks
355	360	Sand

TOTAL DEPTH OF BORING 1,495 (Feet)TOTAL DEPTH OF COMPLETED WELL 980 (Feet)

WELL LOCATION

CITY Salinas STATE Ca ZIP 95370

Address 1320 Dayton St

County Monterey

APN Book 177 Page 141 Parcel 073

Township 15S Range 3E Section 3

Latitude 36 38 53.4 NORTH Longitude 121 37 50.2 WEST

LOCATION SKETCH

NORTH

SOUTH

Illustrate or Describe Distance of Well from Roads Buildings, Fences, Rivers etc and attach map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

ACTIVITY (X)

☒ NEW WELL
☐ MODIFICATION/REPAIR
 — Deepen
 — Other (Specify)

DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (X)

WATER SUPPLY
 — Domestic ☒ Public
 — Irrigation ☐ Industrial

MONITORING ☐
TEST WELL ☐
CATHODIC PROTECTION ☐
HEAT EXCHANGE ☐
DIRECT PUSH ☐
INJECTION ☐
VAPOR EXTRACTION ☐
SPARGING ☐
REMEDICATION - OTHER (SPECIFY) ☐

WATER LEVEL & YIELD OF COMPLETED WELLDEPTH TO FIRST WATER Unknown (FL) BELOW SURFACEDEPTH OF STATIC WATER LEVEL 80 (FL) & DATE MEASURED 10/5/11-10/13/11ESTIMATED YIELD 3,000 (GPM) & TEST TYPE Development, Step, ConstantTEST LENGTH 82 (Hrs.) TOTAL DRAWDOWN 58 (FL)

* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE			BORE-HOLE DIA. (Inches)	CASING(S)					DEPTH FROM SURFACE	ANNULAR MATERIAL						
				TYPE (-)				MATERIAL / GRADE		OUTSIDE DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	TYPE			
FL	to	FL	BLANK	SCREEN	COIL	DUCTOR	FILL PIPE		FL				to	FL	CE- MENT (X)	BEN- TONITE (X)
0		50				X		LCS	34	.375	0		575	X		10.3 sack
0		590		X				HSLA	18.75	.375	575		980		X	8x12 Co. Silica
590		600		X				HSLA	18.75	.375						
600		630			X			HSLA	18.75	.312						
630		645		X				HSLA	18.75	.375						
645		775			X			HSLA	18.75	.312						

ATTACHMENTS (X)

- ☒ Geologic Log
☒ Well Construction Diagram
☒ Geophysical Log(s)
☐ Soil/Water Chemical Analyses
☒ Other Test Pump Data & Video Survey

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

Layne Christensen Co.

NAME (PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

1717 W. Park AveRedlandsCA92373

ADDRESS

Signed

WELL DRILLER/AUTHORIZED REPRESENTATIVE

CITY

1/3/2012

STATE

510011

DATE SIGNED

C-57 LICENSE NUMBER

STATE OF CALIFORNIA WELL COMPLETION REPORT

Refer to Instruction Pamphlet

Page 2 of 4

Owner's Well No. 47-01

No. e0142945

Date Work Began 7/8/11 Ended 10/13/11

Local Permit Agency Monterey County Health Dept

Permit No. 11-11900 Permit Date 6/3/11

DWR USE ONLY		DO NOT FILL IN	
STATE WELL NO./STATION NO.			
LATITUDE		LONGITUDE	
APN/TRS/OTHER			

GEOLOGIC LOG

WELL OWNER

ORIENTATION (X) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE ☐ (SPECIFY)

DEPTH FROM SURFACE

FL to Ft.

DRILLING METHOD Flooded Reverse FLUID ☐

DESCRIPTION

Describe material, grain size, color, etc.

360	365	Sand & rocks
365	385	Rocks & gravel
385	400	Clay
400	415	Gravel
415	420	Gravel and rocks
420	425	Clay
425	430	Gravel, sand, and clay
430	435	Clay
435	470	Gravel & rocks
470	475	Clay
475	485	Gravel & sand
485	490	Gravel, sand, and clay
490	515	Sand & gravel
515	520	Sand, gravel, clay
520	525	Sand & clay
525	535	Sand, clay, gravel
535	540	Sand & clay
540	555	Sand, gravel, clay
555	590	Clay & sand
590	595	Clay
595	600	Sand & some clay
600	605	Clay
605	610	Sand
610	615	Gravel, sand, and rocks
615	620	Gravel & rocks
620	630	Sand
630	650	Clay
650	665	Sand
665	675	Sand & gravel
675	680	Sand, gravel, clay

TOTAL DEPTH OF BORING 1,495 (Feet)

TOTAL DEPTH OF COMPLETED WELL 980 (Feet)

CITY Salinas STATE Ca ZIP 95373

WELL LOCATION 1320 Dayton St

Address Salinas City Monterey STATE Ca ZIP 95373

County Monterey

APN Book 177 Page 141 Parcel 073

Township 15S Range 3E Section 3

Latitude 36 38 53.4 NORTH Longitude 121 37 50.2 WEST



Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers etc and attach map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

ACTIVITY (X)

☒ NEW WELL

☐ MODIFICATION/REPAIR

☐ Deepen

☐ Other (Specify)

DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (X)

WATER SUPPLY

☐ Domestic ☒ Public

☐ Irrigation ☐ Industrial

MONITORING ☐

TEST WELL ☐

CATHODIC PROTECTION ☐

HEAT EXCHANGE ☐

DIRECT PUSH ☐

INJECTION ☐

VAPOR EXTRACTION ☐

SPARGING ☐

REMEDICATION - OTHER (SPECIFY) ☐

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER Unknown (Ft.) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL 80 (Ft.) & DATE MEASURED 10/5/11-10/13/11

ESTIMATED YIELD 3,000 (GPM) & TEST TYPE Development, Step, Constant

TEST LENGTH 82 (Hrs.) TOTAL DRAWDOWN 58 (Ft.)

* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE FL to FL	BORE-HOLE DIA. (Inches)	CASING (S)					ANNULAR MATERIAL TYPE
		TYPE (X)	MATERIAL / GRADE	OUTSIDE DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	
775 - 815	28	X	HSLA	18.75	.375		CE- MENT (X)
815 - 855	28	X	HSLA	18.75	.312	.070	BEN- TONITE (X)
855 - 885	28	X	HSLA	18.75	.375		FILL (X)
885 - 950	28	X	HSLA	18.75	.312	.070	FILTER PACK (TYPE/SIZE)
950 - 960	28	X	HSLA Cellar	18.75	.375		

ATTACHMENTS (X)

☒ Geologic Log

☒ Well Construction Diagram

☒ Geophysical Log(s)

☐ Soil/Water Chemical Analyses

☒ Other Test Pump Data & Video Survey

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

Layne Christensen Co.

NAME (PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

1717 W. Park Ave

Redlands CA 92373

ADDRESS

CITY 1/3/2012 STATE 510011

Signed

WELL DRILLER/AUTHORIZED REPRESENTATIVE

DATE SIGNED

C-57 LICENSE NUMBER

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

No. e0142945

Ended 10/13/11

Monterey County Health Dept

Permit Date	6/3/11
-------------	--------

DWR USE ONLY — DO NOT FILL IN
 STATE WELL NO./STATION NO.
 LATITUDE LONGITUDE
 APN/TRS/OTHER

GEOLOGIC LOG

ORIENTATION (X) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE ☐ (SPECIFY)

DEPTH FROM SURFACE ☐ FLOODED REVERSE FLUID ☐

DRILLING METHOD ☐ DESCRIPTION

Describe material, grain size, color, etc.

680	690	Sand
690	700	Clay
700	705	Sand & clay
705	710	Gravel & sand
710	715	Sand & clay
715	720	Sand
720	725	Clay
725	730	Sand
730	740	Gravel
740	745	Sand & clay
745	755	Clay
755	760	Sand
760	770	Gravel
770	820	Clay
820	825	Clay & sand
825	840	Sand
840	845	Sand & clay
845	860	Sand
860	875	Clay
875	880	Clay, sand, gravel
880	890	Clay
890	895	Clay & sand
895	900	Sand & gravel
900	905	Sand, gravel, small rock
905	910	Sand, gravel, clay, small rock
910	920	Sand & gravel
920	935	Clay
935	940	Sand
940	950	Gravel & sand
950	990	Clay

TOTAL DEPTH OF COMPLETED WELL 980 (Feet)

CITY _____ STATE _____ ZIP _____

WELL LOCATION _____

Address _____ 1320 Dayton St _____

City _____ Salinas _____ Ca _____

County _____ Monterey _____ STATE _____ ZIP _____

APN Book _____ 177 _____ Page _____ 141 _____ Parcel _____ 073 _____

Township _____ 15S _____ Range _____ 3E _____ Section _____ 3 _____

Latitude _____ 36 _____ 38 _____ 53.4 NORTH _____ Longitude _____ 121 _____ 37 _____ 50.2 WEST

DEG. MIN. SEC. DEG. MIN. SEC. DEG. MIN. SEC.

LOCATION SKETCH



Illustrate or Describe Distance Of Well from Roads Buildings, Fences, Rivers etc and attach map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

— ACTIVITY (X)

NEW WELL
MODIFICATION/REPAIR
— Deepen
— Other (Specify)

— DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (X)

WATER SUPPLY X Public
Domestic Irrigation Industrial

MONITORING _____
TEST WELL _____
CATHODIC PROTECTION _____
HEAT EXCHANGE _____
DIRECT PUSH _____
INJECTION _____
VAPOR EXTRACTION _____
SPARGING _____
REMEDIATION - _____
OTHER (SPECIFY) _____

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER Unknown (FL) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL 80 (Ft.) & DATE MEASURED 10/5/11-10/13/11

ESTIMATED YIELD 3,000 (GFM) & TEST TYPE Development, Step, Constant

TEST LENGTH 82 (Hrs.) TOTAL DRAWDOWN 58 (FT.)

* May not be representative of a well's long-term yield.

[illegible]

ATTACHMENTS (X)

<u>X</u>	Geologic Log
<u>X</u>	Well Construction Diagram
<u>X</u>	Geophysical Log(s)
<u>X</u>	Soil/Water Chemical Analyses
<u>X</u>	Other Test Pump Data & Video Survey

- CERTIFICATION STATEMENT

1. the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

Layne Christensen Co.

NAME (PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

1717 W. Park Ave

Redlands CA 92373

ADDRESS

CITY 1/3/2012 STATE 51001

Signed _____
WELL DRILLER/AUTHORIZED REPRESENTATIVE

DATE SIGNED _____ C-57 LICENSE NUMBER _____

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

Page 4 of 4

Page of
Owner's Well No. 47-01

No. e0142945

Date Work Began	7/8/11	Ended	10/13/11
-----------------	--------	-------	----------

Local Permit Agency Monterey County Health Dept

Permit No.	11-11900	Permit Date	6/3/11
------------	----------	-------------	--------

GEOLOGIC LOG

WELL OWNER

DWR/USE ONLY — DO NOT FILL IN
 STATE WELL NO./STATION NO.
 LATITUDE LONGITUDE
 APT/TRS/OTHER

[illegible]

WELL OWNER _____			
WELL LOCATION _____			
Address _____		1320 Dayton St	
City _____	Salinas	Ca	STATE
County _____	Monterey	STATE	ZP
APN Book 177	Page 141	Parcel _____	073
Township 15S	Range 3E	Section 3	
Latitude 36 38	53.4 NORTH	Longitude 121 37 50.2 WEST	
DEG. MIN. SEC.	DEG. MIN. SEC.		
LOCATION SKETCH		ACTIVITY (X)	
		☒ NEW WELL ☐ MODIFICATION/REPAIR	
		☐ Deepen ☐ Other (Specify) _____	
		☐ DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")	
		PLANNED USES (X) WATER SUPPLY	
		☐ Domestic ☒ Public ☐ Irrigation ☐ Industrial	
MONITORING _____ TEST WELL _____ CATHODIC PROTECTION _____ HEAT EXCHANGE _____ DIRECT PUSH _____ INJECTION _____ VAPOR EXTRACTION _____ SPARGING _____ REMEDIATION _____ OTHER (SPECIFY) _____			

TOTAL DEPTH OF BORING 1,495 (Feet)
TOTAL DEPTH OF COMPLETED WELL 980 (Feet)

[illegible]

ATTACHMENTS (X) ☒ Geologic Log ☒ Well Construction Diagram ☒ Geophysical Log(s) ☐ Soil/Water Chemical Analyses ☒ Other <u>Test Pump Data & Video Survey</u>		CERTIFICATION STATEMENT I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief. <u>Layne Christensen Co.</u> NAME (PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED) <u>1717 W. Park Ave</u> ADDRESS City <u>Redlands</u> State <u>CA</u> ZIP <u>92373</u> Signed <u>[Signature]</u> DATE SIGNED <u>1/3/2012</u> STATE <u>CA</u> LICENSE NUMBER <u>510011</u> WELL DRILLER/AUTHORIZED REPRESENTATIVE	
--	--	--	--

ORIGINAL
File with DWR

Page 1 of 1

Owner's Well No. 2

Date Work Began 6/3/97 Ended 7/7/97

Local Permit Agency Monterey County Health Dept

Permit No. US/L 97-108

Permit Date 5/30/97

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

No. 510032

DWR USE ONLY - DO NOT FILL IN

158/3E-34L52

STATE WELL NO./STATION NO.

LATITUDE 155/03E LONGITUDE 34L52

APN/TRS/OTHER

GEOLOGIC LOG

ORIENTATION (✓) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DEPTH TO FIRST WATER (Ft.) BELOW SURFACE

DEPTH FROM SURFACE		DESCRIPTION
Ft.	to Ft.	Describe material, grain size, color, etc.
0	2	Top Soil
2	18	Sandstone
18	39	Gravel w/sand
39	80	Sandstone w/clay
80	140	Hard sandstone w/fine sand
140	165	Sandstone
165	172	Gravel & clay
172	228	Sandstone w/ clay
228	256	Hard rock & sandstone
256	340	Sandstone w/yellow clay
340	351	Yellow clay & sand
351	400	Hard sandstone
400	500	Sandstone w/ yellow clay
500	520	Sandstone & clay
520	590	Rock & sandstone
590	680	D.G. w/ sand
680	780	D.G. sand & clay
780	820	Yellow clay w/ sand
820	880	D.G. rock & clay

TOTAL DEPTH OF BORING 880 (Feet)

TOTAL DEPTH OF COMPLETED WELL 800 (Feet)

WELL OWNER

PRESSURE 400

WELL LOCATION

Address 125 Pine Canyon (Salinas)

City Salinas


County Monterey

APN Book Page Parcel 816-649-001

Township Range Section

Latitude NORTH Longitude WEST

LOCATION SKETCH

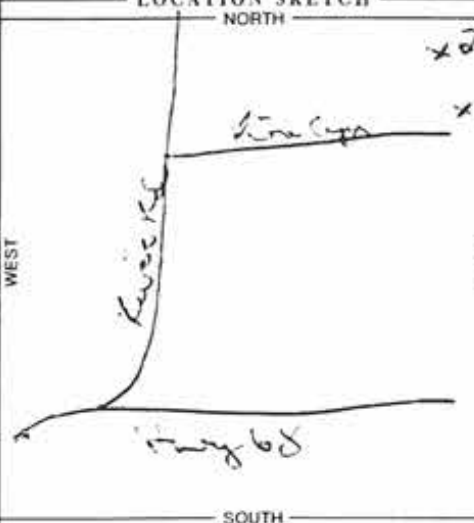

ACTIVITY (✓)

☒ NEW WELL

MODIFICATION/REPAIR

— Deepen

— Other (Specify)

— DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USE(S) (✓)

— MONITORING

WATER SUPPLY

— Domestic

— Public

☒ Irrigation

— Industrial

— "TEST WELL"

— CATHODIC PROTECTION

— OTHER (Specify)

DRILLING METHOD Rotary FLUID Bentonite

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH OF STATIC WATER LEVEL (Ft.) & DATE MEASURED

ESTIMATED YIELD* (GPM) & TEST TYPE

TEST LENGTH (Hrs.) TOTAL DRAWDOWN (Ft.)

* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE			BORE-HOLE DIA. (Inches)	CASING(S)						DEPTH FROM SURFACE			ANNULAR MATERIAL				
				TYPE (✓)				MATERIAL / GRADE	INTERNAL DIAMETER (Inches)				GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	TYPE		
Ft.	to	Ft.		BLANK	SCREEN	CON. DUCTOR	FILL PIPE			CE- MENT (✓)	BEN- TONITE (✓)	FILL (✓)			FILTER PACK (TYPE/SIZE)		
0	220		15	x			Steel	6			0	175		x			
220	300		15	x			Steel	6			175	300			x	3 X 12	
300	360		15	x			Steel	3									
360	800		15	x			Steel	6									

ATTACHMENTS (✓)

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analyses
- Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME Salinas Pump Company

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

ADDRESS 772 Verdin Ave. Salinas, Ca 93901

Signed [Signature]

WELL DRILLER/AUTHORIZED REPRESENTATIVE

DATE SIGNED 7/12/97

515945

C57 LICENSE NUMBER

ORIGINAL
File with DWR

FC 22831

STATE OF CALIFORNIA
WELL COMPLETION REPORT

Refer to Instruction Pamphlet

Page of

Owner's Well No.

No. **717244**

Date Work Began 10-16-00 Ended 10-28-00

Local Permit Agency MONTEREY

Permit No. 00-342 Permit Date 10-16-00

DWR USE ONLY - DO NOT FILL IN

165104E-03G53

STATE WELL NO./STATION NO.

LATITUDE LONGITUDE

165104E-03G53

APN/TRS/OTHER

PRESSURE DEEP CHULAR WELL #4

GEOLOGIC LOG

ORIENTATION () ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DRILLING METHOD ROTARY FLUID NATURAL

DEPTH FROM SURFACE			DESCRIPTION
FL	TO	FI	Describe material, grain size, color, etc.
0	15		top soil
15	47		sand
47	53		clay
53	80		sand & gravel
80	87		clay
87	120		sand & gavel
120	137		clay
137	180		gravel & small rocks
180	200		sand & clay
200	274		sand & gravel
274	290		clay
290	325		sand & gravel
325	332		clay
332	610		sand & garvel
610	660		clay
660	680		sand
680	727		clay
727	735		sand
735	750		clay
750	785		sand & gravel
785	817		clay
817	825		sand & gravel
825	840		clay
840	930		sand & gravel

TOTAL DEPTH OF BORING 930 (Feet)

TOTAL DEPTH OF COMPLETED WELL 920 (Feet)

WELL LOCATION

Address SOUTH & LINCOLN ST.

City SALINAS

County MONTEREY

APN Book 145 Page 151 Parcel 002

Township Range Section

Latitude NORTH WEST

Longitude NORTH WEST

LOCATION SKETCH

WEST EAST

ACTIVITY ()

☒ NEW WELL

MODIFICATION/REPAIR

 Deepen

 Other (Specify)

 DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES ()

WATER SUPPLY

☒ Domestic ☒ Public

 Irrigation Industrial

MONITORING

TEST WELL

CATHODIC PROTECTION

HEAT EXCHANGE

DIRECT PUSH

INJECTION

VAPOR EXTRACTION

SPARGING

REMEDIATION

OTHER (SPECIFY)

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. **PLEASE BE ACCURATE & COMPLETE.**

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER 60 (Feet) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL 60 (Feet) & DATE MEASURED

ESTIMATED YIELD * (GPM) & TEST TYPE

TEST LENGTH (Hrs.) TOTAL DRAWDOWN (Feet)

* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE			BORE-HOLE DIA. (Inches)					CASING (S)				DEPTH FROM SURFACE			ANNULAR MATERIAL			
FL to FL			TYPE ()					MATERIAL / GRADE				FL to FL			TYPE			
			BLANK	SCREEN	COR. BLECTOR	FILL PIPE									CE-MENT	BEN-TONITE	FILL	FILTER PACK (TYPE/SIZE)
0	200	24	X					copper/b	12	3/4	5/16	0	50	x				conductor
200	760	24	X					copper/b	12	3/4	5/16	0	745	x				10 sack
760	900	24		X				high/low	12	3/4	5/16	745	930				X	6x12-1/4" sta
900	920	24	X					high/low	12	3/4	5/16							
0	755							xmild/steel	2"	3/4								
0	50	32		X				mild/steel	26	3/4								

ATTACHMENTS ()

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analyses
- Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

ARTHUR * ORUM WELL DRILLING INC.

NAME

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

3262 E. CONEJO AVE. FRESNO, CA.93725

ADDRESS CITY STATE ZIP 10-30-00 361319

Signed DATE SIGNED C-57 LICENSE NUMBER

WELL DRILLER/AUTHORIZED REPRESENTATIVE

FC 26134

ORIGINAL
File with DWRSTATE OF CALIFORNIA
WELL COMPLETION REPORT

Refer to Instruction Pamphlet

No. **e0102286**

Page 1 of 6

Owner's Well No. [REDACTED]

Date Work Began 4/25/2011, Ended 5/5/2011Local Permit Agency MontereyPermit No. 11-11872Permit Date 3/7/2011

DWR USE ONLY — DO NOT FILL IN

16S/04E-03K01

STATE WELL NO./STATION NO.

LATITUDE 16S/04E-03K01 LONGITUDE

APN/TRS/OTHER

Pressure Deep

WELL OWNER

ORIENTATION (✓) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE ☐ (SPECIFY)				
DEPTH FROM SURFACE		DRILLING METHOD	FLUID WATER/POL	
		REVERSE	DESCRIPTION	
FL to FL		Describe material, grain, size, color, etc.		
0	50	CONDUCTOR		
50	57	CLAY		
57	96	GRAVEL		
96	99	CLAY		
99	148	GRAVEL/ROCK		
148	153	SANDY CLAY		
153	166	GRAVEL/ROCK		
166	177	SAND/GRAVEL		
177	186	GRAVEL/ROCK		
186	199	SAND W/ CLAY STREAKS		
199	208	SANDY CLAY		
208	247	SAND & COBBLES		
247	276	SAND W/ CLAY STREAKS		
276	294	SAND/GRAVEL		
294	315	COBBLES		
315	321	SAND & BRN CLAY		
321	351	SAND/GRAVEL		
351	372	CLAY		
372	383	SAND		
383	391	CLAY		
391	426	SAND/GRAVEL		
426	434	CLAY		
434	441	SANDY CLAY		
441	452	CLAY		
452	464	SAND		
464	472	SANDY CLAY		
472	481	SAND/GRAVEL		
481	489	SANDY CLAY		
489	496	CLAY		
496	519	GRAVEL/ROCK		

TOTAL DEPTH OF BORING 1080 (Feet)TOTAL DEPTH OF COMPLETED WELL 1060 (Feet)

WELL LOCATION

Address Highway 101

City Chualar, CA CA

County MONTEREY

APN Book 145 Page 151 Parcel 004

Township _____ Range _____ Section _____

Latitude _____

DEG. MIN. SEC. _____

LOCATION SKETCH

NORTH

WEST

EAST

ACTIVITY (✓)

☒ NEW WELL

MODIFICATION/REPAIR

— Deepen

— Other (Specify) _____

DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (✓)

WATER SUPPLY

— Domestic — Public

☒ Irrigation — Industrial

MONITORING —

TEST WELL —

CATHODIC PROTECTION —

HEAT EXCHANGE —

DIRECT PUSH —

INJECTION —

VAPOR EXTRACTION —

SPARGING —

REMEDICATION —

OTHER (SPECIFY) _____

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER _____ (FL) BELOW SURFACE

DEPTH OF STATIC

WATER LEVEL _____ (FL) & DATE MEASURED _____

ESTIMATED YIELD * _____ (GPM) & TEST TYPE _____

TEST LENGTH _____ (Hrs.) TOTAL DRAWDOWN _____ (FL)

May not be representative of a well's long-term yield.

DEPTH FROM SURFACE			BORE - HOLE DIA. (Inches)	CASING (S)					DEPTH FROM SURFACE			ANNULAR MATERIAL					
				TYPE (✓)				MATERIAL / GRADE				INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	TYPE		
FL	to	FL	BLANK	SCREEN	CON- DUCTOR FILL PIPE						FL				to	FL	CE- MENT (✓)
0	50	44			✓		STEEL	34	5/16		0	710	✓				
0	200	28	✓				STEEL	16OD	1/4		710	1080				GRAVEL	
200	480	28	✓				STEEL	16OD	5/16								
480	760	28	✓				STEEL	16OD	3/8								
760	762	28	✓				STEEL	16	5/16	TAPER							
762	1060	28		✓			CB STEEL	16ID	5/16	.090							

ATTACHMENTS (✓)

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analysis
- Other _____

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME Myers Well Drilling Inc.

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

11745 2nd Ave.

ADDRESS

Hanford

CITY

CA

STATE

93230

ZIP

Signed _____

WELL DRILLER/AUTHORIZED REPRESENTATIVE

05/11/11

DATE SIGNED

865822

C-57 LICENSE NUMBER

ORIGINAL
File with DWR

Page 3 of 6

Owner's Well No. [REDACTED]

Date Work Began 4/25/2011, Ended 5/5/2011

Local Permit Agency Monterey

Permit No. 11-11872

Permit Date 3/7/2011

WELL COMPLETION REPORT

STATE OF CALIFORNIA
Refer to Instruction Pamphlet

No. e0102286

165 14E 00

3/8

DWR USE ONLY — DO NOT FILL IN	
STATE WELL NO./STATION NO.	
LATITUDE	LONGITUDE
APN/TRS/OTHER	

GEOLOGIC LOG

ORIENTATION (✓) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)
DRILLING METHOD REVERSE FLUID WATER/POL

DEPTH FROM SURFACE
FL to FL
Describe material, grain, size, color, etc.

FL	to	FL	DESCRIPTION
997	1006		SANDY CLAY
1006	1048		ROCK/GRAVEL/SAND
1048	1050		SANDY CLAY
1050	1062		SAND/GRAVEL/ROCK
1062	1080		CLAY

WELL OWNER

Address Higheay 101

City Chualar, CA CA

County MONTEREY

APN Book 145 Page 151 Parcel 004

Township Range Section

Latitude

DEG. MIN. SEC.

LOCATION SKETCH

NORTH

DEG. MIN. SEC.

ACTIVITY (✓)

☒ NEW WELL

MODIFICATION/REPAIR

— Deepen

— Other (Specify)

— DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (✓)

WATER SUPPLY

— Domestic — Public

☒ Irrigation — Industrial

MONITORING

TEST WELL

CATHODIC PROTECTION

HEAT EXCHANGE

DIRECT PUSH

INJECTION

VAPOR EXTRACTION

SPARGING

REMEDIATION

OTHER (SPECIFY)

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER (FL) BELOW SURFACE

DEPTH OF STATIC

WATER LEVEL (FL) & DATE MEASURED

ESTIMATED YIELD (GPM) & TEST TYPE

TEST LENGTH (hrs.) TOTAL DRAWDOWN (FL)

May not be representative of a well's long-term yield.

DEPTH FROM SURFACE			BORE-HOLE DIA. (Inches)	CASING (S)				
FL	to	FL		TYPE (✓)	MATERIAL / GRADE	INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)
				BLANK SCREEN CONDUIT FILL PIPE				
0	50	44		✓	STEEL	34	5/16	
0	200	28	✓		STEEL	16OD	1/4	
200	480	28	✓		STEEL	16OD	5/16	
480	760	28	✓		STEEL	16OD	3/8	
760	762	28	✓		STEEL	16	5/16	TAPER
762	1080	28	✓		CB STEEL	16ID	5/16	.090

DEPTH FROM SURFACE			ANNULAR MATERIAL			
FL	to	FL	TYPE			
			CE-MENT (✓)	BEN-TOHITE (✓)	FILL (✓)	FILTER PACK (TYPE/SIZE)
0	710		✓			
710	1080					GRAVEL

ATTACHMENTS (✓)

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analysis
- Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME Myers Well Drilling Inc.

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

11745 2nd Ave.

ADDRESS

Hanford

CITY

CA

STATE

93230

ZIP

Signed

WELL DRILLER/AUTHORIZED REPRESENTATIVE

05/11/11

DATE SIGNED

865822

C-57 LICENSE NUMBER

ORIGINAL
File with DWR

Page 5 of 6

Owner's Well No. [REDACTED]

Date Work Began 4/25/2011, Ended 5/5/2011

Local Permit Agency Monterey

Permit No. 11-11872

Permit Date 3/7/2011

STATE OF CALIFORNIA
WELL COMPLETION REPORT

Refer to Instruction Pamphlet

No. **e0102286**

16S14E00

5/8

DWR USE ONLY — DO NOT FILL IN	
STATE WELL NO./STATION NO.	
LATITUDE	LONGITUDE
APN/TRS/OTHER	

GEOLOGIC LOG

WELL OWNER

ORIENTATION (✓) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)
DRILLING METHOD **REVERSE** FLUID **WATER/POL**

DEPTH FROM SURFACE
FL to FL
DESCRIPTION
Describe material, grain, size, color, etc.

519	528	SANDY CLAY
528	537	CLAY
537	544	SANDY CLAY
544	571	GRAVEL/ROCK
571	584	SANDY CLAY
584	591	CLAY
591	594	SANDY CLAY
594	611	SAND/GRAVEL
611	629	CLAY
629	640	SANDY CLAY
640	646	CLAY
646	678	SAND/GRAVEL
678	693	SANDY CLAY
693	731	CLAY
731	740	SANDY CLAY
740	756	CLAY
756	804	SM COBBLES & GRAVEL
804	818	SANDY CLAY
818	831	SAND/GRAVEL/ROCK
831	843	CLAY
843	856	GRAVEL/ROCK
856	868	SANDY CLAY
868	875	COBBLE/GRAVEL
875	927	SAND/GRAVEL/ROCK
927	934	SANDY CLAY
934	941	GRAVEL/ROCK
941	960	SANDY CLAY
960	974	GRAVEL/SAND/ROCK
974	983	SANDY CLAY
983	997	CLAY

WELL LOCATION

Address **Higheay 101**
City **Chualar, CA CA**
County **MONTEREY**
APN Book **145** Page **151** Parcel **004**
Township _____ Range _____ Section _____
Latitude _____

LOCATION SKETCH

WEST	NORTH	SOUTH	EAST	ACTIVITY (✓) ☒ NEW WELL MODIFICATION/REPAIR — Deepen — Other (Specify) — DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG") PLANNED USES (✓) WATER SUPPLY — Domestic — Public ☒ Irrigation — Industrial MONITORING — TEST WELL — CATHODIC PROTECTION — HEAT EXCHANGE — DIRECT PUSH — INJECTION — VAPOR EXTRACTION — SPARGING — REMEDIATION — OTHER (SPECIFY) —

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER _____ (FL) BELOW SURFACE
DEPTH OF STATIC
WATER LEVEL _____ (FL) & DATE MEASURED _____
ESTIMATED YIELD * _____ (GPM) & TEST TYPE _____
TEST LENGTH _____ (Hrs.) TOTAL DRAWDOWN _____ (FL)
May not be representative of a well's long-term yield.

TOTAL DEPTH OF BORING **1080** (Feet)

TOTAL DEPTH OF COMPLETED WELL **1060** (Feet)

DEPTH FROM SURFACE FL to FL	BORE-HOLE DIA. (Inches)	CASING (S)					DEPTH FROM SURFACE FL to FL	ANNULAR MATERIAL			
		TYPE (✓)	MATERIAL / GRADE	INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)		CE- MENT (✓)	BEN- TONITE (✓)	FILL (✓)	FILTER PACK (TYPE/SIZE)
0	50	44					0	710	✓		
0	200	28	✓	STEEL	16OD	1/4	710	1080			GRAVEL
200	480	28	✓	STEEL	16OD	5/16					
480	760	28	✓	STEEL	16OD	3/8					
760	762	28	✓	STEEL	16	5/16					
762	1060	28	✓	CB STEEL	16ID	5/16					

ATTACHMENTS (✓)

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analysis
- Other _____

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME **Myers Well Drilling Inc.**
(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

11745 2nd Ave.
ADDRESS

Hanford
CITY

CA 93230
STATE ZIP

Signed _____
WELL DRILLER/AUTHORIZED REPRESENTATIVE

05/11/11
DATE SIGNED

865822
C-57 LICENSE NUMBER

ORIGINAL
File with DWR

Page 6 of 6

Owner's Well No. [REDACTED]

Date Work Began 4/25/2011, Ended 5/5/2011

Local Permit Agency Monterey

Permit No. 11-11872

STATE OF CALIFORNIA
WELL COMPLETION REPORT

Refer to Instruction Pamphlet

No. **e0102286**

16S 14E 00 6/8

DWR USE ONLY — DO NOT FILL IN	
STATE WELL NO./STATION NO.	
LATITUDE	LONGITUDE
APN/TRS/OTHER	

GEOLOGIC LOG

ORIENTATION (✓) ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)
DRILLING METHOD **REVERSE** FLUID **WATER/POL**

DEPTH FROM SURFACE
FL to FL
DESCRIPTION
Describe material, grain, size, color, etc.

997	1006	SANDY CLAY
1006	1048	ROCK/GRAVEL/SAND
1048	1050	SANDY CLAY
1050	1062	SAND/GRAVEL/ROCK
1062	1080	CLAY

WELL OWNER

WELL LOCATION

Address **Higheay 101**

City **Chualar, CA CA**

County **MONTEREY**

APN Book **145** Page **151** Parcel **004**

Township _____ Range _____ Section _____

Latitude _____

DEG. MIN. SEC.

LOCATION SKETCH

NORTH

DEG. MIN. SEC.

ACTIVITY (✓)

☒ NEW WELL

MODIFICATION/REPAIR

— Deepen

— Other (Specify)

— DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USES (✓)

WATER SUPPLY

— Domestic

☒ Irrigation — Public Industrial

MONITORING

TEST WELL

CATHODIC PROTECTION

HEAT EXCHANGE

DIRECT PUSH

INJECTION

VAPOR EXTRACTION

SPARGING

REMEDICATION

OTHER (SPECIFY)

WEST

EAST

SOUTH

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER (FL) BELOW SURFACE

DEPTH OF STATIC

WATER LEVEL (FL) & DATE MEASURED

ESTIMATED YIELD (GPM) & TEST TYPE

TEST LENGTH (Hrs.) TOTAL DRAWDOWN (FL)

May not be representative of a well's long-term yield.

TOTAL DEPTH OF BORING **1080** (Feet)

TOTAL DEPTH OF COMPLETED WELL **1060** (Feet)

DEPTH FROM SURFACE FL to FL	BORE-HOLE DIA. (Inches)	CASING (S)						ANNULAR MATERIAL TYPE		
		TYPE (✓) BLANK SCREEN CON- DUCTOR FILL PIPE	MATERIAL / GRADE	INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)				
0 to 710							CE- MENT (✓)	BEN- TONITE (✓)	FILL (✓)	FILTER PACK (TYPE/SIZE)
710 to 1080										GRAVEL

ATTACHMENTS (✓)

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analysis
- Other

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME **Myers Well Drilling Inc.**

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

11745 2nd Ave.

ADDRESS

Hanford

CITY

CA 93230

STATE

ZIP

Signed

WELL DRILLER/AUTHORIZED REPRESENTATIVE

05/11/11

DATE SIGNED

865822

C-57 LICENSE NUMBER

Steve Vagnini, County Assessor

General Information

APN:	145-151-004-000	Use Type:	AGRICULTURAL PRESERVE
Site Address:		Tax Rate Area:	065-032
Mailing Address:			
Legal Description:	AGP 68-054		



**The information provided here is deemed reliable, but is not guaranteed.

TRIMCATE
Owner's Copy
Page 1 of 2

Owner's Well No. _____

Date Work Began 11/30/96 , Ended 12/10/96

Local Permit Agency Monterey County Health Dept.

Permit No. WSAL 96-273 Permit Date 11/26/96

STATE OF CALIFORNIA

WELL COMPLETION REPORT

Refer to Instruction Pamphlet

No. **507958**

DWR USE ONLY - DO NOT FILL IN

1.6S/04E-111D51	
STATE WELL NO./STATION NO.	
LATITUDE	
LONGITUDE	
1.6S/04E-111D51	
APN/TRS/OTHER	

WELL OWNER PRESSURE-400/DEEP

GEOLOGIC LOG

ORIENTATION () ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE (SPECIFY)

DEPTH FROM SURFACE		DESCRIPTION <i>Describe material, grain size, color, etc.</i>
Ft.	to Ft.	
0	4	top soil
4	10	yellow sandy clay
10	82	gravel & rocks
82	90	brown clay
90	115	gravel
115	121	sand
121	127	gravel
127	140	tan clay
140	156	gravel 16
156	169	tan clay 13
169	179	gravel 14
179	184	brown clay 5
184	228	gravel 4 4
228	232	brown clay 4
232	280	gravel 4 5
280	307	brown clay & gravel 2 7
307	323	red clay
323	435	gravel
435	438	brown clay
438	505	gravel
505	520	red clay
520	525	tan clay
525	553	gravel streaks sand
553	558	brown clay
558	618	gravel
618	626	brown clay
626	641	brown clay & gravel
641	659	gravel
659	667	brown clay
667	681	brown clay streaks gravel
TOTAL DEPTH OF BORING		1015 (Feet)
TOTAL DEPTH OF COMPLETED WELL		1000 (Feet)

WELL LOCATION

City Salinas, Ca. STATE CA ZIP 94706

Address Hwy. 101 - Gonzales

City Chualar

County Monterey

APN Book 145 Page 011 Parcel 06

Township _____ Range _____ Section _____

Latitude _____ Longitude _____

DEG. MIN. SEC. NORTH Longitude DEG. MIN. SEC. WEST

LOCATION SKETCH

NORTH _____ SOUTH _____

WEST _____ EAST _____

Illustrate or Describe Distance of Well from Landmarks such as Roads, Buildings, Fences, Rivers, etc. PLEASE BE ACCURATE & COMPLETE.

ACTIVITY ()

☒ NEW WELL

MODIFICATION/REPAIR

_____ Deepen

_____ Other (Specify)

DESTROY (Describe Procedures and Materials Under "GEOLOGIC LOG")

PLANNED USE(S)

()

_____ MONITORING

WATER SUPPLY

_____ Domestic

_____ Public

☒ Irrigation

_____ Industrial

_____ "TEST WELL"

_____ CATHODIC PROTECTION

_____ OTHER (Specify)

DRILLING METHOD Reverse Rotary FLUID mud

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH OF STATIC WATER LEVEL 64 (Ft.) & DATE MEASURED 12/14/96

ESTIMATED YIELD 3200 (GPM) & TEST TYPE pump

TEST LENGTH 8 (Hrs.) TOTAL DRAWDOWN 40 (Ft.)

* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE		BORE-HOLE DIA. (Inches)	CASING(S)						DEPTH FROM SURFACE		ANNULAR MATERIAL					
			TYPE ()				MATERIAL / GRADE	INTERNAL DIAMETER (Inches)			GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)	TYPE			
			BLANK	SCREEN	CON- DUCTOR	FILL PIPE			Ft.	to			Ft.	CE- MENT ()	BEN- TONITE ()	FILL ()
0	480	25	x				MildSteel	16	1/8		0	525	x	10	sack	sand
480	540	25	x				CB	16	1/8							slurry
540	990	25	xx				CB	16	1/8	3/32	525	1000				well pack
990	1000	25	x				CB	16	1/8							

ATTACHMENTS ()

☒ Geologic Log

_____ Well Construction Diagram

_____ Geophysical Log(s)

_____ Soil / Water Chemical Analyses

_____ Other _____

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME L. E. Melville & Son Drilling Co., Inc.

(PERSON, FIRM, OR CORPORATION) (TYPED OR PRINTED)

19730 Pinehurst Ln. Salinas, Ca. 93906

ADDRESS CITY STATE ZIP

Signed James C. Melville DATE SIGNED 1/3/96 C 57 LICENSE NUMBER 675586

WELL DRILLER / AUTHORIZED REPRESENTATIVE

ORIGINAL
File with DWR

Page 1 of 1

Owner's Well No. _____

Date Work Began 3/14/00, Ended 4/12/00

Local Permit Agency Monterey County Health Dept

Permit No. 00-041

STATE OF CALIFORNIA
WELL COMPLETION REPORT
Refer to Instruction Pamphlet

No. **793603**

Permit Date 3/3/00

DWR USE ONLY - DO NOT FILL IN

STATE WELL NO./STATION NO. 175/041E-011L512

LATITUDE 175/041E-011L512 LONGITUDE 175/041E-011L512

APN/TRACT/OTHER _____

ORIENTATION () ☒ VERTICAL ☐ HORIZONTAL ☐ ANGLE _____ (SPECIFY) _____

DRAWING METHOD Rotary FLUID mud

DESCRIPTION

Describe material, grain size, color, etc.

DEPTH FROM SURFACE	FL	TO	FL	DESCRIPTION
0	4			top soil
4	40			gravel
40	62			Salinas Valley gravel
62	84			gray clay
84	154			Salinas Valley gravel
154	203			tan clay
203	254			brown sand & fine gravel
254	260			brown clay
260	286			gravel
286	294			brown clay
294	323			gravel
323	331			brown clay
331	360			gravel
360	386			tan clay
386	400			gravel
400	416			tan clay
416	470			Salinas Valley gravel
470	480			brown clay
480	504			gravel
504	630			brown clay streaked gravel
630	666			brown clay
666	680			gravel
680	706			brown clay
706	760			gravel
760	804			brown clay

TOTAL DEPTH OF BORING 804 (Feet)

TOTAL DEPTH OF COMPLETED WELL 770 (Feet)

WELL LOCATION

Address 1625 River Rd

City Gonzales


County Monterey

APN Book 216 Page 032 Parcel 014

Township _____ Range _____ Section _____

Latitude _____ Longitude _____

LOCATION SKETCH

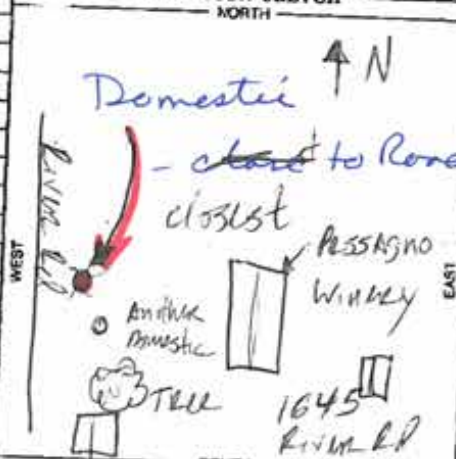

Illustrate or Describe Distance of Well from Roads, Buildings, Fences, Rivers, etc. and attach a map. Use additional paper if necessary. PLEASE BE ACCURATE & COMPLETE.

WATER LEVEL & YIELD OF COMPLETED WELL

DEPTH TO FIRST WATER 30 (FL) BELOW SURFACE

DEPTH OF STATIC WATER LEVEL 30 (FL) & DATE MEASURED 4/20/00

ESTIMATED YIELD 55 (GPM) & TEST TYPE pump

TEST LENGTH 8 (Min.) TOTAL DRAWDOWN 100 (FL)

* May not be representative of a well's long-term yield.

DEPTH FROM SURFACE	FL	TO	FL	BORE-HOLE DIA. (Inches)	CASING (S)				
					TYPE ()	MATERIAL / GRADE	INTERNAL DIAMETER (Inches)	GAUGE OR WALL THICKNESS	SLOT SIZE IF ANY (Inches)
0	640			14	x	NonCopper	6 5/8	1	
640	670			14	x	SS	6 5/8	2	
670	770			14	x	wire wrap		2	.065

DEPTH FROM SURFACE	FL	TO	FL	ANNULAR MATERIAL			
				CE-MENT ()	BEN-TONITE ()	FILL ()	FILTER PACK (TYPE/SIZE)
0	660			x	10	sack	sand
							slurry
660	770						x well pack

ATTACHMENTS ()

- Geologic Log
- Well Construction Diagram
- Geophysical Log(s)
- Soil/Water Chemical Analyses
- Other _____

ATTACH ADDITIONAL INFORMATION, IF IT EXISTS.

CERTIFICATION STATEMENT

I, the undersigned, certify that this report is complete and accurate to the best of my knowledge and belief.

NAME L.E. Melville & Son Drilling Co., Inc.

PERSON, FIRM OR CORPORATION (TYPE OR PRINTED)

ADDRESS 19730 Pinehurst Lane Salinas, Ca. 93906

CITY STATE ZIP

Signed _____

WELL DRILLER/AUTHORIZED REPRESENTATIVE

DATE SIGNED 8/11/03

C-17 LICENSE NUMBER 675586

IF ADDITIONAL SPACE IS NEEDED, USE NEXT CONSECUTIVELY NUMBERED FORM